



确认此型号所有图纸 签字确认:

GENERAL TOLERANCE: ±0.2

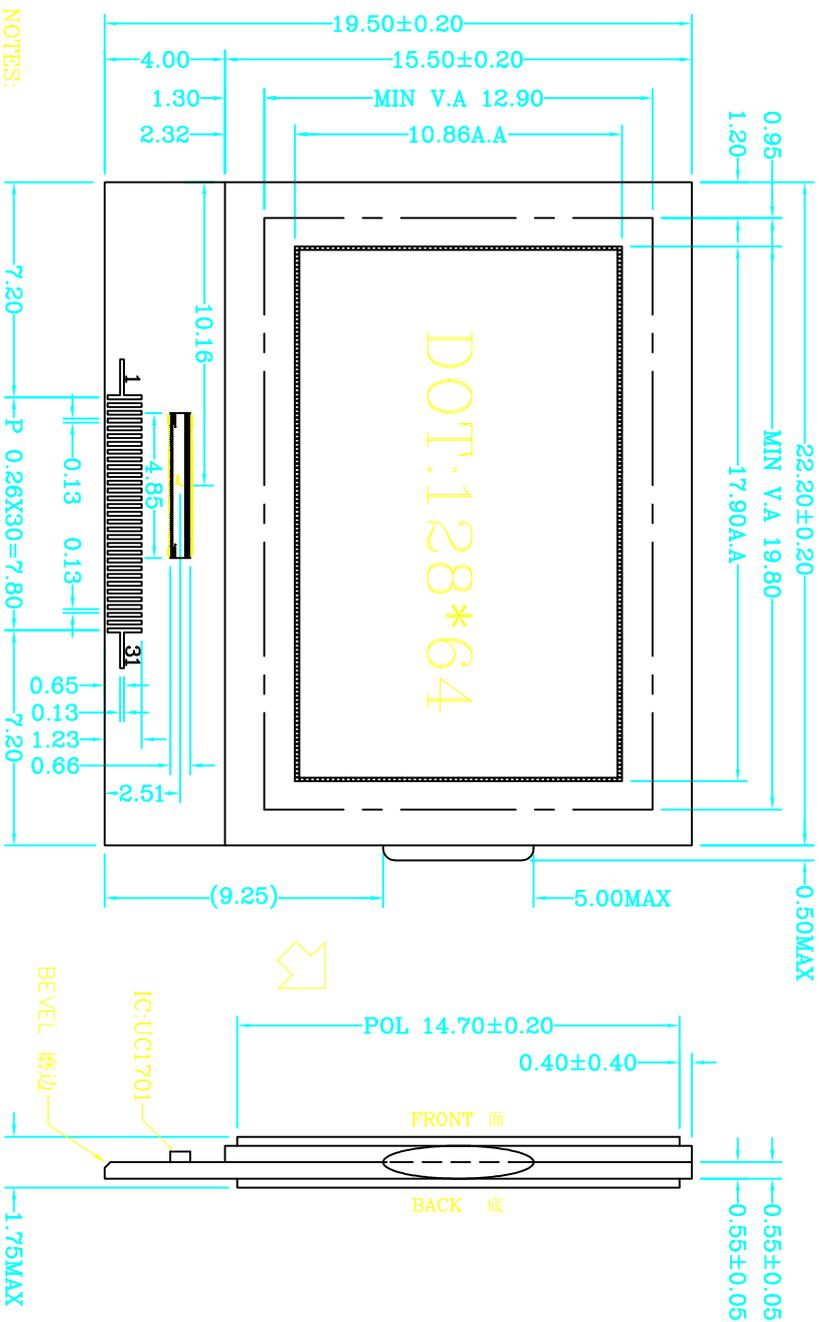

PIN	DESC	PIN	DESC
1	VDD	16	VSS
2	BM1	17	VDD2
3	BMO	18	D7
4	VSS	19	D6
5	VLCD	20	D5
6	NC	21	D4
7	NC	22	D3
8	NC	23	D2
9	NC	24	D1
10	VB1+	25	D0
11	VB1-	26	VDD
12	VB0-	27	/RD
13	VB0+	28	/WR
14	NC	29	A0
15	NC	30	RESET
		31	CS0



- NOTES:
1. DISPLAY TYPE: FSTN
 2. LCD OPERATING VOLTAGE: 8.0V 64Hz
 3. OPERATING TEMPERATURE: -10°C~60°C
 4. STORAGE TEMPERATURE: -20°C~70°C
 5. DRIVE MODE: 1/64D,1/9B
 6. VIEWING DIRECTION: 6:00
 7. POLARIZER TYPE: TRANSMISSIVE,NEGATIVE
 8. CONNECTOR: COG/FPC
 9. CUSTOMER'S MODEL NO.: S1002

SHEET: 1 OF 3				MODULE NUMBER:			TEL:0755-61196590	
GENERAL TOL: ±0.20 MM				SD-10CMP3			FAX:0755-22145294	
CUS NO:		DO NOT SCALE THIS DRAWING.		PROJECTION	DATE: 27-MAR-2012		松本国际股份有限公司	
DRAW BY:	ZXM						S00B00 INTERNATIONAL CO., LTD	
CHK BY:	LQIN							
APP BY:	85							