


Snake Scope User Guide

USB蛇管内窥镜使用说明


- Handheld Endoscope
- Flexible Cable
- USB 2.0 Connection
- Snapshot Button
- Adjustable Dimmer LED Lighting
- Windows XP/Windows 7/Windows Vista/Mac OSX 10.4/Linux Kernel V2.6
- 手持式内窥镜
- 可定型金属软管
- USB 2.0 接口
- 拍照快捷键
- 调LED灯控制器

A handy pipeline inspection device helps you search inside hard to reach places.

这款手持管道检测设备可帮助您检测任何肉眼无法看到的地方

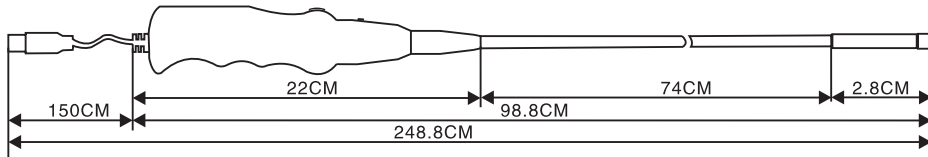

- PC handler
- Flexible cable neck with handler:96cm long
- Flexible cable neck:74cm long (2.4ft)
- Flexible cable neck diameter:6.5mm (0.25in)
- USB cable:150cm (4.9ft) USB 2.0 interface
- Water resistant camera head with 6 dimmable white LED lighting
- Camera head outer diameter is 7.0mm(0.275in)
- 1/12' VGA CMOS: 640 x 480 pixels
- Lens: F#:2.8 viewable of angle 60 degree
- Focal distance:3cm ~ infinite
- Frame Rate up to 30fps@ VGA resolution
- Snapshot & LED lighting adjustable
- P C 手柄
- 定型蛇管和手柄总长: 96cm
- 定型蛇管长:74cm (2.4ft)
- 定型蛇管直径:6.5mm (0.25in)
- USB线总长:150cm(4.9ft) USB 2.0接口
- 探头防水,顶部带6颗高亮LED
- 探头外径: 7.0mm (0.275in)
- 1/12' VGA CMOA: 像素:640 x 480
- 镜头: F#:2.8 视场角: 60度
- 焦距: 3cm~无限远
- 帧率: 30fps
- 快捷拍照按钮 & LED灯光调节器

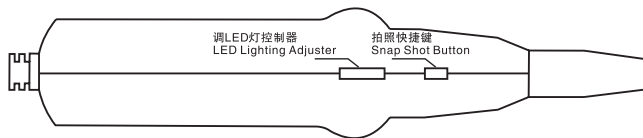

Carry Case Contents

- USB endoscope
- Application CD
- 90 degree mirror accessory(selectable)
- 2M USB cable(selectable)

包装及配件

- USB内窥镜
- 附CD光盘
- 90度侧视反光镜(可选)
- 2米USB延长数据线(可选)

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.




Snake Scope User Guide

USB蛇管内窥镜使用说明


- Handheld Endoscope
- Flexible Cable
- USB 2.0 Connection
- Snapshot Button
- Adjustable Dimmer LED Lighting
- Windows XP/Windows 7/Windows Vista/Mac OSX 10.4/Linux Kernel V2.6
- 手持式内窥镜
- 可定型金属软管
- USB 2.0 接口
- 拍照快捷键
- 调LED灯控制器

A handy pipeline inspection device helps you search inside hard to reach places.

这款手持管道检测设备可帮助您检测任何肉眼无法看到的地方

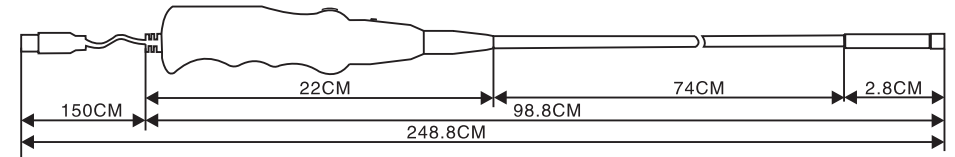

- PC handler
- Flexible cable neck with handler:96cm long
- Flexible cable neck:74cm long (2.4ft)
- Flexible cable neck diameter:6.5mm (0.25in)
- USB cable:150cm (4.9ft) USB 2.0 interface
- Water resistant camera head with 6 dimmable white LED lighting
- Camera head outer diameter is 7.0mm(0.275in)
- 1/12' VGA CMOS: 640 x 480 pixels
- Lens: F#:2.8 viewable of angle 60 degree
- Focal distance:3cm ~ infinite
- Frame Rate up to 30fps@ VGA resolution
- Snapshot & LED lighting adjustable
- P C 手柄
- 定型蛇管和手柄总长: 96cm
- 定型蛇管长:74cm (2.4ft)
- 定型蛇管直径:6.5mm (0.25in)
- USB线总长:150cm(4.9ft) USB 2.0接口
- 探头防水,顶部带6颗高亮LED
- 探头外径: 7.0mm (0.275in)
- 1/12' VGA CMOA: 像素:640 x 480
- 镜头: F#:2.8 视场角: 60度
- 焦距: 3cm~无限远
- 帧率: 30fps
- 快捷拍照按钮 & LED灯光调节器

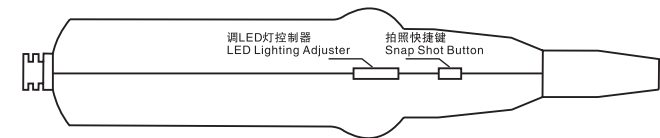

Carry Case Contents

- USB endoscope
- Application CD
- 90 degree mirror accessory(selectable)
- 2M USB cable(selectable)

包装及配件

- USB内窥镜
- 附CD光盘
- 90度侧视反光镜(可选)
- 2米USB延长数据线(可选)

WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

