

ESD-SMD Multilayer chip Varistor

RL0603-3220A series



Applications


1. CMOS and MOSFET protection from ESD
2. Computer ESD and I/O protection
3. Telecommunication transient protection
 - USB2.0 port, IEEE-1394, RF module, Antenna circuit, high speed Protocol Etc.

Features

1. Excellent ESD clamping & Small Insertion Loss
2. High transient current capability, Fastest response time
3. Capacitance is designed to ultra-low value, which can be efficiently suitable to high speed data line.
4. EU-RoHS Compliance

Product Name

R	L	0	6	0	3	A	3	R	3	X
Brand Name		EIA				Type	Varistor Voltage		Remarks	
		0603				A:				
		0805								
		1206								
		1210								
		1812								
		2220								
		3220								

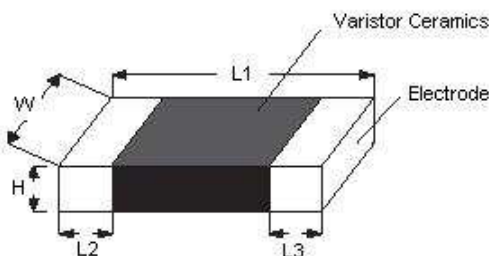


EIA	L1(mm)	W(mm)	H(mm)	L2&L3(mm)
0603	1.60±0.15	0.80±0.15	0.95	0.35±0.15
0805	2.00±0.15	1.25±0.20	1.20	0.40±0.20
1206	3.20±0.30	1.60±0.20	1.50	0.50±0.20
1210	3.20±0.30	2.50±0.25	1.50	0.50±0.20
1812	4.50±0.40	3.20±0.30	1.50	0.60±0.30
2220	5.70±0.40	5.00±0.30	2.00	0.60±0.30
3220	8.10±0.30	5.00±0.30	3.00	0.80±0.30

Electrical Characteristics (@ TA = 25 °C Unless Otherwise Noted)

Part Number							Working Voltage		Breakdown Voltage		Peak Current	Clamping Voltage	
							AC	DC	@ 1mA DC		8/20uS	8/20uS	
							VRMS	VDC	VB		Ip(MAX)	VC	A
0603	0805		RL****A3R3K	1.4	2	3.3	2.6~4.0	0603 10A~30A	9	1			
			RL****A5R0K	2.4	3.3	5	4.0~6.0		12	1			
			RL****A8R0K	4	5.5	8	6.6~9.9		14	1			
			RL****A120K	7	9	12	10~15.5		24	1			
		1206	RL****A180K	11	14	18	15~20.5	30	1~10				
			RL****A210K	12	16	21	17~24	35	1~10				
			RL****A240K	14	18	24	22~27	38	1~10				
			RL****A270K	17	22	27	24~30	42	1~10				
		1210	1812	RL****A300K	19	24	30	27~33	0805 60A~100A	47	1~10		
				RL****A330K	20	26	33	29~36	54	1~10			
				RL****A370K	21	27	37	33~40.5	60	1~10			
				RL****A390K	24	30	39	35~42	65	1~10			
			2220	RL****A470K	28	36	47	42~52.5	1206 80A~150A	77	1~10		
				RL****A530K	30	42	53	47~58.5	85	1~10			
				RL****A560K	35	45	56	51~62	90	1~10			
				RL****A600K	36	47	60	53~66	98	1~10			
	3220		RL****A680K	40	56	68	61~75	1210 250A~500A	110	1~10			
			RL****A760K	45	60	76	68~84	120	1~10				
			RL****A820K	50	65	82	74~92	1812 400A~800A	135	1~10			
			RL****A900K	52	68	90	80~100	150	1~10				
		RL****A101K	60	85	100	90~110	165	2.5~10					
		RL****A121K	75	100	120	108~132	200	2.5~10					
		RL****A151K	95	125	150	135~165	2220 1000A~2000A	250	2.5~10				
		RL****A181K	115	150	180	162~198	300	5~10					
		RL****A201K	130	170	205	184~225	340	5~10					
		RL****A221K	140	180	220	198~242	3220 500A~800A	360	5~10				
		RL****A241K	150	200	240	216~264	395	5~10					
		RL****A271K	175	225	270	243~297	455	5~10					
		RL****A361K	230	300	360	324~396	595	5~10					
		RL****A391K	250	320	390	351~429	650	5~10					
		RL****A431K	275	350	430	387~473	710	5~10					
		RL****A471K	300	385	470	423~517	775	5~10					

Electrical Rating

No	Item	Requirements	Test method
1	Operation Range	1. -40°C ~ 85°C	
2	Leakage current	1. Satisfaction to the specification, under 1uA	1. Applied voltage : specified working voltage
3	Capacitance	1. Satisfaction to the specification, under 1pF	1. Frquency & OSC level : 1MHz, 1.0Vrms
4	Solderability	1. More than 90% of the terminal electrode shall be covered with new solder.	1. Type of solder : H63A 2. Soldering Temp & Time : 230+/-5°C, 5+/-1 sec
5	Reflow soldering	1. No Serious mechanical damage 2. More than 50% of the terminal electrode shall be covered with new solder 3. Leakage Current : ≤ 10uA	1. Type of solder : H63A 2. Temp & Time : max 260+/-5°C, min 10sec * Refer to the soldering profile of page 6
6	Humidity Load Test	1. No Serious mechanical damage 2. Leakage Current : ≤ 10uA	1. Test Temp. & Relative Humidity & Time : 85+/- 5°C, 85 +/- 5% RH, Vw Applied, 500 +/- 12hrs
7	Thermal Shock		1. Step 1 : -40 +/- 5°C, Step 2 : 85 +/- 5°C 2. Cycle : 30min ± 3min, each 5 cycles
8	High Temp. Test		1. Temp. & time : 85+/-5°C , 1000 +/- 24hrs
9	Adhesive strength	1. No Serious mechanical damage under condition of 1005 : min 0.5kgf, 1608 : min 1.0kgf	
10	ESD	1. No mechanical damage after test 2. Leakage Current : ≤ 10uA * ESD gun (IEC61000-4-2 standard) * C=150pF R=330Ω	1. Contact discharge * Voltage : +/-8kV(Level 4) * Number : 10 times in 10sec
			2. Air discharge * Voltage : +/-15kV(Level 4) * Number : 10 times in 10sec

RUILONG.YUAN CO.,LTD
Tel: +86- 0755-82908296
Fax: +86- 0755-82908002

Email: jack@ruilon.com
Website: <http://www.ruilon.com>

RuiLongYuan Electronics are trademarks.

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. RUILONYUAN Electronics reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without expressed or written consent by an officer of RUILONYUAN Electronics, RUILONYUAN Electronics does not authorize the use of any of its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. RUILONYUAN Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. RUILONYUAN Electronics' only obligations are those in the RUILONYUAN Electronics Standard Terms and Conditions of Sale and in no case will RUILONYUAN Electronics be liable for any incidental, indirect, or consequential damages.