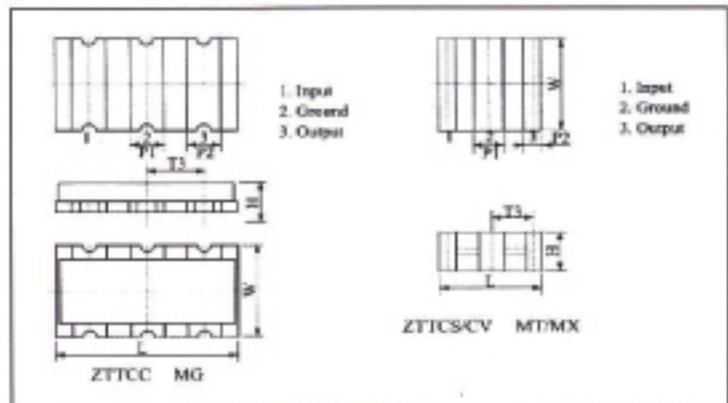
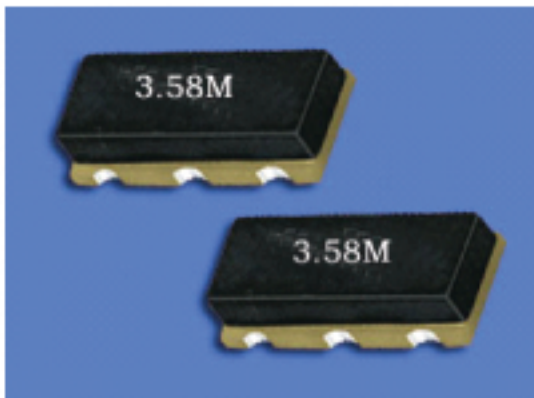


**ZTA Series**
**Electrical Specification 一般規格**

Type 型號		ZTACC/ZTTCC □ MG	ZTACS&ZTTCS/CV □ MT	ZTACS&ZTTCS/CV □ MX
Item 項目				
Frequency Range	頻率範圍	2.00~6.99	7.00~12.99	13.00~50.00
Frequency Tolerance(at 25℃)	調整頻差	±0.5%	±0.5%	±0.5%
Frequency Stability	溫度頻差	±0.3%	±0.4%	±0.4%
Resonant Resistance(Ω)	等效電阻	80Max	30Max	25Max
Operating Temperature Range	工作溫度	-20℃ to 80℃		
Aging For Ten Yesrs	老化率	±0.3%(Max.)		
Insulation Resistance	絕緣電阻	500MΩ DC/100V ±15V		

**Dimension (mm) 外觀尺寸**


Part Number	Dimensions								
	L	W	H	P1	P2	T1	T2	T3	W1
ZTA/ZTTC □ MG	7.4±0.3	3.4±0.3	1.8±0.3	1.2±0.3	1.2±0.3	1.5±0.3	1.7±0.3	2.5±0.3	3.0±0.3
ZTTCS □ MT/MX	4.7±0.3	4.1±0.2	1.6±0.3	1.0±0.4	0.8±0.4	1.3±0.2	0.8±0.2	1.9±0.2	5.1±0.2
ZTTCV □ MT/MX	3.7±0.2	3.1±0.2	1.2±0.3	0.9±0.3	0.7±0.3	1.0±0.2	0.7±0.2	1.5±0.2	4.1±0.2

**Test Circuit For Mos IC 測試電路用於 Mos IC**
