



- NO and NC in one casing**
- Separate adjustable temperatures**
- High switching capacity**
- Terminals easily accessible**
- Clip fixing**



Two thermostats in one casing:
 Thermostat (contact breaker, normally closed) for regulating heaters.
 Thermostat (contact maker, normally open) for regulating filter fans and heat exchangers or switching signal devices when temperature limit has been exceeded.

Heaters and cooling equipment can be switched independently from each other with a temperature offset as opposed to the usual change-over contacts.



Technical Data

Switch temperature difference	7K (± 4K tolerance)
Sensor element	thermostatic bimetal
Contact type	snap-action contact
Contact resistance	< 10mOhm
Service life	> 100,000 cycles
Max. Switching capacity	250VAC, 10 (2) A 120VAC, 15 (2) A DC 30W
EMC	acc. to EN 55014-1-2, EN 61000-3-2, EN 61000-3-3
Connection	4-pole terminal for 2.5mm ² , clamping torque 0.8Nm
Mounting	clip for 35mm DIN rail, EN50022
Casing	plastic according to UL94 V-0, light grey
Dimensions	67 x 50 x 46mm
Weight	approx. 90g
Fitting position	variable
Operating/Storage temperature	-20 to +80 °C (-4 to +176 °F) / -45 to +80 °C (-49 to +176 °F)
Protection type	IP20
Approvals	UL File No. E164102

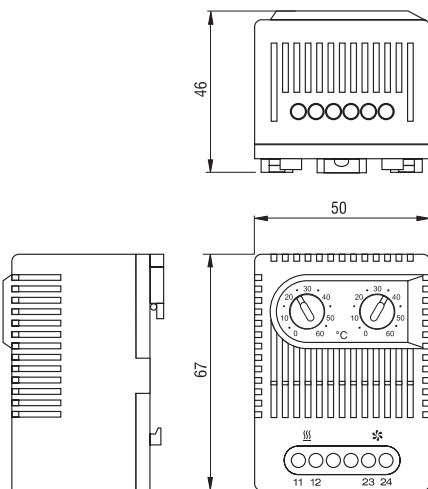

Load 1: Heater
 Load 2: Filter fan, Cooling equipment, Signal device

Art. No.	Setting Range		Setting Range	
	contact breaker, normally closed	0 to +60°C	contact maker, normally open	0 to +60°C
01172.0-00	contact breaker, normally closed	+32 to +140°F	contact maker, normally open	+32 to +140°F
01175.0-00	contact breaker, normally closed	-10 to +50°C	contact maker, normally open	+20 to +80°C
01175.0-01	contact breaker, normally closed	+14 to +122°F	contact maker, normally open	+68 to +176°F
01176.0-00*	contact maker, normally open	0 to +60°C	contact maker, normally open	0 to +60°C
01176.0-01*	contact maker, normally open	+32 to +140°F	contact maker, normally open	+32 to +140°F

*For regulating heat exchangers and fans (e.g. LE 019) and as an alarm contact for monitoring the interior temperature of electronic enclosures.