


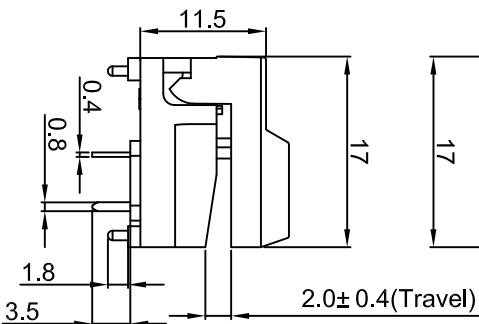


惠州宏利源电器有限公司

HONYONE ELECTRICAL APPLIANCE CO.,LTD



PB86

受控文件




SPECIFICATIONS

- Circuit : SPDT
- Current rating : 12mA
- Voltage rating : 24VDC
- Dielectric withstanding voltage : 250V/AC for 1 minute
- Contact resistance : 100mΩ Max. (Initial)
- Insulation resistance : 100MΩ Min.
- Operating force : 170± 50gf
- Travel : 2.0mm± 0.4mm
- Operating life : 50,000 cycles Min.
- Solder specifications : 260° C for 5 seconds
- Function : Momentary
- Operating temperature : +10° C ~ +60° C



Circuit Diagram



P.C.B. Layout

O	橘色
F	粉红色
C	洋红色
P	紫罗兰
A	灰色
B	黑色
W	白色
U	蓝色
G	绿色
Y	黄色
R	红色
上盖颜色 Y	
Cap color Y	

公差 TOLERANCES		.X±0.3		.XX±0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT		mm.	
版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2010.11.01	品名 TITLE	PB86-A0Y-NN	图号 DRAWING NO	PB86-A0Y-NN_CP_A0		
核准 APPROVED BY	Richard	核对 CHECKED BY	Sinc	绘图 DRAWN BY	Sinc						
版本 VER.	New Issue	变更说明 CHANGE DESCRIPTION		日期 DATE	2010.11.01	ECN NO.	N/A				