






深圳宏源开泰科技发展有限公司

R




Rating: 25A 125VAC (UL CUL)
 20A 250VAC (UL CUL VDE ENEC)
 Contact Resistance: 50m Ω (Max)
 Insulation Resistance: DC 500V 100M Ω (Min)
 Dielectric Strength: AC1500V 1 minute
 Electrical life: 10,000 cycles
 Operating Temperature: 0°C~85°C
 Safety Approval:

CUT-OUT

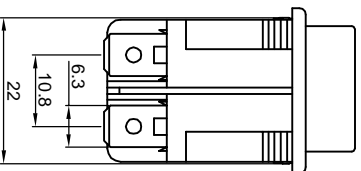

	X	Y
0.75~1.25	30.0+0.1	22.0+0.1
1.25~2.00	30.2+0.1	22.0+0.1
2.00~3.00	30.4+0.1	22.0+0.1



MATERIAL:

Body:Nylon66, UL rated:94V-2 min
 Actuator:Nylon66, UL rated:94V-2 min
 Terminal:Copper, Silver or Tin plated

公差 TOLERANCES		.X±0.3		.XX±0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT	
版本 VERSION		A0		NONE		日期 DATE		品名 TITLE	
核 准 APPROVED BY		Richard		Sinc		2011.11.25		R-210-C5L-BRBB	
核 对 CHECKED BY		Sinc		Sinc		Sinc		图 号 DRAWING NO	
核 对 CHECKED BY		Sinc		Sinc		Sinc		R-210-C5L-BRBB_A0	
版本 VER.	重新整理发行	日期 DATE	2011.11.25	ECN NO.	N/A	绘图 DATE	2011.11.25	品名 TITLE	R-210-C5L-BRBB
	变更说明 CHANGE DESCRIPTION					绘图 DATE		品名 TITLE	R-210-C5L-BRBB_A0

File Code: HY-WI-E-03A