



TS2

受控文件




SPECIFICATIONS

- Circuit :SPST
- Current rating :50mA
- Voltage rating :12VDC
- Dielectric withstanding voltage:250VAC for 1 minute
- Contact resistance :100mΩ Max. (initial)
- Insulation resistance :100MΩ Min.
- Operating force :180± 50gf
- Total travel :250± 50gf
- Operating life :0.25mm± 0.1mm
- Solder specifications :200,000 cycles Min
- Function :260° C for 5 seconds
- Operating temperature :Momentary
- :+10° C ~ +60° C





CIRCUIT

P.C.B. LAYOUT

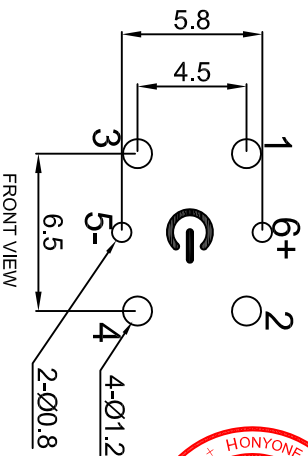

BG	纯绿色
W	白色
O	橙色
RU	蓝色
	红色
U	蓝色
G	黄绿色
Y	黄色
R	红色

灯发光颜色 X
Emitted color X

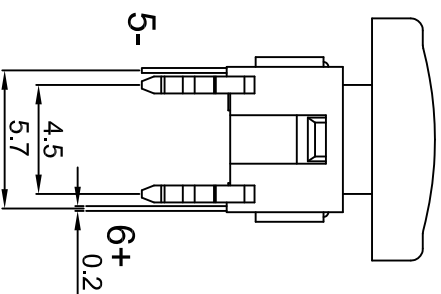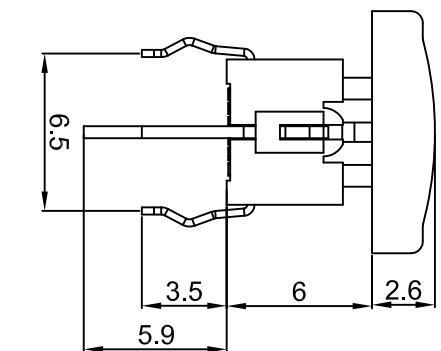

公差 TOLERANCES

.X±0.3 .XX±0.15

角度 ANGLE ±1°

单位 DIMENSION UNIT mm.

版本 VER.	New Issue	变更说明 CHANGE DESCRIPTION	日期 DATE	2010.11.01	ECN NO.	N/A	核准 APPROVED BY	Richard	核对 CHECKED BY	Sinc	绘图 DRAWN BY	Sinc	品名 TITLE	TS2-00-5AX-1D	图号 DRAWING NO	TS2-00-5AX-1D_CP_A0
公差 TOLERANCES	版本 VERSION	角度 ANGLE	日期 DATE	2010.11.01	ECN NO.	N/A	核准 APPROVED BY	Richard	核对 CHECKED BY	Sinc	绘图 DRAWN BY	Sinc	品名 TITLE	TS2-00-5AX-1D	图号 DRAWING NO	TS2-00-5AX-1D_CP_A0