


Pin Header
 Single Row / Dual Row
 Straight DIP Type / Straight S.M.T Type

Pitch:1.00mm

Series
 351
 355

WOXCONN

Http://www.woxconn.com








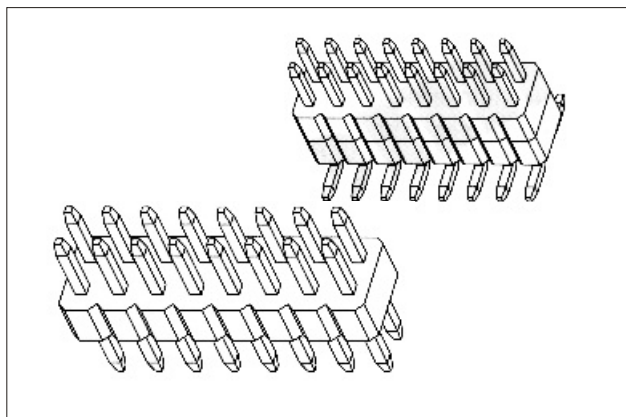


SPECIFICATIONS:

Current Rating: 1.0 AMP
 Contact Resistance: 30mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Voltage: 500VAC/minute
 Operation Temperature: -40°C to +105°C
 Max Process Temp: 230°C for 30~60 secretary.

MATERIALS:

Contact Material: Copper Alloy
 Contact Plating: Gold or Tin over 50μ" Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: LCP

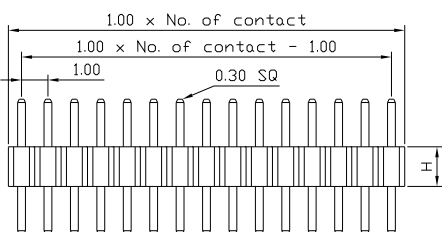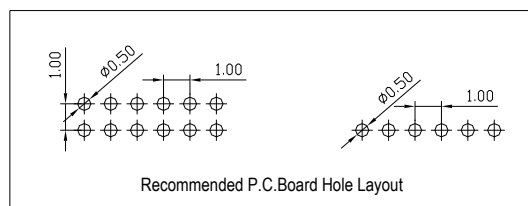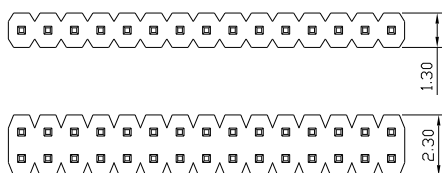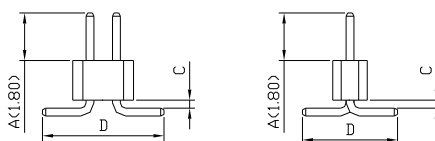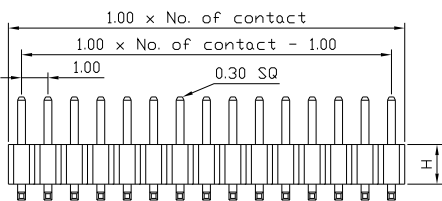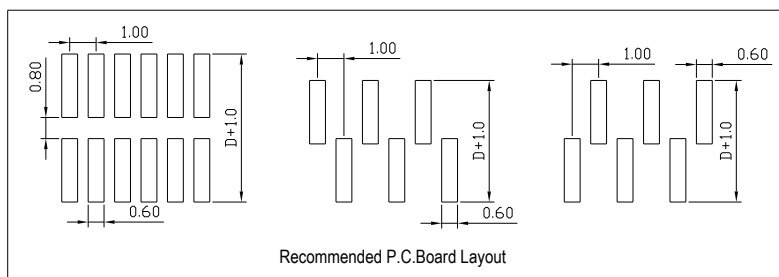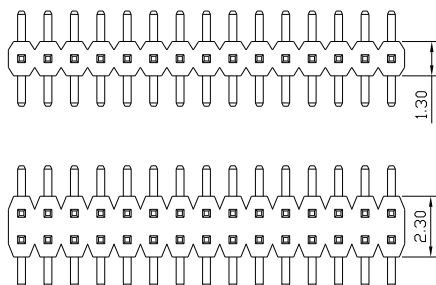

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
 3 5 2 2 XX M X X 1 XXX

① Series No.:
 3= Pin Header
 ② Pitch: 5= 1.00mm

③ Insulator Height:
 1 = 1.00mm
 5 = 1.50mm

④ Dip Spacing:
 1=Single row
 2=Double row
 ⑤ Number of Contacts:
 Single row =01 to 40
 Double row=02 to 80
 ⑥ Tail & Mounting Style:
 S=Straight DIP type
 M=Straight SMT type

⑦ Contact Plated
 0=Tin 1=Gold Flash
 2=Gold 3u" 3=Gold 5u"
 4=Gold 10u" 5=Gold 15u"
 6= Gold 30u"
 ⑧ Material Type
 0=PPS 3=Nylon-66
 1=PBT 4=Nylon-6T
 2=LCP 5=PA46

⑨ Tiers of Body
 1 = Single tier
 2 = Double tier
 3 = Triple tier
 ⑩ Pin Length
 XXX=A+H+C

Due to technical progress, all the information provided is subject to change without prior notice.