

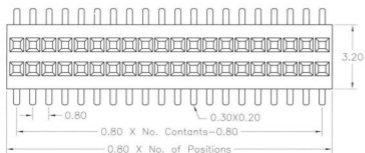


# 0.8\*1.2mm Female Header, Dual Row, S. M. T

## SPECIFICATIONS

Current Rating	: 0.75AMP
Operation Temperature	: -40° C to +105° C
Contact Resistance	: 30mΩ Max.
Insulation Resistance	: 1000MΩ Min.
Withstanding Voltage	: AC 500V
Insulator Material	: High Temperature Thermoplastic (UL94V-0)
Contact Material	: Phosphor Bronze
Contact plating	: Au over 50 u" Ni



## PCB LAYOUT

## Ordering Information

2 6 31 — 2      XX      M      G0      C      T      N      01

No. of Pins Per Row  
03~50

Contact Plating  
 G0 : Gold Flash  
 G2 : 5u" Gold  
 G3 : 10u" Gold  
 G4 : 15u" Gold  
 G5 : 30u" Gold  
 S0 : Gold Flash/Tin  
 Standard: G0

Material Type  
 C: Nylon-6T  
 D: LCP  
 E: Nylon-46