


HEDS-5700 Series

Panel Mount Optical Encoders



Data Sheet

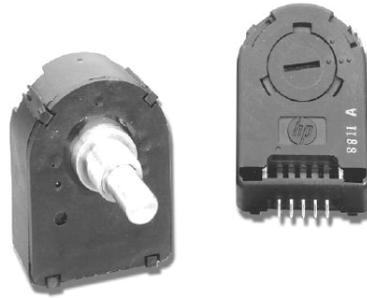

Description

The HEDS-5700 series is a family of low cost, high performance, optical incremental encoders with mounted shafts and bushings. The HEDS-5700 is available with tactile feedback for hand operated panel mount applications, or with a free spinning shaft for applications requiring a pre-assembled encoder for position sensing.


The encoder contains a collimated LED light source and special detector circuit which allows for high resolution, excellent encoding performance, long rotational life, and increased reliability. The unit outputs two digital waveforms which are 90 degrees out of phase to provide position and direction information. The HEDS-5740 Series provides a third Index Channel.

The HEDS-5700 is quickly and easily mounted to a front panel using the threaded bushing, or it can be directly coupled to a motor shaft (or gear train) for position sensing applications.

Features


- Two channel quadrature output with optional index pulse
- Available with or without static drag for manual or mechanized operation
- High resolution: up to 512 CPR
- Long rotational life: > 1 million revolutions
- -20 to 85° C operating temperature range
- TTL quadrature output
- Single 5 V supply
- Available with color coded leads

Package Dimensions

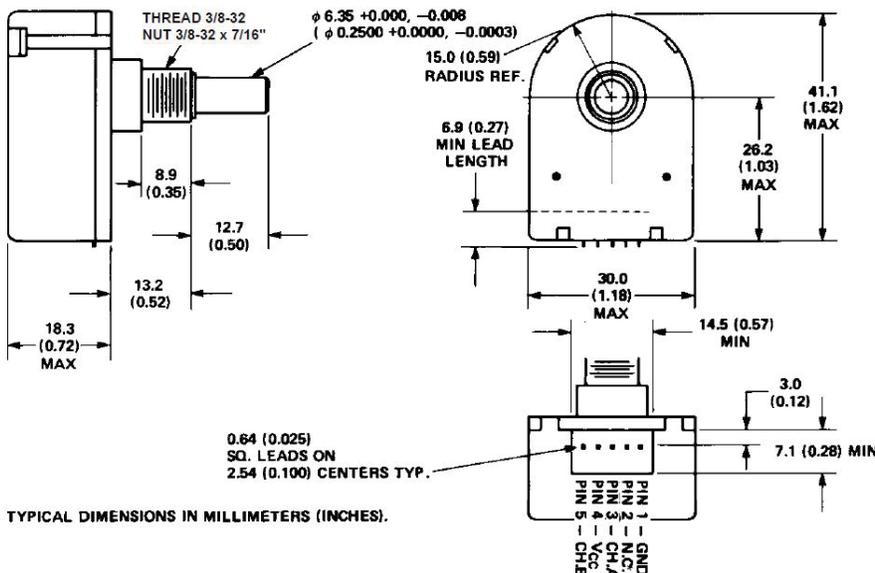

TYPICAL DIMENSIONS IN MILLIMETERS (INCHES).

SHAFT OPTIONS



Optional Wiring Color Code Table

Color	Output
White	A
Brown	B
Red	V _{CC}
Black	Gnd
Blue (Three Channel)	I

* Note: For the HEDS-5700, Pin #2 is a No Connect. For the HEDS-5740, Pin #2 is Channel I, the index output.

Applications

The HEDS-5700 with the static drag option is best suited for applications requiring digital information from a manually operated knob. Typical front panel applications include instruments, CAD/CAM systems, and audio/video control boards.

The HEDS-5700 without static drag (free spinning) is best suited for low speed, mechanized operations. Typical applications are copiers, X-Y tables, and assembly line equipment.

Note: Avago Technologies encoders are not recommended for use in safety critical applications. Eg. ABS braking systems, power steering, life support systems and critical care medical equipment. Please contact sales representative if more clarification is needed.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units	Notes
Storage Temperature	T _S	-40	+85	°C	
Operating Temperature	T _A	-20	+85	°C	
Vibration			20	g	20 Hz – 2 kHz
Supply Voltage	V _{CC}	-0.5	7	V	
Output Voltage	V _O	-0.5	V _{CC}	V	
Output Current per Channel	I _O	-1	5	mA	
Shaft Load – Axial			1	lb	
– Radial			1		

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Units	Notes
Temperature	T	-20	+85	°C	Noncondensing Atmosphere
Supply Voltage	V _{CC}	4.5	5.5	V	Ripple < 100 mV _{p-p}
Rotational Speed – Drag		300	RPM		
– Free Spinning		2000			

Electrical Characteristics Over Recommended Operating Range, Typical at 25° C

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes
Supply Current	I _{CC}		17	40	mA	Two Channel
			57	85		Three Channel
High Level Output Voltage	V _{OH}	2.4			V	I _{OH} = -40 μA Max.
Low Level Output Voltage	V _{OL}			0.4	V	I _{OL} = 3.2 mA


Note:

1. If more source current is required, use a 3.2 K pullup resistor on each output.

Mechanical Characteristics


Parameter	Min.	Typ.	Max.	Units	Notes
Starting Torque	- Static Drag		0.47	oz in	
	- Free Spinning		0.14		
Dynamic Drag	- Static Drag		1.1	oz in	100 RPM
	- Free Spinning		0.70		2000 RPM
Rotational Life	- Static Drag		1×10^6	Revolutions	1 lb Load
	- Free Spinning		12×10^6	Revolutions	4 oz Radial Load
Mounting Torque of Nut		13		lb in	

Output Waveforms

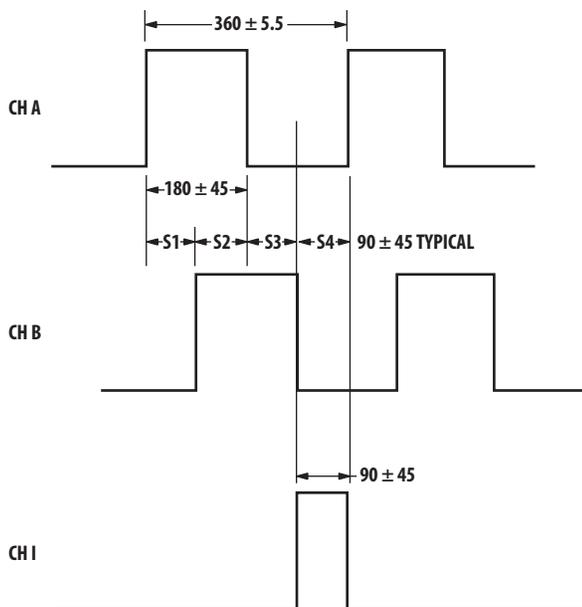

Notes:
 All values are in electrical degrees, where $360^\circ e = 1$ cycle of resolution.
 Errors are worst case over one revolution.
 Ch b leads ch a for counterclockwise rotation.
 Ch a leads ch b for clockwise rotation.

Ordering Information

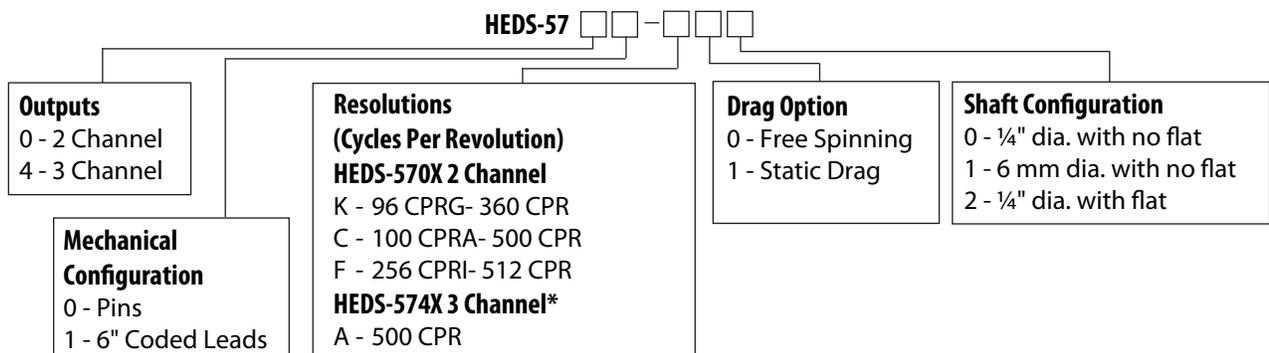

*Please contact factory for other resolutions.

		00	01	02	10	11	12
HEDS-5700#	A		*	*	*		
	C		*	*	*	*	
	F	*				*	*
	G	*					
	I	*	*	*	*		*
	K		*		*		
HEDS-5701#	A	*		*			*
	C				*		
	F	*	*		*	*	
	G	*					
	H		*				*
	I				*		
HEDS-5740#	A			*			

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2011 Avago Technologies. All rights reserved. Obsoletes 5988-5856EN AV02-3575EN - June 11, 2011

