

△数	訂正記号	担当者	年月日	承認者
△				
△				
△				




NOTES :

1. Housing material : Heat resistant plastic UL94V-0, Black
2. Terminal material : Copper Alloy
3. Terminal plated : Gold (Au flash) plating over all,
Nickel (Min 40μ ") under plating over all
4. Part No. : ASK7LXX10



Contacts No. 

Dimension table (mm)

Dimensions Number of contacts	A	B
20	6.70	3.6
24	7.50	4.4
30	8.70	5.6
40	10.7	7.6
50	12.7	9.6
60	14.7	11.6
70	16.7	13.6
80	18.7	15.6

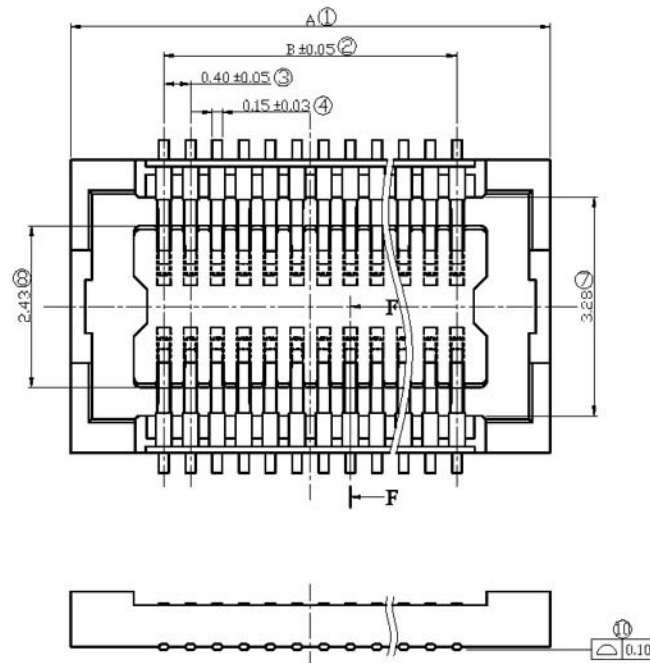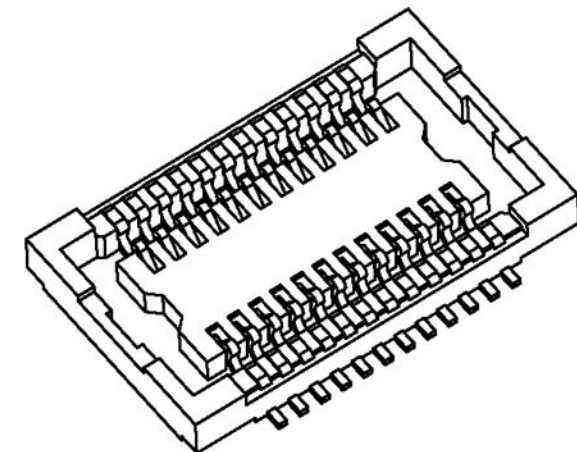

F-F cross section
Scale : X2

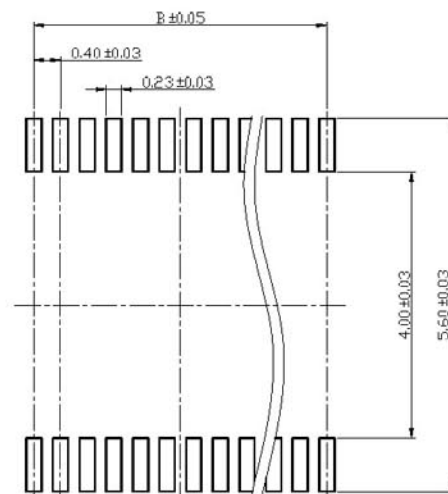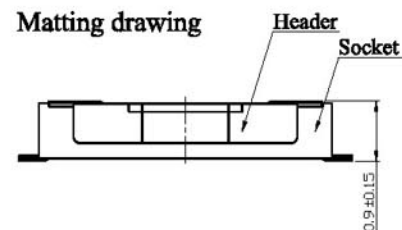

Recommended PC board pattern
(mounting pad layout)

ATC ASSEM TECHNOLOGY CO., LTD.			TITLE			0.4mm Pitch BOARD TO BOARD MATED HEIGHT 0.9mm SOCKET CONNECTOR	
DRAWING	JERRY	MATERIAL	Heat resistant plastic (94-V0)	P / N	ASK7 L * * 10	REV.	E
CHECKED	STING	DRAWING NO.	TOLERANCE UNLESS OTHER WISE SPEC.			DATE : 2011/6/20	
APPROVED	JACK	APPROVED		UNIT	mm	General tolerance: ±0.2	

ATC		TITLE	
ASSEM TECHNOLOGY CO., LTD.		0.4mm Pitch BOARD TO BOARD MATED HEIGHT 0.9mm HEADER CONNECTOR	
DRAWING	JERRY	MATERIAL	Heat resistant plastic (94-V0) P / N ASK L * * 10
CHECKED	STING	DRAWING NO.	
APPROVED	JACK	APPROVED	
		UNIT	mm
		TOLERANCE UNLESS OTHERWISE SPEC.	
		General tolerance: ±0.2	
		DATE	2011/4/25