

# EBK5/40 系列

## EBK5/40 Series

### 特点 Features

- 三相电源滤波器，电流 5 至 160A  
3-Phase EMI Power Line Filters 5 to 160A current ratings
- 新型端子台，接线简便，并附有安全外罩  
Typical Terminal Block Easy To Connection, With Safety Protection
- 漏电流低，具有高的共模和差模干扰抑制性能  
Small leakage Current, High Attenuation For Both Common and Differential Mode

### 应用 Applications

- 适用于强干扰设备，如变频调速系统，良好的性价比  
Suited for heavy interference equipments such as inverter speed controlled systems, high ratio of performance to cost make


### 技术参数 Technical Data

额定电压 Rated Voltage	275/480 VAC
工作频率 Operating Frequency	DC to 60Hz
耐压试验(一分钟) Test Voltage ( 1 Min)	1500 VDC (line/line) 2250 VDC (line/ground)
气候类别 Climatic Category	40/085/21




型号 Model DL-	端子方式 Terminal		额定电流 Rated Current (A)	接地电容量 Ground Capacitance (nF)	放电电阻 Discharge Resistance (MΩ)		外形尺寸 Dimensions fig.
	入 Input	出 Output			R1-3	R0	
5EBK5/40			5A	200	1.5	0.68	1
10EBK5/40			10A	200	1.5	0.68	1
16EBK5/40			16A	200	1.5	0.68	1
25EBK5/40			25A	200	1.5	0.68	2
35EBK5/40			35A	200	1.5	0.68	2
50EBK5/40			50A	320	1.5	0.68	2
65EBK5/40			65A	320	1.5	0.68	2
80EBK5/40			80A	320	1.5	0.68	3
100EBK5/40			100A	320	1.5	0.68	3
130EBK5/40			130A	690	1.5	0.68	3
160EBK5/40			160A	690	1.5	0.68	3



## 电原理图 Typical Circuit Diagram








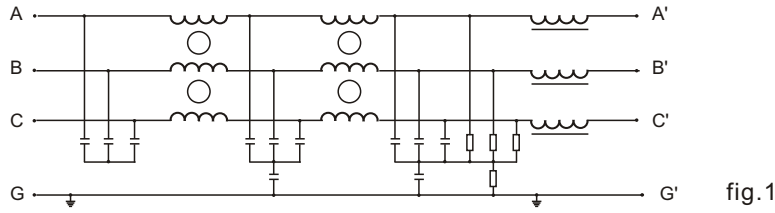


## 外形尺寸 Outline Drawing and Dimensions (mm)

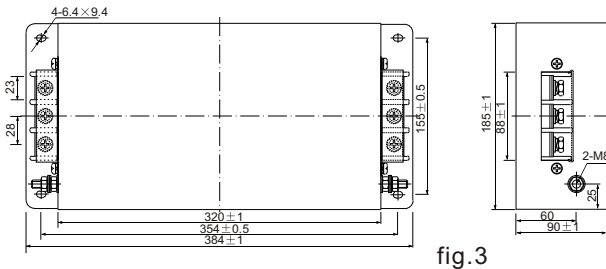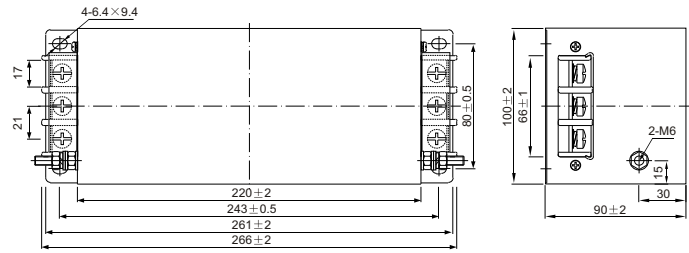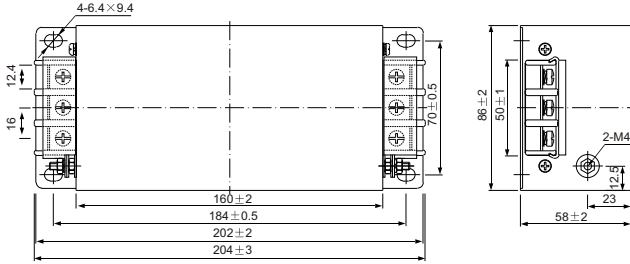

## 插入损耗 Insertion Loss in dB

(50 Ω 测量系统, IEC/CISPR No.17 号出版物 Measured in 50 Ω system, as IEC/CISPR No.17)

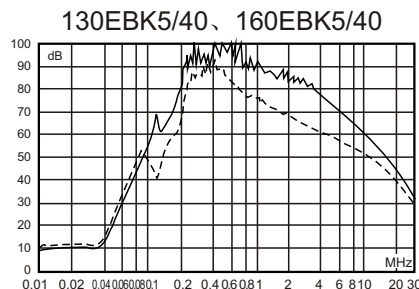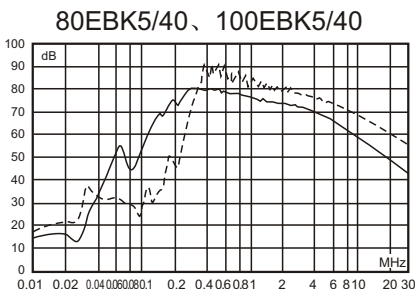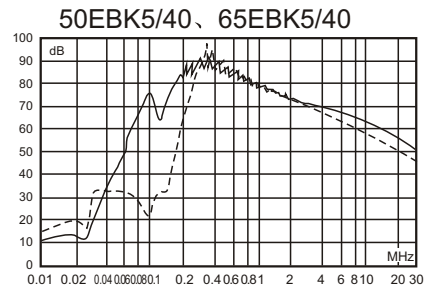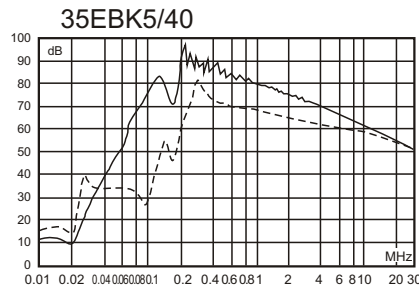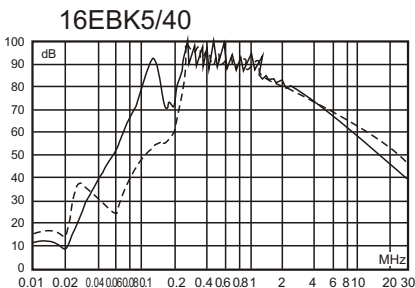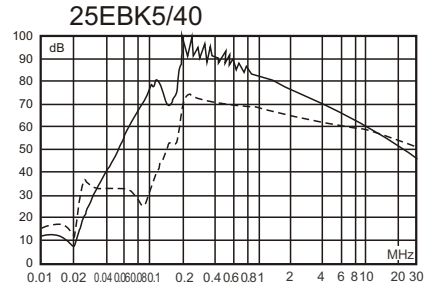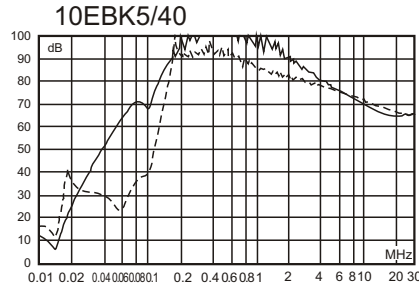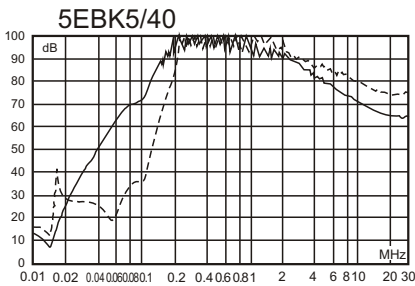

— 共模(Common Mode)  
 - - - 差模(Differential Mode)

