



B5G微型小通流容量系列 (B5G Mini Light-Duty Types)

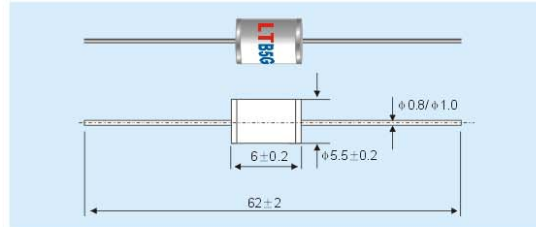

型号 Type	标称直流 击穿电压 DC Breakdown Voltage 100v/s	直流击穿 电压范围 Tolerance of Vs	冲击击穿电压 Impulse Spark-over Voltage 1kV/ μ s	绝缘阻抗 Insulation Resistance		耐冲击电流 Impulse Discharge Current 8/20 μ s	耐工频电流 Alternating Discharge Current 50Hz	电容 C 10kHz @0.3V
	V	%	V	G Ω	DC	KA	A	PF
B5G070L	70	25	≤ 600	≥ 10	25V	5	5	≤ 2
B5G090L	90	25	≤ 650	≥ 10	50V	5	5	≤ 2
B5G230L	230	20	≤ 700	≥ 10	100V	5	5	≤ 2
B5G350L	350	20	≤ 800	≥ 10	100V	5	5	≤ 2
B5G420L	420	20	≤ 900	≥ 10	100V	5	5	≤ 2
B5G470L	470	20	≤ 900	≥ 10	250V	5	5	≤ 2
B5G600L	600	20	≤ 1200	≥ 10	250V	5	5	≤ 2

B3D 5KA贴片三极管 (B3D 5KA Series SMD Arresters)

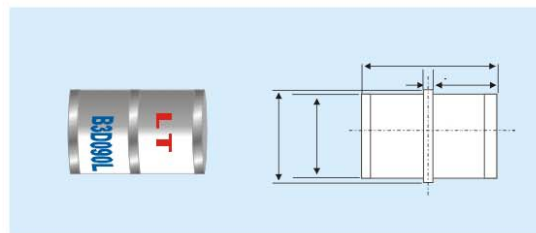

型号 Type	标称直流 击穿电压 DC Breakdown Voltage 100v/s	直流击穿 电压范围 Tolerance of Vs	冲击击穿电压 Impulse Spark-over Voltage 1kV/ μ s	绝缘阻抗 Insulation Resistance		耐冲击电流 Impulse Discharge Current 8/20 μ s	耐工频电流 Alternating Discharge Current 50Hz	电容 C 10kHz @0.3V
	V	%	V	G Ω	DC	KA	A	PF
B3D090L	90	25	≤ 700	≥ 10	50V	5	5	≤ 1.5
B3D150L	150	25	≤ 800	≥ 10	50V	5	5	≤ 1.5
B3D230L	230	25	≤ 800	≥ 10	100V	5	5	≤ 1.5
B3D350L	350	25	≤ 800	≥ 10	100V	5	5	≤ 1.5
B3D420L	420	25	≤ 900	≥ 10	250V	5	5	≤ 1.5