


陶瓷气体放电管 (GDT) >> [二极陶瓷放电管](#)

LT $\phi 5.5 \times 6$, 5KA

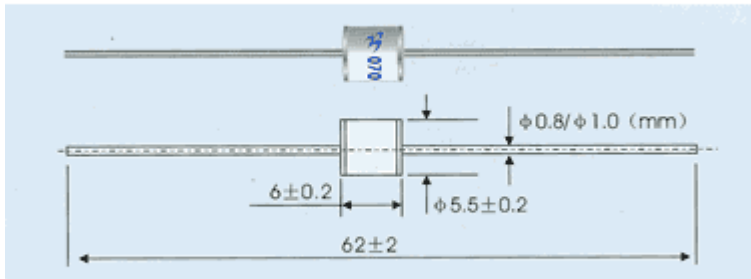

型号	标称直流 击穿电压 100V/s	直流击穿 电压范围	冲击 击穿电压 1kv/ μ s	绝缘 电阻 DC	耐 冲击电流 8/20 μ s	耐 工频电流 50Hz	电容 1kHz
	V	%	V	G Ω	kA	A	pF
LT-B5G070L	70	± 25	≤ 600	≥ 10	5	5	≤ 1
LT-B5G090L	90	± 25	≤ 700	≥ 10	5	5	≤ 1
LT-B5G150L	150	± 25	≤ 700	≥ 10	5	5	≤ 1
LT-B5G230L	230	± 20	≤ 800	≥ 10	5	5	≤ 1
LT-B5G250L	250	± 20	≤ 800	≥ 10	5	5	≤ 1
LT-B5G300L	300	± 20	≤ 800	≥ 10	5	5	≤ 1
LT-B5G350L	350	± 20	≤ 800	≥ 10	5	5	≤ 1
LT-B5G470L	470	± 20	≤ 900	≥ 10	5	5	≤ 1
LT-B5G600L	600	± 20	≤ 1200	≥ 10	5	5	≤ 1
LT-B5G800L	800	± 20	≤ 1400	≥ 10	5	5	≤ 1
LT-B5G1000L	1000	± 20	≤ 1600	≥ 10	5	5	≤ 1
LT-B5G1600L	1600	± 20	≤ 2600	≥ 10	5	5	≤ 1
LT-B5G2500L	2500	± 20	≤ 4000	≥ 10	5	5	≤ 1