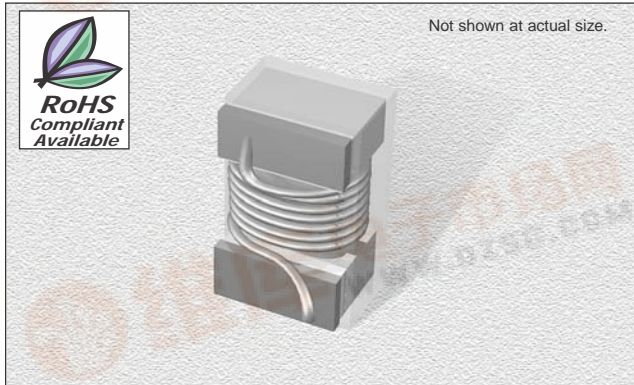


查询"CT1008LSC"供应商


## CT1008LSC Series

From .005  $\mu\text{H}$  to 100  $\mu\text{H}$ 

## CHARACTERISTICS

**Description:** SMD ferrite core wire-wound chip inductor**Applications:** LC resonant circuits such as oscillator and signal generators, impedance matching, circuit isolation, RF filters, disk drives and computer peripherals, audio and video equipment, TV, radio and telecommunication equipment**Operating Temperature:** -25°C to +85°C**Inductance Tolerance:**  $\pm 5\%$  &  $\pm 10\%$ **Testing:** Inductance and Q are tested on an HP4286A at specified frequency**Packaging:** Tape & Reel**Miscellaneous:** RoHS Compliant available.**Marking:** Parts are marked with color dots in nanoHenries.Example: 10 $\mu\text{H}$  = 10000nH  $\leftarrow$  marking would be Brown, Black, Orange(103).**Additional Information:** Additional electrical & physical information available upon request**Samples available. See website for ordering information.**

## PAD LAYOUT

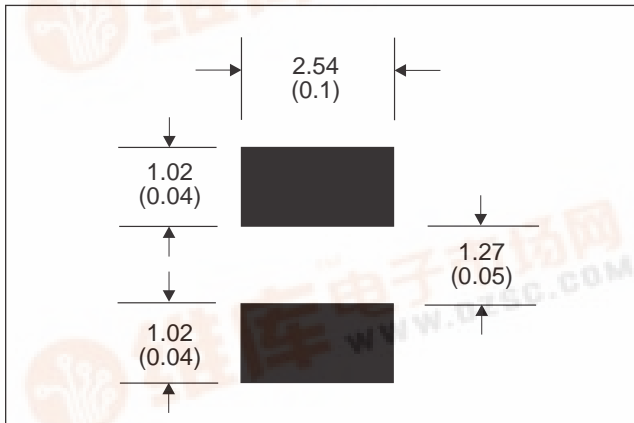

## SPECIFICATIONS

Please specify tolerance code when ordering.  
CT1008LSC-22N  $\leftarrow$  J =  $\pm 5\%$ , K =  $\pm 10\%$   
CT1008LSC Please specify "F" for RoHS compliant

Part Number	Inductance ( $\mu\text{H}$ )	L Test Freq. (MHz)	Q Fact. Min.	Q Test Freq. (MHz)	SRF Min. (MHz)	DCR Max. ( $\Omega$ )	Rated DC (mA)
CT1008LSC_-5N0K	.005	100	10	100	3000	.25	2000
CT1008LSC_-10NK	.010	100	10	100	2500	.25	1800
CT1008LSC_-12NK	.012	100	15	100	2400	.26	1700
CT1008LSC_-15NK	.015	100	15	100	2300	.28	1600
CT1008LSC_-18NK	.018	100	15	100	2200	.30	1550
CT1008LSC_-22N	.022	100	20	100	2100	.35	1500
CT1008LSC_-27N	.027	100	20	100	2000	.40	1450
CT1008LSC_-33N	.033	100	30	100	1600	.42	1400
CT1008LSC_-39N	.039	100	35	100	1500	.45	1350
CT1008LSC_-47N	.047	100	35	100	1400	.50	1300
CT1008LSC_-56N	.056	100	35	100	1300	.60	1250
CT1008LSC_-68N	.068	100	35	100	1200	.65	1240
CT1008LSC_-82N	.082	100	35	100	1100	.75	1230
CT1008LSC_-R10	.10	100	35	100	800	.80	1220
CT1008LSC_-R12	.12	25.2	30	25.2	700	.30	900
CT1008LSC_-R15	.15	25.2	30	25.2	550	.35	900
CT1008LSC_-R18	.18	25.2	30	25.2	500	.40	850
CT1008LSC_-R22	.22	25.2	30	25.2	450	.50	840
CT1008LSC_-R27	.27	25.2	30	25.2	425	.55	830
CT1008LSC_-R33	.33	25.2	30	25.2	400	.60	820
CT1008LSC_-R39	.39	25.2	30	25.2	375	.65	810
CT1008LSC_-R47	.47	25.2	30	25.2	350	.68	800
CT1008LSC_-R56	.56	25.2	30	25.2	325	.75	800
CT1008LSC_-R68	.68	25.2	30	25.2	300	.85	800
CT1008LSC_-R82	.82	25.2	30	25.2	260	1.0	800
CT1008LSC_-1R0	1.0	7.96	25	7.96	245	1.1	800
CT1008LSC_-1R2	1.2	7.96	25	7.96	230	1.2	790
CT1008LSC_-1R5	1.5	7.96	25	7.96	182	1.3	750
CT1008LSC_-1R8	1.8	7.96	25	7.96	135	1.5	750
CT1008LSC_-2R2	2.2	7.96	25	7.96	105	1.6	750
CT1008LSC_-2R7	2.7	7.96	25	7.96	70	1.7	740
CT1008LSC_-3R3	3.3	7.96	25	7.96	55	1.9	730
CT1008LSC_-3R9	3.9	7.96	25	7.96	48	2.1	700
CT1008LSC_-4R7	4.7	7.96	25	7.96	43	2.3	650
CT1008LSC_-5R6	5.6	7.96	20	7.96	42	2.5	640
CT1008LSC_-6R8	6.8	7.96	20	7.96	39	2.7	630
CT1008LSC_-8R2	8.2	7.96	20	7.96	36	3.1	600
CT1008LSC_-100	10	2.52	15	2.52	33	3.5	600
CT1008LSC_-120	12	2.52	15	2.52	30	3.8	550
CT1008LSC_-150	15	2.52	15	2.52	26	4.4	430
CT1008LSC_-180	18	2.52	15	2.52	24	4.8	400
CT1008LSC_-220	22	2.52	15	2.52	22	5.5	400
CT1008LSC_-270	27	2.52	15	2.52	21	6.3	360
CT1008LSC_-330	33	2.52	15	2.52	20	7.1	350
CT1008LSC_-390	39	2.52	10	2.52	18	9.5	330
CT1008LSC_-470	47	2.52	10	2.52	17	11.1	300
CT1008LSC_-560	56	2.52	10	2.52	16	12.1	270
CT1008LSC_-680	68	2.52	10	2.52	15	16.6	250
CT1008LSC_-820	82	2.52	10	2.52	13	19	200
CT1008LSC_-101	100	0.796	8	0.796	12	21	120

## PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F
mm	2.92	2.79	2.1	0.51	1.52	0.51
inches	0.113	0.108	0.081	0.019	0.059	0.019

08.09.05

Manufacturer of Inductors, Chokes, Coils, Beads, Transformers &amp; Toroids

800-684-5322 Inside US

949-453-1811 Outside US

Copyright © 2005 by CT Magnetics, DBA Central Technologies. All rights reserved.

CT Magnetics reserves the right to make improvements or change specifications without notice

