

## 1-Mbit (128K x 8) Static RAM

### Features

- Pin- and function-compatible with CY7C1019B
- High speed
  - $t_{AA} = 10 \text{ ns}$
- Low active power
  - $I_{CC} = 80 \text{ mA @ } 10 \text{ ns}$
- Low CMOS standby power
  - $I_{SB2} = 3 \text{ mA}$
- 2.0V Data retention
- Automatic power-down when deselected
- CMOS for optimum speed/power
- Center power/ground pinout
- Easy memory expansion with  $\overline{CE}$  and  $\overline{OE}$  options
- Functionally equivalent to CY7C1019B
- Available in Pb-free 32-pin 400-Mil wide Molded SOJ and 32-pin TSOP II packages

### Functional Description <sup>[1]</sup>


The CY7C1019D is a high-performance CMOS static RAM organized as 131,072 words by 8 bits. Easy memory expansion is provided by an active LOW Chip Enable ( $\overline{CE}$ ), an active LOW Output Enable ( $\overline{OE}$ ), and tri-state drivers. This device has an automatic power-down feature that significantly reduces power consumption when deselected. The eight input and output pins ( $IO_0$  through  $IO_7$ ) are placed in a high-impedance state when:

- Deselected ( $\overline{CE}$  HIGH)
- Outputs are disabled ( $\overline{OE}$  HIGH)
- When the write operation is active ( $\overline{CE}$  LOW, and  $\overline{WE}$  LOW).

Write to the device by taking Chip Enable ( $\overline{CE}$ ) and Write Enable ( $\overline{WE}$ ) inputs LOW. Data on the eight IO pins ( $IO_0$  through  $IO_7$ ) is then written into the location specified on the address pins ( $A_0$  through  $A_{16}$ ).

Read from the device by taking Chip Enable ( $\overline{CE}$ ) and Output Enable ( $\overline{OE}$ ) LOW while forcing Write Enable ( $\overline{WE}$ ) HIGH. Under these conditions, the contents of the memory location specified by the address pins appears on the IO pins.


### Logic Block Diagram

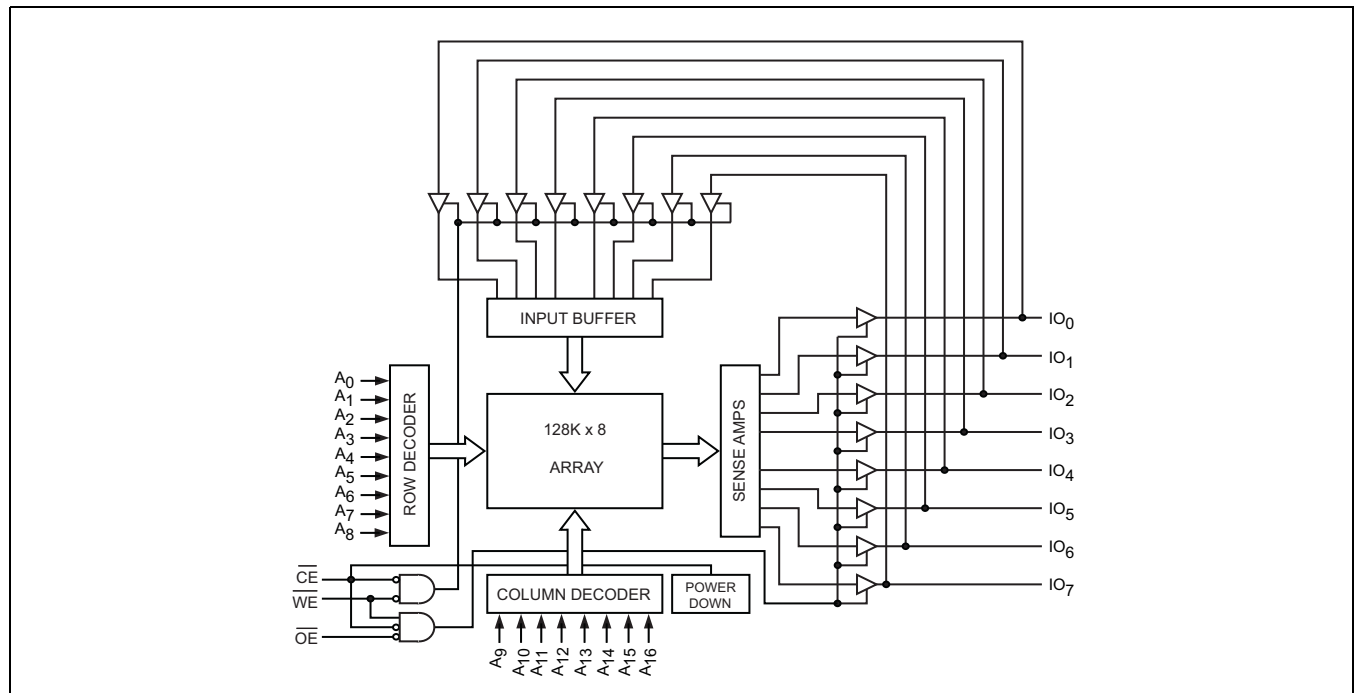

#### Note

1. For guidelines on SRAM system design, please refer to the 'System Design Guidelines' Cypress application note, available on the internet at [www.cypress.com](http://www.cypress.com).

## Pin Configuration

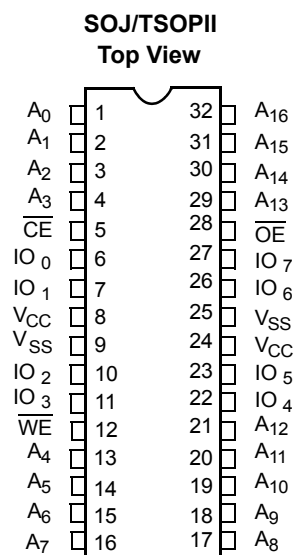

## Selection Guide

	<b>-10 (Industrial)</b>	<b>Unit</b>
Maximum Access Time	10	ns
Maximum Operating Current	80	mA
Maximum Standby Current	3	mA

## Maximum Ratings

Exceeding the maximum ratings may impair the useful life of the device. These user guidelines are not tested.

Storage Temperature ..... -65°C to +150°C

Ambient Temperature with  
Power Applied..... -55°C to +125°C  
Supply Voltage on  $V_{CC}$  to Relative GND <sup>[2]</sup> ... -0.5V to +6.0V

DC Voltage Applied to Outputs  
in High-Z State <sup>[2]</sup> ..... -0.5V to  $V_{CC} + 0.5V$

DC Input Voltage <sup>[2]</sup> ..... -0.5V to  $V_{CC} + 0.5V$

Current into Outputs (LOW) ..... 20 mA

Static Discharge Voltage..... > 2001V  
(per MIL-STD-883, Method 3015)

Latch-up Current ..... > 200 mA

## Operating Range

Range	Ambient Temperature	$V_{CC}$	Speed
Industrial	-40°C to +85°C	$5V \pm 0.5V$	10 ns

## Electrical Characteristics (Over the Operating Range)

Parameter	Description	Test Conditions	-10 (Industrial)		Unit
			Min	Max	
$V_{OH}$	Output HIGH Voltage	$I_{OH} = -4.0 \text{ mA}$	2.4		V
$V_{OL}$	Output LOW Voltage	$I_{OL} = 8.0 \text{ mA}$		0.4	V
$V_{IH}$	Input HIGH Voltage		2.2	$V_{CC} + 0.5$	V
$V_{IL}$	Input LOW Voltage <sup>[2]</sup>		-0.5	0.8	V
$I_{IX}$	Input Leakage Current	$GND \leq V_I \leq V_{CC}$	-1	+1	$\mu A$
$I_{OZ}$	Output Leakage Current	$GND \leq V_I \leq V_{CC}$ , Output Disabled	-1	+1	$\mu A$
$I_{CC}$	$V_{CC}$ Operating Supply Current	$V_{CC} = \text{Max},$ $I_{OUT} = 0 \text{ mA},$ $f = f_{max} = 1/t_{RC}$	100 MHz	80	mA
			83 MHz	72	mA
			66 MHz	58	mA
			40 MHz	37	mA
$I_{SB1}$	Automatic CE Power-Down Current—TTL Inputs	Max $V_{CC}$ , $\overline{CE} \geq V_{IH}$ $V_{IN} \geq V_{IH}$ or $V_{IN} \leq V_{IL}$ , $f = f_{max}$		10	mA
$I_{SB2}$	Automatic CE Power-Down Current—CMOS Inputs	Max $V_{CC}$ , $\overline{CE} \geq V_{CC} - 0.3V$ , $V_{IN} \geq V_{CC} - 0.3V$ , or $V_{IN} \leq 0.3V$ , $f = 0$		3	mA

### Note

2.  $V_{IL}(\text{min}) = -2.0V$  and  $V_{IH}(\text{max}) = V_{CC} + 1V$  for pulse durations of less than 5 ns.



### Capacitance <sup>[3]</sup>

Parameter	Description	Test Conditions	Max	Unit
C <sub>IN</sub>	Input Capacitance	T <sub>A</sub> = 25°C, f = 1 MHz, V <sub>CC</sub> = 5.0V	6	pF
C <sub>OUT</sub>	Output Capacitance		8	pF


### Thermal Resistance <sup>[3]</sup>

Parameter	Description	Test Conditions	400-Mil Wide SOJ	TSOP II	Unit
Θ <sub>JA</sub>	Thermal Resistance (Junction to Ambient)	Still Air, soldered on a 3 × 4.5 inch, four-layer printed circuit board	56.29	62.22	°C/W
Θ <sub>JC</sub>	Thermal Resistance (Junction to Case)		38.14	21.43	°C/W

### AC Test Loads and Waveforms <sup>[4]</sup>

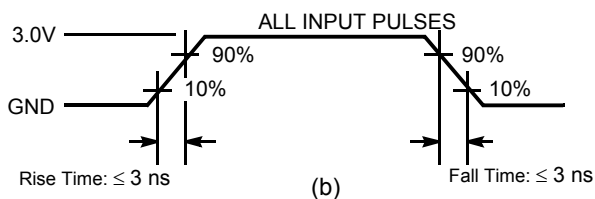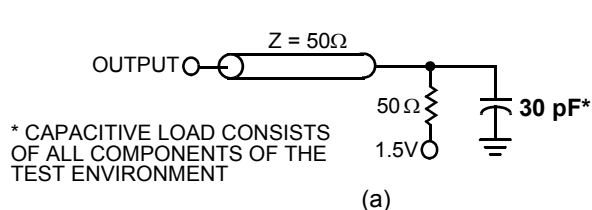

#### High-Z characteristics:

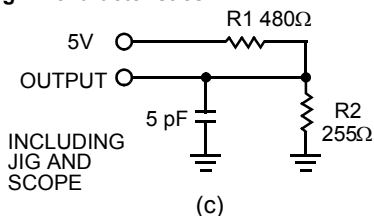

#### Notes

- Tested initially and after any design or process changes that may affect these parameters.
- AC characteristics (except High-Z) are tested using the load conditions shown in Figure (a). High-Z characteristics are tested for all speeds using the test load shown in Figure (c).

**Switching Characteristics** (Over the Operating Range) <sup>[5]</sup>

Parameter	Description	–10 (Industrial)		Unit
		Min	Max	
Read Cycle				
t <sub>power</sub> <sup>[6]</sup>	V <sub>CC</sub> (typical) to the first access	100		μs
t <sub>RC</sub>	Read Cycle Time	10		ns
t <sub>AA</sub>	Address to Data Valid		10	ns
t <sub>OHA</sub>	Data Hold from Address Change	3		ns
t <sub>ACE</sub>	$\overline{\text{CE}}$ LOW to Data Valid		10	ns
t <sub>DOE</sub>	$\overline{\text{OE}}$ LOW to Data Valid		5	ns
t <sub>LZOE</sub>	$\overline{\text{OE}}$ LOW to Low Z	0		ns
t <sub>HZOE</sub>	$\overline{\text{OE}}$ HIGH to High Z <sup>[7, 8]</sup>		5	ns
t <sub>LZCE</sub>	$\overline{\text{CE}}$ LOW to Low Z <sup>[8]</sup>	3		ns
t <sub>HZCE</sub>	$\overline{\text{CE}}$ HIGH to High Z <sup>[7, 8]</sup>		5	ns
t <sub>PU</sub> <sup>[9]</sup>	$\overline{\text{CE}}$ LOW to Power-Up	0		ns
t <sub>PD</sub> <sup>[9]</sup>	$\overline{\text{CE}}$ HIGH to Power-Down		10	ns
Write Cycle <sup>[10, 11]</sup>				
t <sub>WC</sub>	Write Cycle Time	10		ns
t <sub>SCE</sub>	$\overline{\text{CE}}$ LOW to Write End	7		ns
t <sub>AW</sub>	Address Set-Up to Write End	7		ns
t <sub>HA</sub>	Address Hold from Write End	0		ns
t <sub>SA</sub>	Address Set-Up to Write Start	0		ns
t <sub>PWE</sub>	$\overline{\text{WE}}$ Pulse Width	7		ns
t <sub>SD</sub>	Data Set-Up to Write End	6		ns
t <sub>HD</sub>	Data Hold from Write End	0		ns
t <sub>LZWE</sub>	$\overline{\text{WE}}$ HIGH to Low Z <sup>[8]</sup>	3		ns
t <sub>HZWE</sub>	$\overline{\text{WE}}$ LOW to High Z <sup>[7, 8]</sup>		5	ns


**Notes**

- Test conditions assume signal transition time of 3 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V, and output loading of the specified  $I_{\text{OL}}/I_{\text{OH}}$  and 30-pF load capacitance.
- $t_{\text{POWER}}$  gives the minimum amount of time that the power supply should be at typical  $V_{\text{CC}}$  values until the first memory access can be performed.
- $t_{\text{HZOE}}$ ,  $t_{\text{HZCE}}$ , and  $t_{\text{HZWE}}$  are specified with a load capacitance of 5 pF as in (c) of "AC Test Loads and Waveforms <sup>[4]</sup>" on page 4. Transition is measured when the outputs enter a high impedance state.
- At any given temperature and voltage condition,  $t_{\text{HZCE}}$  is less than  $t_{\text{LZCE}}$ ,  $t_{\text{HZOE}}$  is less than  $t_{\text{LZOE}}$ , and  $t_{\text{HZWE}}$  is less than  $t_{\text{LZWE}}$  for any given device.
- This parameter is guaranteed by design and is not tested.
- The internal write time of the memory is defined by the overlap of  $\overline{\text{CE}}$  LOW and  $\overline{\text{WE}}$  LOW.  $\overline{\text{CE}}$  and  $\overline{\text{WE}}$  must be LOW to initiate a write, and the transition of any of these signals can terminate the write. The input data set-up and hold timing should be referenced to the leading edge of the signal that terminates the write.
- The minimum write cycle time for Write Cycle no. 3 ( $\overline{\text{WE}}$  controlled,  $\overline{\text{OE}}$  LOW) is the sum of  $t_{\text{HZWE}}$  and  $t_{\text{SD}}$ .

### Data Retention Characteristics (Over the Operating Range)


Parameter	Description	Conditions	Min	Max	Unit
$V_{DR}$	$V_{CC}$ for Data Retention		2.0		V
$I_{CCDR}$	Data Retention Current	$V_{CC} = V_{DR} = 2.0V$ , $\overline{CE} \geq V_{CC} - 0.3V$ , $V_{IN} \geq V_{CC} - 0.3V$ or $V_{IN} \leq 0.3V$		3	mA
$t_{CDR}^{[3]}$	Chip Deselect to Data Retention Time		0		ns
$t_R^{[12]}$	Operation Recovery Time		$t_{RC}$		ns

### Data Retention Waveform

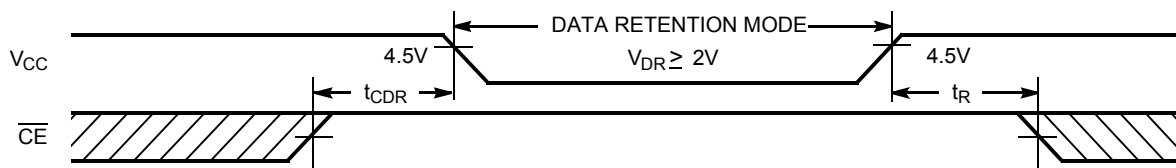


### Switching Waveforms

#### Read Cycle No. 1 (Address Transition Controlled) [13, 14]

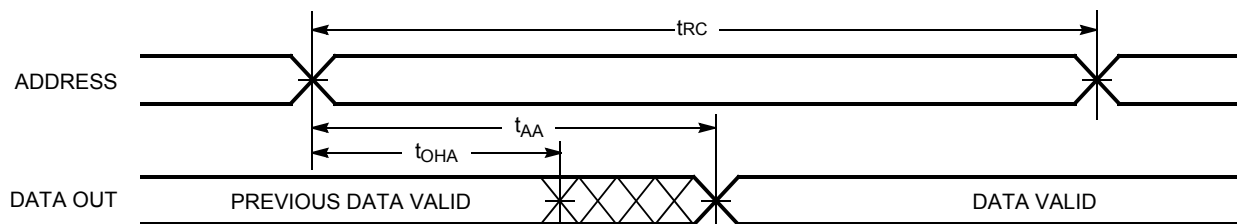



#### Read Cycle No. 2 ( $\overline{OE}$ Controlled) [14, 15]

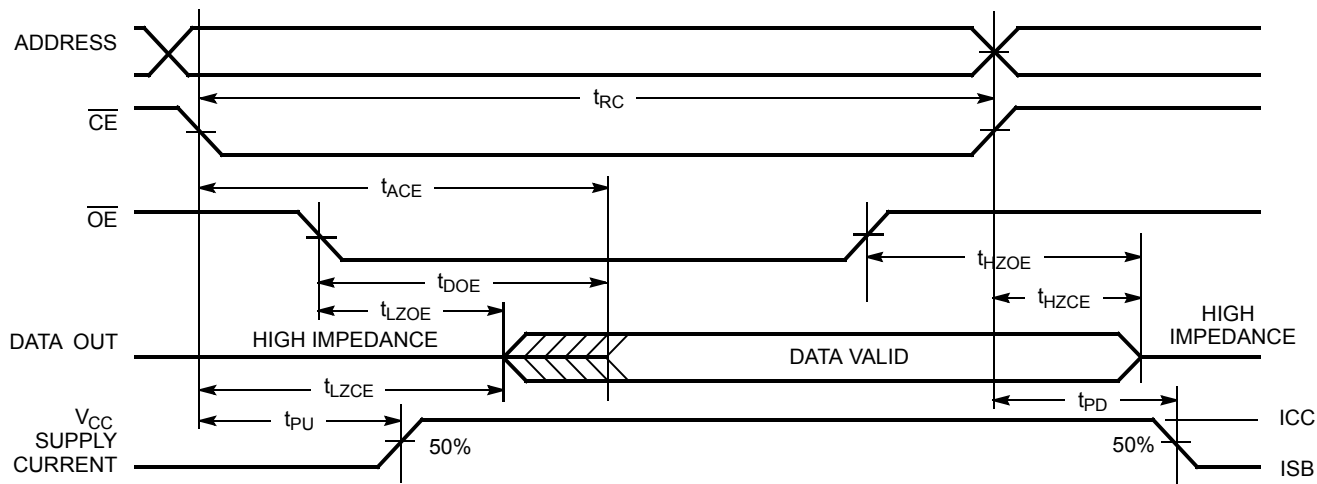

#### Notes

12. Full device operation requires linear  $V_{CC}$  ramp from  $V_{DR}$  to  $V_{CC(min)}$   $\geq 50 \mu s$  or stable at  $V_{CC(min)}$   $\geq 50 \mu s$ .
13. Device is continuously selected.  $\overline{OE}$ ,  $\overline{CE} = V_{IL}$ .
14.  $\overline{WE}$  is HIGH for Read cycle.
15. Address valid prior to or coincident with  $\overline{CE}$  transition LOW.


**Switching Waveforms** (continued)

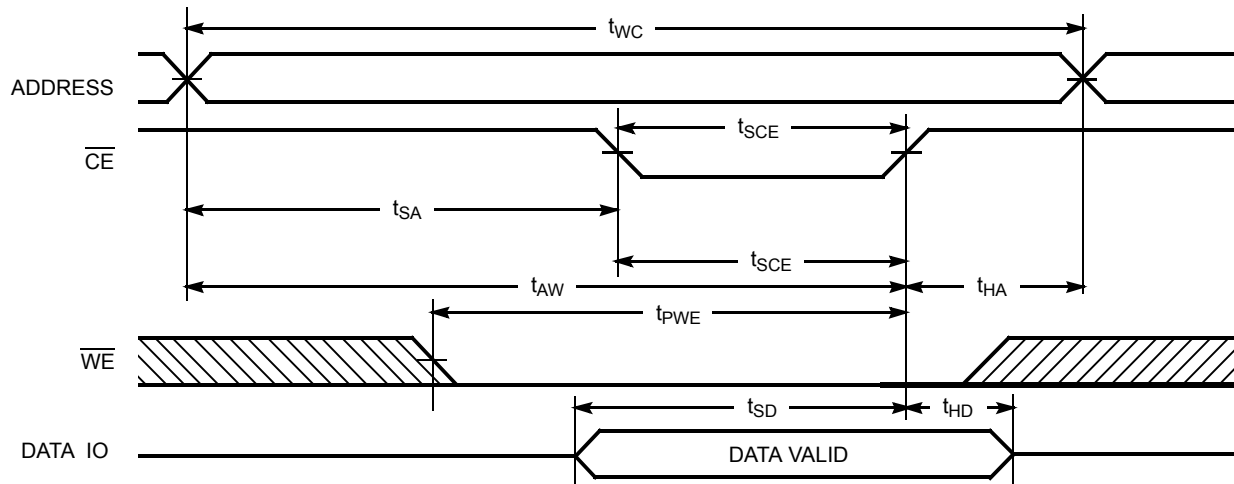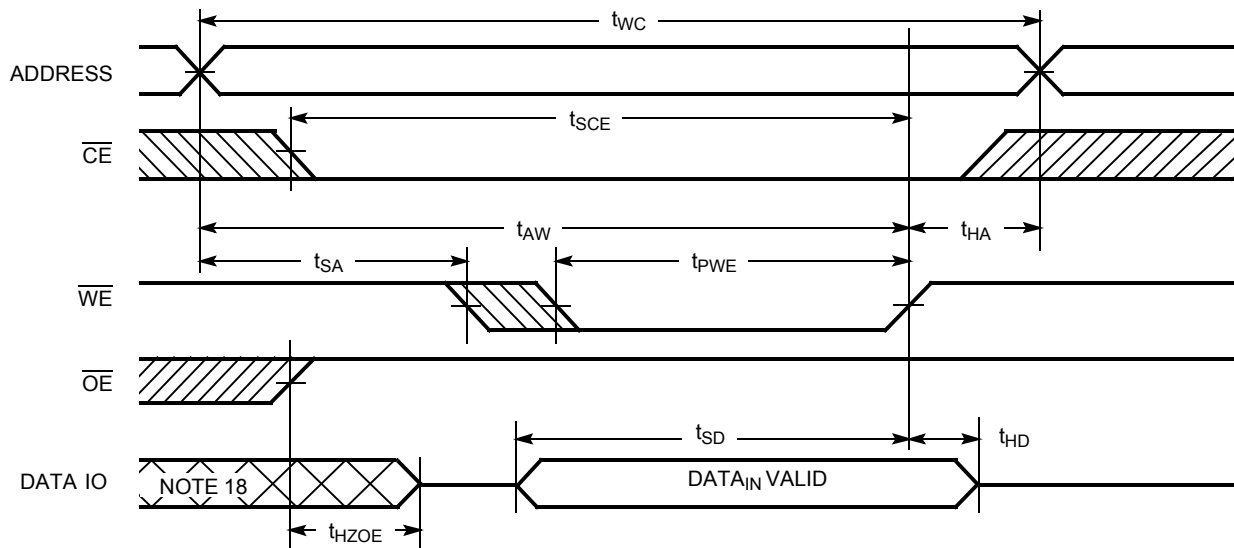**Write Cycle No. 1** ( $\overline{\text{CE}}$  Controlled) [16, 17]

**Write Cycle No. 2** ( $\overline{\text{WE}}$  Controlled,  $\overline{\text{OE}}$  HIGH During Write) [16, 17]

**Notes**

16. Data IO is high impedance if  $\overline{\text{OE}} = V_{\text{IH}}$ .
17. If  $\overline{\text{CE}}$  goes HIGH simultaneously with  $\overline{\text{WE}}$  going HIGH, the output remains in a high-impedance state.
18. During this period the IOs are in the output state and input signals should not be applied.
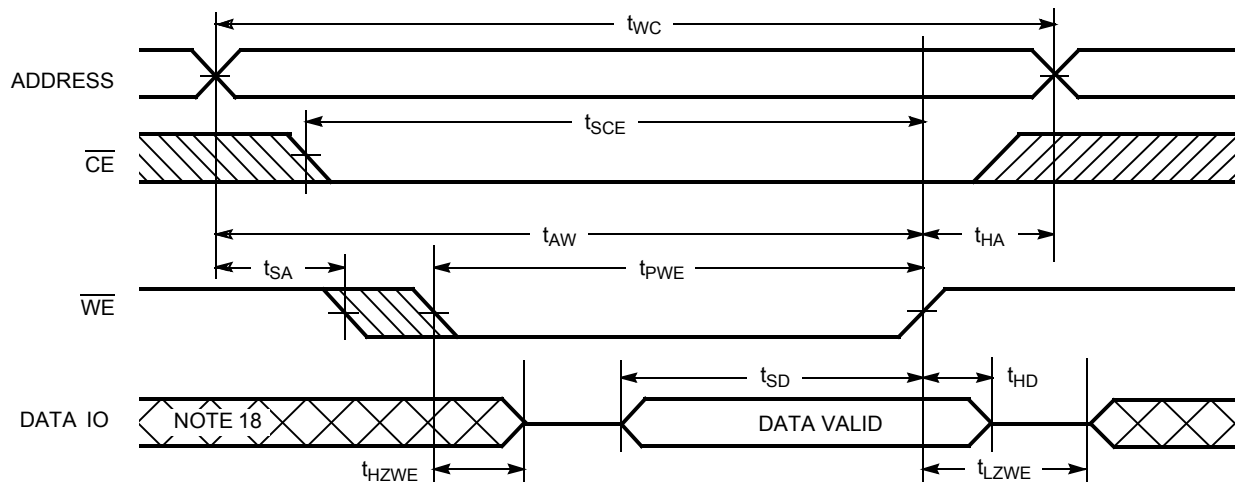
## Switching Waveforms (continued)

Write Cycle No. 3 ( $\overline{\text{WE}}$  Controlled,  $\overline{\text{OE}}$  LOW) [11, 17]



## Truth Table

$\overline{\text{CE}}$	$\overline{\text{OE}}$	$\overline{\text{WE}}$	$\text{IO}_0\text{--IO}_7$	Mode	Power
H	X	X	High Z	Power-Down	Standby ( $I_{\text{SB}}$ )
L	L	H	Data Out	Read	Active ( $I_{\text{CC}}$ )
L	X	L	Data In	Write	Active ( $I_{\text{CC}}$ )
L	H	H	High Z	Selected, Outputs Disabled	Active ( $I_{\text{CC}}$ )




## Ordering Information

Speed (ns)	Ordering Code	Package Diagram	Package Type	Operating Range
10	CY7C1019D-10VXI	51-85033	32-pin (400-Mil) Molded SOJ (Pb-free)	Industrial
	CY7C1019D-10ZSXI	51-85095	32-pin TSOP Type II (Pb-free)	

## Ordering Code Definitions


CY 7 C 1 01 9 D - 10 XXX I

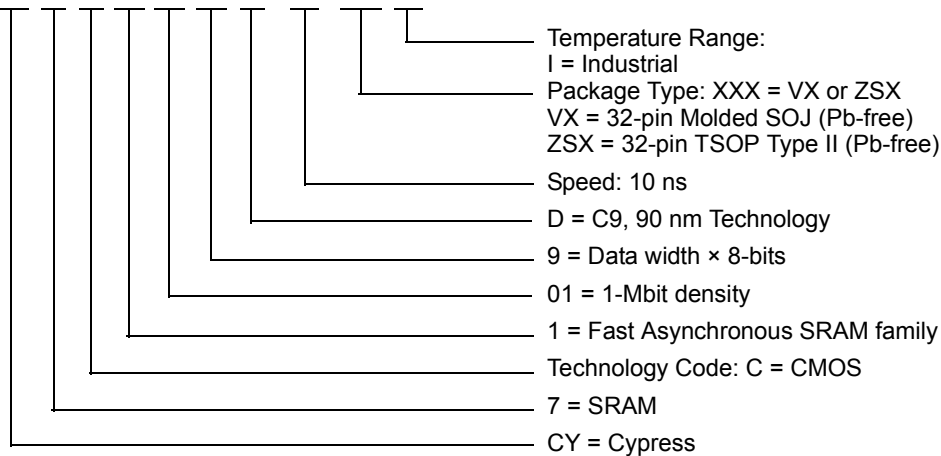

Please contact your local Cypress sales representative for availability of these parts.

## Package Diagrams


Figure 1. 32-pin (400-Mil) Molded SOJ (51-85033)

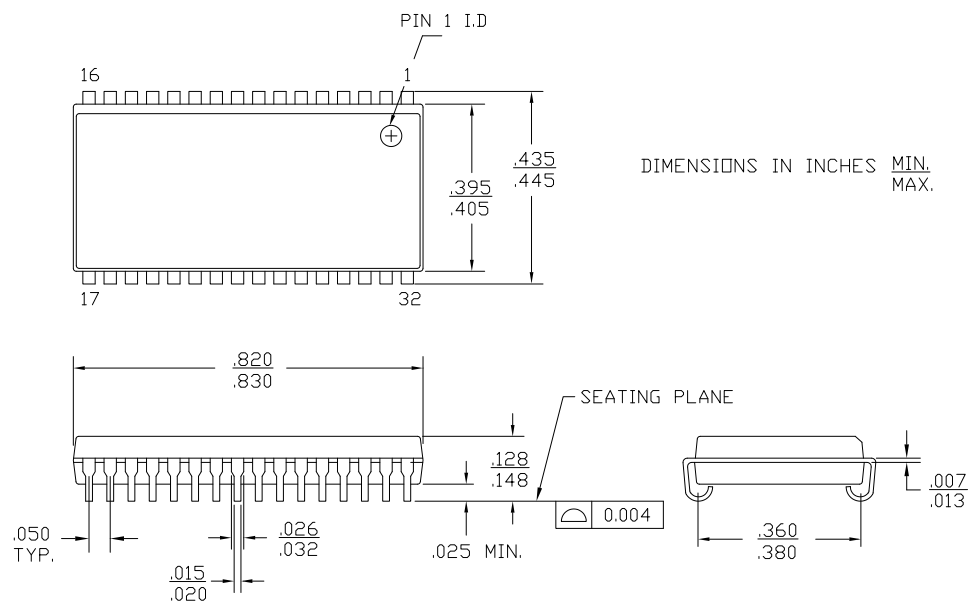

51-85033 °C

**Package Diagrams** (continued)

**Figure 2. 32-pin Thin Small Outline Package Type II (51-85095)**

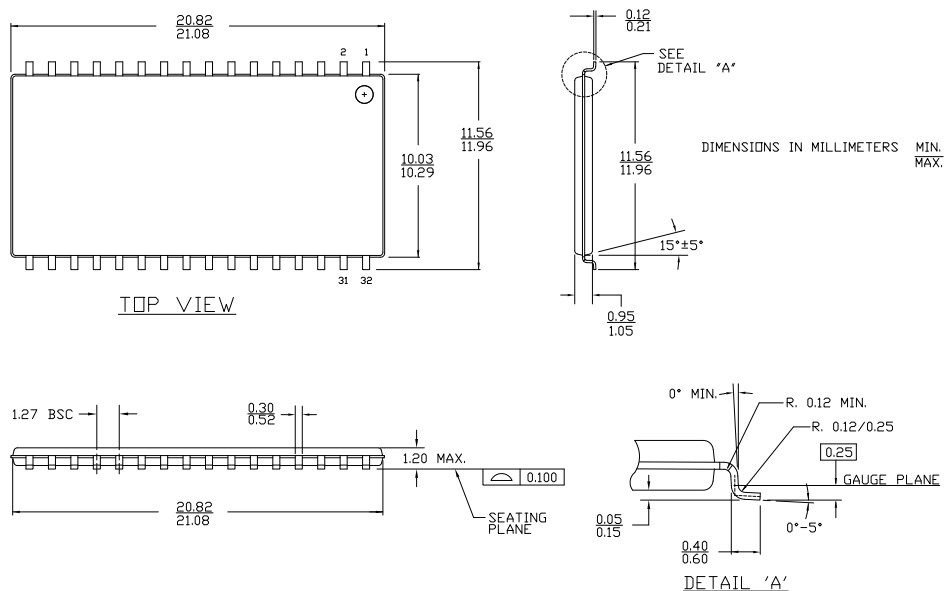

51-85095 \*A

All product or company names mentioned in this document may be the trademarks of their respective holders.

## Document History Page

Document Title: CY7C1019D, 1-Mbit (128K x 8) Static RAM Document Number: 38-05464				
REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	201560	See ECN	SWI	Advance Information data sheet for C9 IPP
*A	233715	See ECN	RKF	DC parameters are modified as per EROS (Spec # 01-2165) Pb-free offering in the Ordering Information
*B	262950	See ECN	RKF	Added T <sub>power</sub> Spec in Switching Characteristics table Added Data Retention Characteristics table and waveforms Shaded Ordering Information
*C	307598	See ECN	RKF	Reduced Speed bins to -10 and -12 ns
*D	520647	See ECN	VKN	Converted from Preliminary to Final Removed Commercial Operating range Removed 12 ns speed bin Added I <sub>CC</sub> values for the frequencies 83MHz, 66MHz and 40MHz Updated Thermal Resistance table Updated Ordering Information Table Changed Overshoot spec from V <sub>CC</sub> +2V to V <sub>CC</sub> +1V in footnote #2
*E	802877	See ECN	VKN	Changed I <sub>CC</sub> spec from 60 mA to 80 mA for 100MHz, 55 mA to 72 mA for 83MHz, 45 mA to 58 mA for 66MHz, 30 mA to 37 mA for 40MHz
*F	3110052	12/14/2010	AJU	Added Ordering Code Definitions. Updated Package Diagrams.

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [cypress.com/sales](http://cypress.com/sales).

### Products

<a href="#">Automotive</a>	<a href="http://cypress.com/go/automotive">cypress.com/go/automotive</a>
<a href="#">Clocks &amp; Buffers</a>	<a href="http://cypress.com/go/clocks">cypress.com/go/clocks</a>
<a href="#">Interface</a>	<a href="http://cypress.com/go/interface">cypress.com/go/interface</a>
<a href="#">Lighting &amp; Power Control</a>	<a href="http://cypress.com/go/powerpsoc">cypress.com/go/powerpsoc</a> <a href="http://cypress.com/go/plc">cypress.com/go/plc</a>
<a href="#">Memory</a>	<a href="http://cypress.com/go/memory">cypress.com/go/memory</a>
<a href="#">Optical &amp; Image Sensing</a>	<a href="http://cypress.com/go/image">cypress.com/go/image</a>
<a href="#">PSoC</a>	<a href="http://cypress.com/go/psoc">cypress.com/go/psoc</a>
<a href="#">Touch Sensing</a>	<a href="http://cypress.com/go/touch">cypress.com/go/touch</a>
<a href="#">USB Controllers</a>	<a href="http://cypress.com/go/USB">cypress.com/go/USB</a>
<a href="#">Wireless/RF</a>	<a href="http://cypress.com/go/wireless">cypress.com/go/wireless</a>

### PSoC Solutions

[psoc.cypress.com/solutions](http://psoc.cypress.com/solutions)  
[PSoC 1](#) | [PSoC 3](#) | [PSoC 5](#)