






# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

## For Use with Transceivers Requiring 1:1 Transmit and Receive Turns Ratios

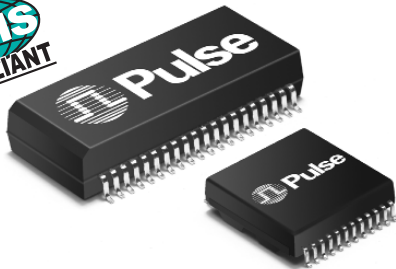

-  RoHS-5 peak reflow temperature rating 235°C
-  RoHS-6 peak reflow temperature rating 245°C
-  Meets IEEE 802.3 specification
-  Some models offer AutoMDIX capability


### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS-5 <sup>4</sup> Compliant Part Number	RoHS-6 <sup>5</sup> Compliant Part Number	Insertion Loss (dB TYP)	Return Loss (dB MIN)					Crosstalk (dB TYP)				Differential to Common Mode Rejection (dB TYP)	
			0.1-100MHz	2-30MHz	40MHz	50MHz	60-80MHz	1MHz	30MHz	60MHz	100MHz	1-60MHz	60-200MHz
H1026	—	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-40	-30
H1027	H1027NL <sup>6d</sup>	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-53	-40
H1028	H1028NL <sup>6d</sup>	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-45	-35
H1049	H1049 NL <sup>6d</sup>	-0.5		-21	-17	-14.5	-12	-65	-55	-45	-35	-45	-35
H1114	H1114 NL <sup>6d</sup>	-1.2		-16	-14	-13	-12	-50	-45	-40	-35	-37	-33
H1200	H1200NL <sup>6d</sup>	-1.0		-16	-14.4	-13	-12	-50	-45	-40	-35	-37	-33
H1174	H1174 NL <sup>6a</sup>	-1.2		-18	-16	-14	-12	-60	-45	-40	-35	-45	-35
H1270 <sup>2</sup>	H1270NL <sup>2, 6a</sup>	-1.2		-18	-16	-14	-12	-60	-45	-40	-35	-45	-35
HX1294 <sup>3</sup>	HX1294NL <sup>3, 6c</sup>	-1.2		-16	-14	-13.5	-10	-55	-45	-40	-35	-30	-20

1. All models meet input/output breakdown (Hipot) of 1500 Vrms.
2. Suitable for AutoMDIX applications.
3. Operating Temperature -40°C to +85°C.
4. RoHS-5: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive (product contains lead in applications considered solder).
5. RoHS-6: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive. Some internal connections may contain lead in high-temperature solder (solder alloys containing more than 85% lead).
6. MSL= Moisture Sensitivity Level a=1 b=2 c=3 d=4.

## Mechanicals


### H1XXX

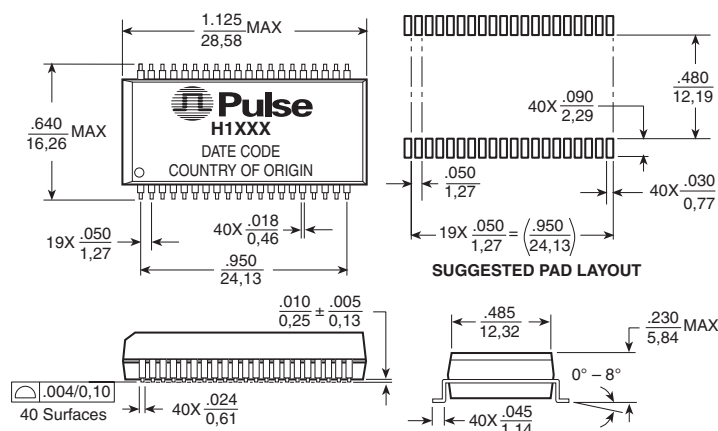

Dimensions: Inches  
mm

Unless otherwise specified, all tolerances are ± .010 / 0.25

### H1174/H1270

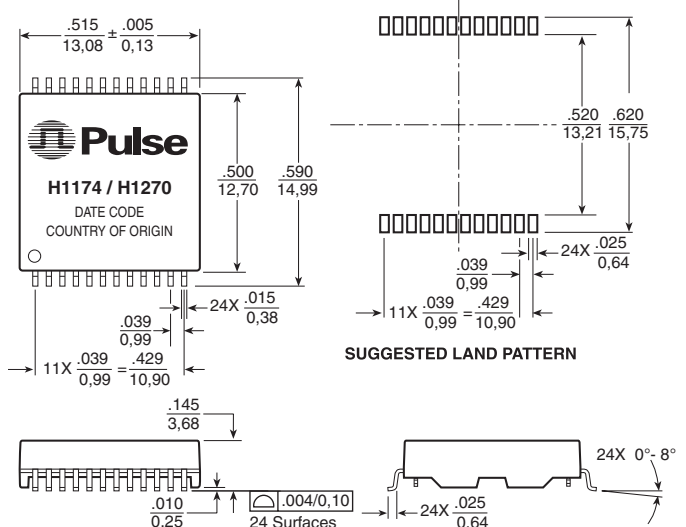




# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

## For Use with Transceivers Requiring 1:1 Transmit and Receive Turns Ratios



### Mechanicals (continued)

#### HX1294

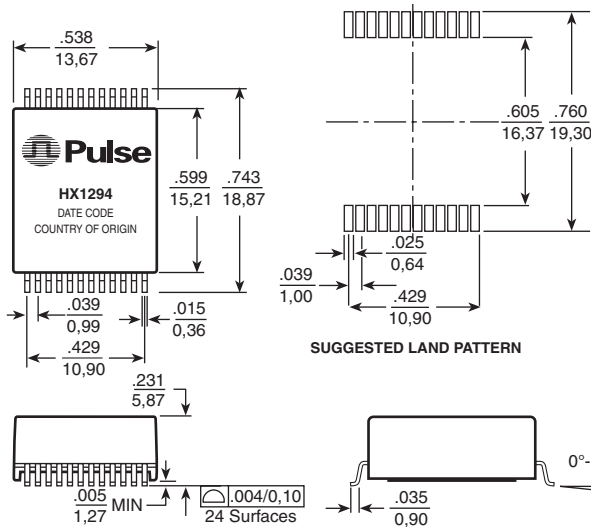

Dimensions: Inches  
mm

Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25


Weight .....1.6 grams

Tape & Reel .....300/reel

Tube .....35/tube


### Schematics

#### H1026, H1114

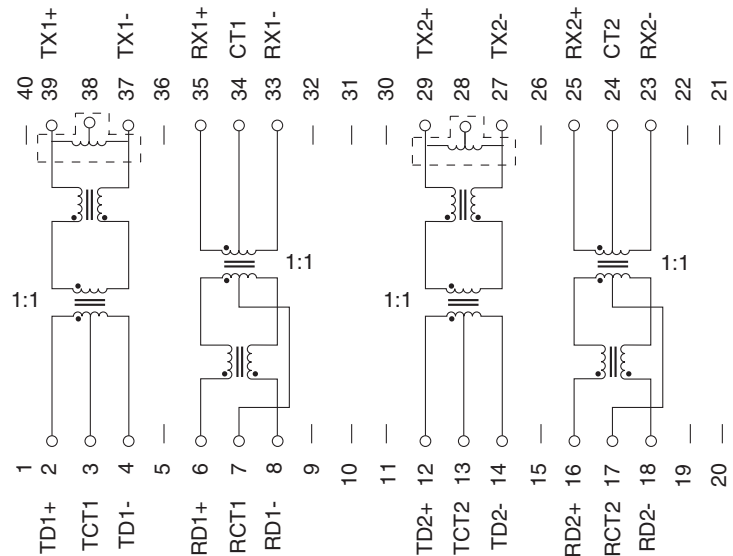


### Schematics (continued)

#### H1049

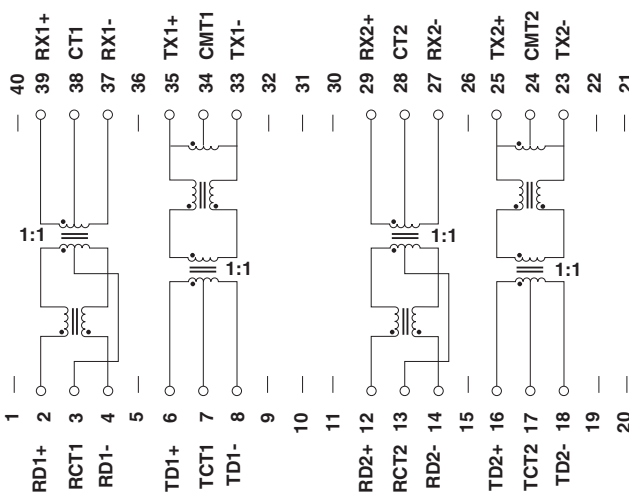

#### H1027, H1028

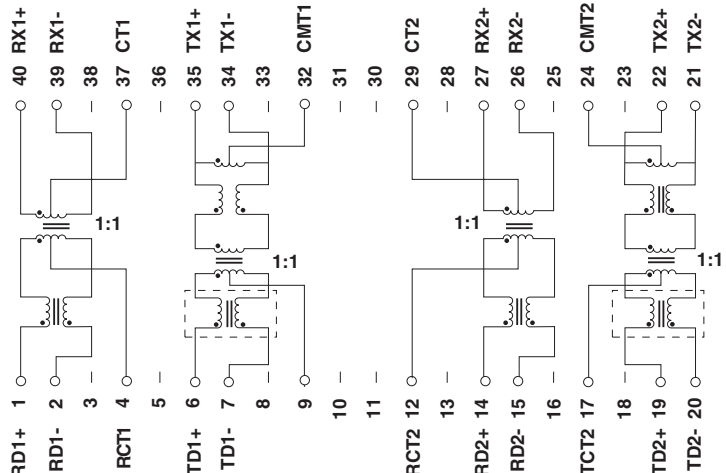

NOTE: H1027 has input common mode choke on pins 6-7 and pins 19-20.  
H1028 does not have the additional choke.

**Dual Port Solutions:** The H1027, H1028, H1049, and H1026 are designed to support two RJ-45 connectors. The H1027 and the H1028 have the same pinout. The H1027 has an additional common mode choke on both transmit channels. The H1049 and the H1026 offer different pinouts for design flexibility.



# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES


For Use with Transceivers Requiring  
1:1 Transmit and Receive Turns Ratios




**Pulse**  
A TECHNITROL COMPANY

## Schematics (continued)


### H1200

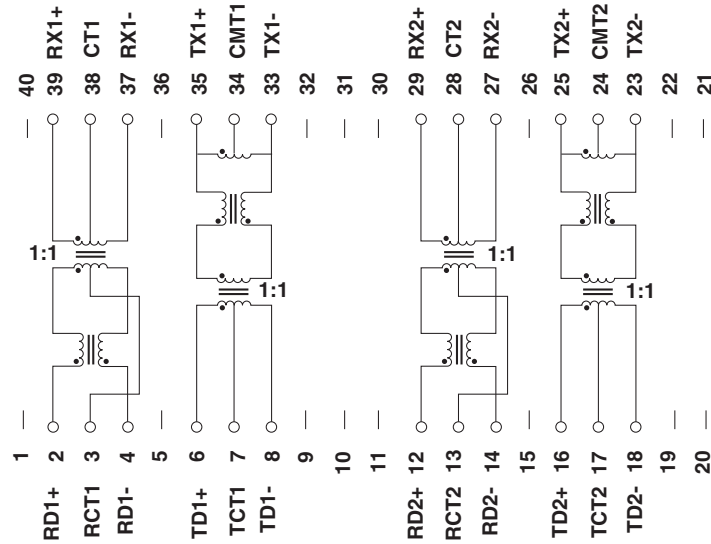

### H1174

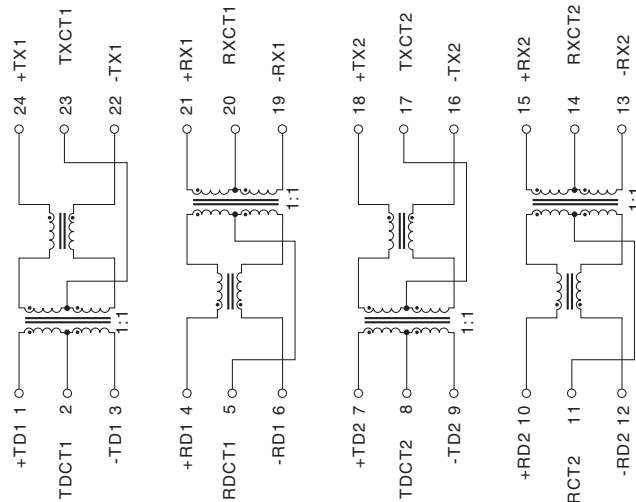

### H1270, HX1294

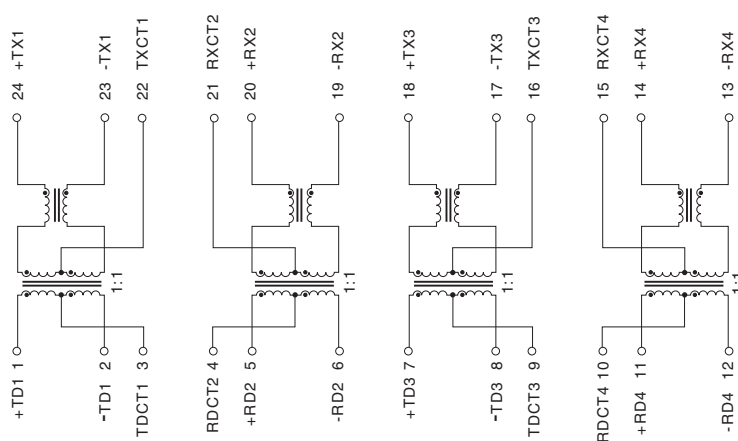




# 10/100BASE-TX DUAL PORT TRANSFORMER MODULES

For Use with Transceivers Requiring  
1:1 Transmit and Receive Turns Ratios




## Tape & Reel Specifications


### H1XXX

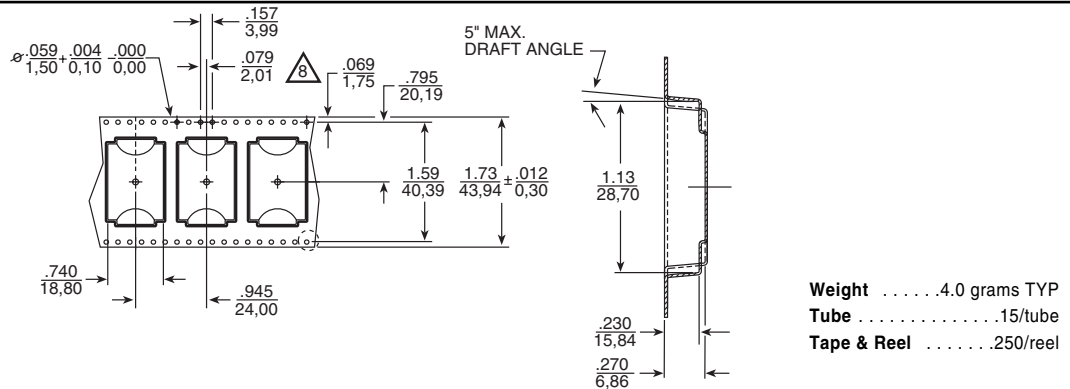

### H1174/H1270

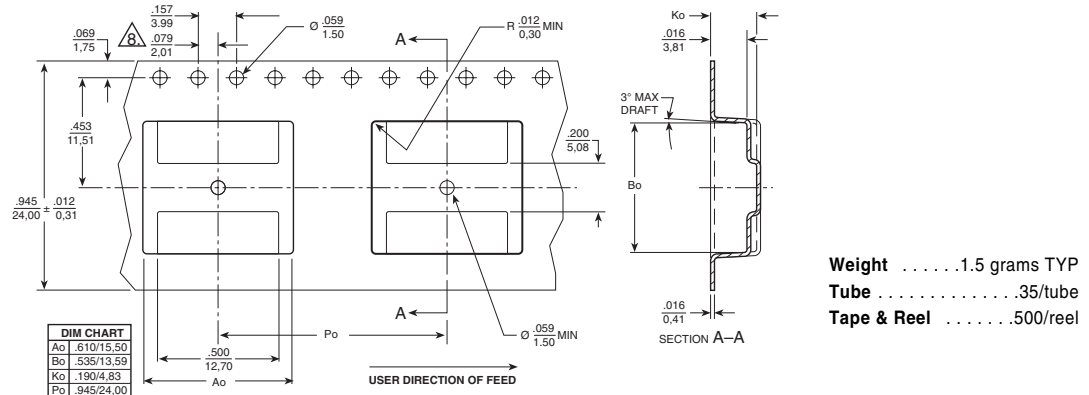

### HX1294

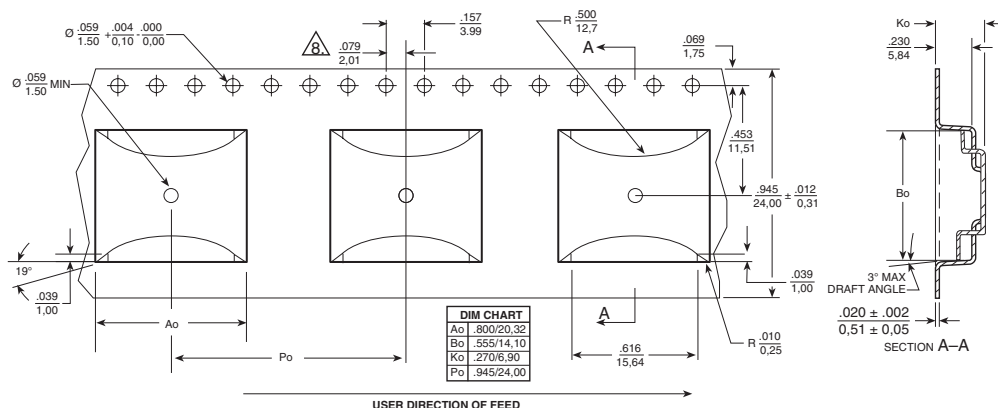

## For More Information:

**Pulse Worldwide Headquarters**  
 12220 World Trade Dr.  
 San Diego, CA 92128  
 U.S.A.

**Pulse Europe**  
 Einsteinstrasse 1  
 D-71083 Herrenberg  
 Germany

**Pulse China Headquarters**  
 B402, Shenzhen  
 Tech-Innovation International  
 Tenth Kejian Rd.  
 High-Tech Industrial Park  
 Nanshan District, Shenzhen  
 China  
 Tel: 86 755 33966678  
 Fax: 86 755 33966700

**Pulse North China**  
 Room 1503  
 XinYin Building  
 No. 888 YiShan Rd.  
 Shanghai 200233  
 China  
 Tel: 86 21 54643211/2  
 Fax: 86 21 54643210

**Pulse South Asia**  
 150 Kampong Ampat  
 #07-01/02  
 KA Centre  
 Singapore 368324

**Pulse North Asia**  
 No. 26, Kao Ching Rd.  
 Yang Mei Chen  
 Taoyuan Hsien  
 Taiwan  
 R. O. C.  
 Tel: 886 3 4641811  
 Fax: 886 3 4641911

[www.pulseeng.com](http://www.pulseeng.com)

Tel: 858 674 8100  
 Fax: 858 674 8262

Tel: 49 7032 7806 0

Fax: 49 7032 7806 135

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2007. Pulse Engineering, Inc. All rights reserved.