

V 1060

Features:

- T0-5 metal-glass housing
- type 60 material
- low temperature coefficient

Application:

- industrial control systems
- automatic lamp switching


V 1072

Features:

- T0-5 metal-glass housing
- type 72 material
- fast response

Application:

- light barriers
- automatic dimming devices

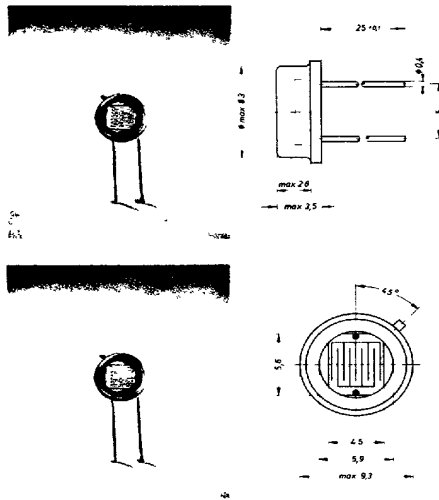

TYP	R ₁₀ [kΩ]	R ₁₀₀ [kΩ]	R ₀₁ [kΩ]	R ₀₅ [kΩ]	V _{max} [V]	P _{max} [mW]	t _{an} [ms]	t _{ab} [ms]	TK [%K]
V 1060 11	2,0	0,5	9	27	150	250	60	35	0,3
1060 12	3,4	0,7	27	81	150	250	50	30	0,35
1060 13	8,1	1,2	80	240	150	250	35	28	0,4
1060 14	30	2,2	2 000	6 000	150	250	20	25	0,5
V 1060 21	4,2	1,2	19	57	250	250	60	35	0,3
1060 22	7,0	1,6	55	165	250	250	50	30	0,35
V 1060 31	91	25	400	1 200	350	250	60	35	0,3
1060 32	152	35	1 200	3 600	350	250	50	30	0,35
V 1072 11*	4,5	0,7	50	150	50	50	10	10	2
1072 12*	15,5	1,3	500	1 500	50	50	10	10	2
1072 13*	55	2,4	10 000	30 000	50	50	7	10	2
1072 14*	390	6,6	100 000	100 000	50	50	5	10	2
V 1072 21*	9,5	1,45	100	100 000	175	50	10	10	2
1072 22*	32	2,8	1 000	100 000	175	50	10	10	2
1072 23*	115	5,1	20 000	100 000	175	50	7	10	2
1072 24*	840	12,5	100 000	100 000	175	50	5	10	2

*on request and with higher quantities only

