

Features

- Fast Read Access Time - 45 ns
- Low Power CMOS Operation
 - 100 μ A max. Standby
 - 30 mA max. Active at 5 MHz
- Wide Selection of JEDEC Standard Packages
 - 40-Lead 600-mil PDIP and Cerdip
 - 44-Pad PLCC and LCC
 - 40-Lead TSOP
- 5 V \pm 10% Power Supply
- High Reliability CMOS Technology
 - 2000 V ESD Protection
 - 200 mA Latchup Immunity
- Rapid Programming - 100 μ s/word (typical)
- Two-line Control
- CMOS and TTL Compatible Inputs and Outputs
- Integrated Product Identification Code
- Full Military, Commercial and Industrial Temperature Ranges

Description

The AT27C1024 is a low-power, high performance 1,048,576 bit ultraviolet erasable and electrically programmable read only memory (EPROM) organized 64K x 16. It requires only one 5-V power supply in normal read mode operation. Any word can be accessed in less than 45 ns, eliminating the need for speed reducing WAIT states. The by-16 organization make this part ideal for high-performance 16 and 32 bit microprocessor systems.


(continued)

Pin Configurations


Pin Name	Function
A0-A15	Addresses
O0-O15	Outputs
CE	Chip Enable
OE	Output Enable
PGM	Program Strobe
NC	No Connect

Note: Both GND pins must be connected.

CDIP, PDIP Top View

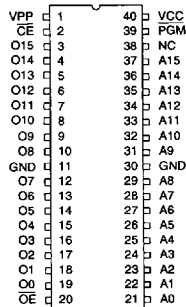


LCC, JLCC, PLCC Top View

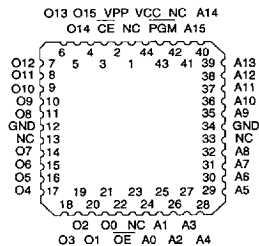

Note: PLCC Package Pins 1 and 23 are DON'T CONNECT.

TSOP Top View
Type 1

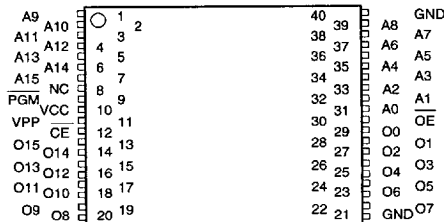

Description Continued


In read mode, the AT27C1024 typically consumes 15 mA. Standby mode supply current is typically less than 10 μ A.

The AT27C1024 is available in industry standard JEDEC-approved packages including: one time programmable (OTP) plastic PDIP, PLCC, and TSOP, as well as windowed ceramic Cerdip and LCC. The device features two-line control (CE, OE) to eliminate bus contention in high-speed systems.

With high density 64K word storage capability, the AT27C1024 allow firmware to be stored reliably and to be accessed by the system without the delays of mass storage media.

Atmel's 27C1024 have additional features to ensure high quality and efficient production use. The Rapid Programming Algorithm reduces the time required to program the part and guarantees reliable programming. Programming time is typically only 100 μ s/word. The Integrated Product Identification Code electronically identifies the device and manufacturer. This feature is used by industry standard programming equipment to select the proper programming algorithms and voltages.

Block Diagram

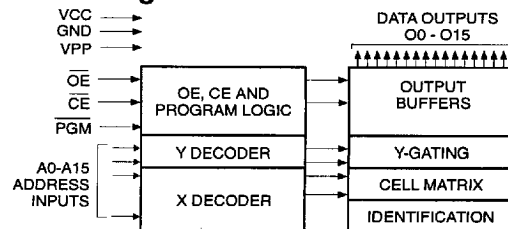

Absolute Maximum Ratings*

Temperature Under Bias	-55°C to +125°C
Storage Temperature	-65°C to +150°C
Voltage on Any Pin with Respect to Ground	-2.0 V to +7.0 V ⁽¹⁾
Voltage on A9 with Respect to Ground	-2.0 V to +14.0 V ⁽¹⁾
V _{PP} Supply Voltage with Respect to Ground	-2.0 V to +14.0 V ⁽¹⁾
Integrated UV Erase Dose	7258 W•sec/cm ²

Notes:

1. Minimum voltage is -0.6 V dc which may undershoot to -2.0 V for pulses of less than 20 ns. Maximum output pin voltage is V_{CC}+0.75 V dc which may overshoot to +7.0 V for pulses of less than 20 ns.

*NOTICE: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Erase Characteristics

The entire memory array of the AT27C1024 is erased (all outputs read as V_{OH}) after exposure to ultraviolet light at a wavelength of 2537Å. Complete erasure is assured after a minimum of 20 minutes exposure using 12,000 μ W/cm² intensity lamps spaced one inch away from the chip. Minimum erase time for lamps at other intensity ratings can be calculated from the minimum integrated erasure dose of 15 W•sec/cm². To prevent unintentional erasure, an opaque label is recommended to cover the clear window on any UV erasable EPROM which will be subjected to continuous fluorescent indoor lighting or sunlight.

Operating Modes


Mode \ Pin	CE	OE	PGM	Ai	V _{PP}	V _{CC}	Outputs
Read	V _{IL}	V _{IL}	X ⁽¹⁾	Ai	X	V _{CC}	DOUT
Output Disable	X	V _{IH}	X	X	X	V _{CC}	High Z
Standby	V _{IH}	X	X	X	X ⁽⁵⁾	V _{CC}	High Z
Rapid Program ⁽²⁾	V _{IL}	V _{IH}	V _{IL}	Ai	V _{PP}	V _{CC}	DIN
PGM Verify	V _{IL}	V _{IL}	V _{IH}	Ai	V _{PP}	V _{CC}	DOUT
PGM Inhibit	V _{IH}	X	X	X	V _{PP}	V _{CC}	High Z
Product Identification ⁽⁴⁾	V _{IL}	V _{IL}	X	A9=V _{IH} ⁽³⁾ A0=V _{IH} or V _{IL} A1-A15=V _{IL}	V _{CC}	V _{CC}	Identification Code

- Notes:
1. X can be V_{IL} or V_{IH}.
 2. Refer to Programming characteristics.
 3. V_H = 12.0 \pm 0.5 V.
 4. Two identifier bytes may be selected. All Ai inputs are held low (V_{IL}), except A9 which is set to V_H

5. Standby V_{CC} current (I_{SB}) is specified with V_{PP}=V_{CC}. V_{CC} > V_{PP} will cause a slight increase in I_{SB}.

D.C. and A.C. Operating Conditions for Read Operation

AT27C1024								
		-45	-55	-70	-85	-10	-12	-15
Operating Temperature (Case)	Com.	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C
	Ind.	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
	Mil.				-55°C - 125°C	-55°C - 125°C	-55°C - 125°C	-55°C - 125°C
V _{CC} Power Supply		5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%	5 V ± 10%

 = Advance Information

3

D.C. and Operating Characteristics for Read Operation

Symbol	Parameter	Condition	Min	Max	Units
I _{LI}	Input Load Current	V _{IN} = 0 V to V _{CC}	Com., Ind.	± 1	μA
			Mil.	± 5	μA
I _{LO}	Output Leakage Current	V _{OUT} = 0 V to V _{CC}	Com., Ind.	± 5	μA
			Mil.	± 10	μA
I _{PP1} ⁽²⁾	V _{PP} ⁽¹⁾ Read/Standby Current	V _{PP} = V _{CC}		10	μA
I _{SB}	V _{CC} ⁽¹⁾ Standby Current	I _{SB1} (CMOS), $\overline{CE} = V_{CC} \pm 0.3$ V		100	μA
		I _{SB2} (TTL), $\overline{CE} = 2.0$ to V _{CC} +0.5 V		1	mA
I _{CC}	V _{CC} Active Current	f = 5 MHz, I _{OUT} = 0 mA, $\overline{CE} = V_{IL}$	Com.	30	mA
			Ind., Mil.	40	mA
V _{IL}	Input Low Voltage		-0.6	0.8	V
V _{IH}	Input High Voltage		2.0	V _{CC} + 0.5	V
V _{OL}	Output Low Voltage	I _{OL} = 2.1 mA		.45	V
V _{OH}	Output High Voltage	I _{OH} = -100 μA		V _{CC} -0.3	V
		I _{OH} = -2.5 mA		3.5	V
		I _{OH} = -400 μA		2.4	V


Notes: 1. V_{CC} must be applied simultaneously or before V_{PP}, and removed simultaneously or after V_{PP}.

2. V_{PP} may be connected directly to V_{CC}, except during programming. The supply current would then be the sum of I_{CC} and I_{PP}.

A.C. Characteristics for Read Operation


Symbol Parameter			AT27C1024												Units		
			-45		-55		-70		-85		-10		-12			-15	
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		Min	Max
tACC (3)	Address to Output Delay	$\overline{CE} = \overline{OE}$ = VIL	Com., Ind.	45	55	70	85	100	120	150	ns						
			Mil.			85	100	120	150	ns							
tCE (2)	\overline{CE} to Output Delay	$\overline{OE} = V_{IL}$	45	55	70	85	100	120	150	ns							
tOE (2,3)	\overline{OE} to Output Delay	$\overline{CE} = V_{IL}$	20	25	25	30	30	35	50	ns							
tDF (4,5)	\overline{OE} or \overline{CE} High to Output Float		20	25	25	30	30	30	40	ns							
tOH	Output Hold from Address, \overline{CE} or \overline{OE} , whichever occurred first		7	7	7	0	0	0	0	ns							

Notes: 2, 3, 4, 5. - see AC Waveforms for Read Operation.

 = Advance Information



A.C. Waveforms for Read Operation ⁽¹⁾

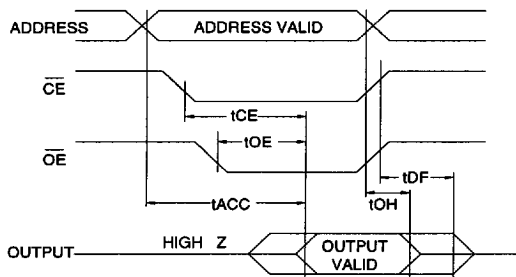


Notes:


1. Timing measurement references are 0.8 V and 2.0 V. Input AC driving levels are 0.45 V and 2.4 V, unless otherwise specified. Timing measurement reference is 1.5 V for -45, -55 and -70 parts. Input AC driving levels are 0.0 V and 3.0 V for -45, -55 and -70 parts, unless otherwise specified.
2. \overline{OE} may be delayed up to t_{CE-tOE} after the falling edge of \overline{CE} without impact on t_{CE} .
3. \overline{OE} may be delayed up to $t_{ACC-tOE}$ after the address is valid without impact on t_{ACC} .
4. This parameter is only sampled and is not 100% tested.
5. Output float is defined as the point when data is no longer driven.

Input Test Waveforms and Measurement Levels


For -45, -55, and -70 Devices Only:

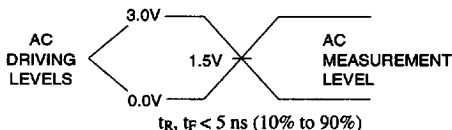

For -85, -10, -12, -15 Devices Only:

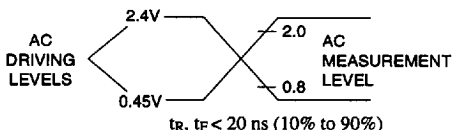

Output Test Load




Note: $C_L = 100$ pF including jig capacitance except -45, -55 and -70 devices, where $C_L = 30$ pF.

Pin Capacitance ($f = 1$ MHz $T = 25^\circ\text{C}$) ⁽¹⁾

	Typ	Max	Units	Conditions
C_{IN}	4	10	pF	$V_{IN} = 0V$
C_{OUT}	8	12	pF	$V_{OUT} = 0V$

Notes: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested.

Programming Waveforms ⁽¹⁾

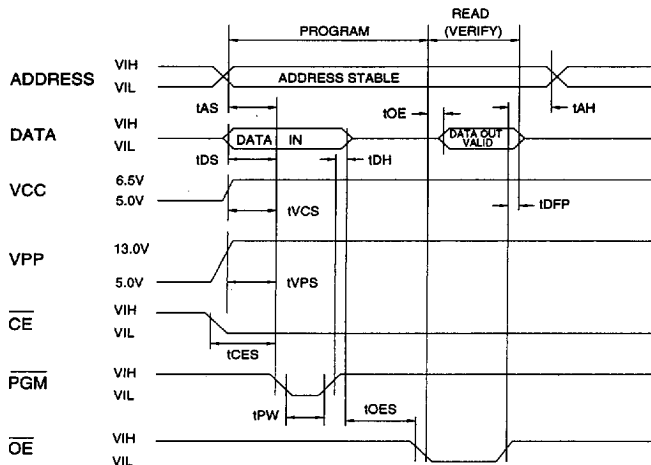

Notes:

1. The Input Timing Reference is 0.8 V for V_{IL} and 2.0 V for V_{IH} .
2. t_{OE} and t_{DF} are characteristics of the device but must be accommodated by the programmer.
3. When programming the AT27C1024 a 0.1- μF capacitor is required across V_{PP} and ground to suppress spurious voltage transients.

D.C. Programming Characteristics

$T_A = 25 \pm 5^\circ\text{C}$, $V_{CC} = 6.5 \pm 0.25\text{ V}$, $V_{PP} = 13.0 \pm 0.25\text{ V}$

Sym- bol	Parameter	Test Conditions	Limits		Units
			Min	Max	
I_{LI}	Input Load Current	$V_{IN}=V_{IL}, V_{IH}$		10	μA
V_{IL}	Input Low Level	(All Inputs)	-0.6	0.8	V
V_{IH}	Input High Level		2.0	$V_{CC}+0.1$	V
V_{OL}	Output Low Volt.	$I_{OL}=2.1\text{ mA}$.45	V
V_{OH}	Output High Volt.	$I_{OH}=400\text{ }\mu\text{A}$	2.4		V
I_{CC2}	V_{CC} Supply Current (Program and Verify)			50	mA
I_{PP2}	V_{PP} Supply Current	$\overline{CE}=\overline{PGM}=V_{IL}$		30	mA
V_{ID}	A9 Product Identification Voltage		11.5	12.5	V

A.C. Programming Characteristics

$T_A = 25 \pm 5^\circ\text{C}$, $V_{CC} = 6.5 \pm 0.25\text{ V}$, $V_{PP} = 13.0 \pm 0.25\text{ V}$

Sym- bol	Parameter	Test Conditions* (see Note 1)	Limits		Units
			Min	Max	
t_{AS}	Address Setup Time		2		μs
t_{CES}	\overline{CE} Setup Time		2		μs
t_{OES}	\overline{OE} Setup Time		2		μs
t_{DS}	Data Setup Time		2		μs
t_{AH}	Address Hold Time		0		μs
t_{DH}	Data Hold Time		2		μs
t_{DFP}	\overline{OE} High to Out- put Float Delay	(Note 2)	0	130	ns
t_{VPS}	V_{PP} Setup Time		2		μs
t_{VCS}	V_{CC} Setup Time		2		μs
t_{PW}	PGM Program Pulse Width	(Note 3)	95	105	μs
t_{OE}	Data Valid from \overline{OE}			150	ns

*A.C. Conditions of Test:

Input Rise and Fall Times (10% to 90%) 20 ns
 Input Pulse Levels 0.45 V to 2.4 V
 Input Timing Reference Level 0.8 V to 2.0 V
 Output Timing Reference Level 0.8 V to 2.0 V

Notes:

- V_{CC} must be applied simultaneously or before V_{PP} and removed simultaneously or after V_{PP} .
- This parameter is only sampled and is not 100% tested. Output Float is defined as the point where data is no longer driven — see timing diagram.
- Program Pulse width tolerance is 100 $\mu\text{sec} \pm 5\%$.


Atmel's 27C1024 Integrated Product Identification Code

Codes	Pins										Hex Data
	A0	015-08	07	06	05	04	03	02	01	00	
Manufacturer	0	0	0	0	0	1	1	1	1	0	001E
Device Type	1	0	1	1	1	1	0	0	0	1	00F1

3

Rapid Programming Algorithm

A 100 μs PGM pulse width is used to program. The address is set to the first location. V_{CC} is raised to 6.5 V and V_{PP} is raised to 13.0 V. Each address is first programmed with one 100 μs PGM pulse without verification. Then a verification / reprogramming loop is executed for each address. In the event a word fails to pass verification, up to 10 successive 100 μs pulses are applied with a verification after each pulse. If the word fails to verify after 10 pulses have been applied, the part is considered failed. After the word verifies properly, the next address is selected until all have been checked. V_{PP} is then lowered to 5.0 V and V_{CC} to 5.0 V. All words are read again and compared with the original data to determine if the device passes or fails.

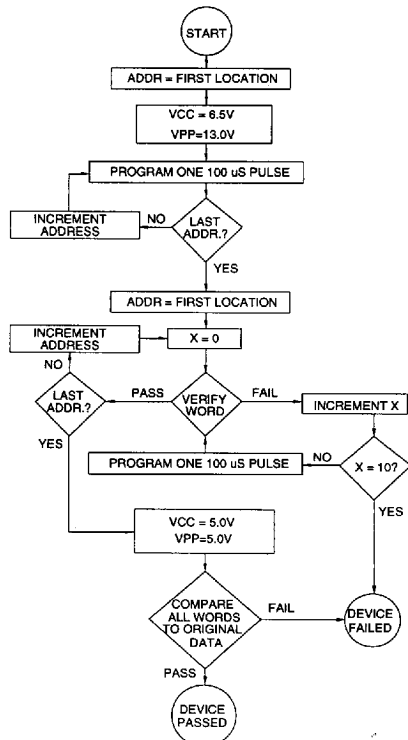

Ordering Information

☐ = Advance Information

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
45	30	0.1	AT27C1024-45DC AT27C1024-45JC AT27C1024-45LC AT27C1024-45PC AT27C1024-45TC ⁽¹⁾ AT27C1024-45VC	40DW6 44J 44LW 40P6 40T 40V	Commercial (0°C to 70°C)
45	40	0.1	AT27C1024-45DI AT27C1024-45JI AT27C1024-45LI AT27C1024-45PI AT27C1024-45TI ⁽¹⁾ AT27C1024-45VI	40DW6 44J 44LW 40P6 40T 40V	Industrial (-40°C to 85°C)
55	30	0.1	AT27C1024-55DC AT27C1024-55JC AT27C1024-55LC AT27C1024-55PC AT27C1024-55TC ⁽¹⁾ AT27C1024-55VC	40DW6 44J 44LW 40P6 40T 40V	Commercial (0°C to 70°C)
55	40	0.1	AT27C1024-55DI AT27C1024-55JI AT27C1024-55LI AT27C1024-55PI AT27C1024-55TI ⁽¹⁾ AT27C1024-55VI	40DW6 44J 44LW 40P6 40T 40V	Industrial (-40°C to 85°C)
70	30	0.1	AT27C1024-70DC AT27C1024-70JC AT27C1024-70LC AT27C1024-70PC AT27C1024-70TC ⁽¹⁾ AT27C1024-70VC	40DW6 44J 44LW 40P6 40T 40V	Commercial (0°C to 70°C)
70	40	0.1	AT27C1024-70DI AT27C1024-70JI AT27C1024-70LI AT27C1024-70PI AT27C1024-70TI ⁽¹⁾ AT27C1024-70VI	40DW6 44J 44LW 40P6 40T 40V	Industrial (-40°C to 85°C)
85	30	0.1	AT27C1024-85DC AT27C1024-85JC AT27C1024-85LC AT27C1024-85PC AT27C1024-85TC ⁽¹⁾ AT27C1024-85VC	40DW6 44J 44LW 40P6 40T 40V	Commercial (0°C to 70°C)
85	40	0.1	AT27C1024-85DI AT27C1024-85JI AT27C1024-85LI AT27C1024-85PI AT27C1024-85TI ⁽¹⁾ AT27C1024-85VI	40DW6 44J 44LW 40P6 40T 40V	Industrial (-40°C to 85°C)

3-112

AT27C1024

1074177 0008161 167

Ordering Information

t _{ACC} (ns)	I _{CC} (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
85	40	0.1	AT27C1024-85DM AT27C1024-85KM ⁽²⁾ AT27C1024-85LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
100	30	0.1	AT27C1024-10DC AT27C1024-10JC AT27C1024-10KC ⁽²⁾ AT27C1024-10LC AT27C1024-10PC AT27C1024-10TC ⁽¹⁾ AT27C1024-10VC	40DW6 44J 44KW 44LW 40P6 40T 40V	Commercial (0°C to 70°C)
100	40	0.1	AT27C1024-10DI AT27C1024-10JI AT27C1024-10KI ⁽²⁾ AT27C1024-10LI AT27C1024-10PI AT27C1024-10TI ⁽¹⁾ AT27C1024-10VI	40DW6 44J 44KW 44LW 40P6 40T 40V	Industrial (-40°C to 85°C)
			AT27C1024-10DM AT27C1024-10KM ⁽²⁾ AT27C1024-10LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
120	30	0.1	AT27C1024-12DC AT27C1024-12JC AT27C1024-12KC ⁽²⁾ AT27C1024-12LC AT27C1024-12PC AT27C1024-12TC ⁽¹⁾ AT27C1024-12VC	40DW6 44J 44KW 44LW 40P6 40T 40V	Commercial (0°C to 70°C)
120	40	0.1	AT27C1024-12DI AT27C1024-12JI AT27C1024-12KI ⁽²⁾ AT27C1024-12LI AT27C1024-12PI AT27C1024-12TI ⁽¹⁾ AT27C1024-12VI	40DW6 44J 44KW 44LW 40P6 40T 40V	Industrial (-40°C to 85°C)
			AT27C1024-12DM AT27C1024-12KM ⁽²⁾ AT27C1024-12LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024-12DM/883 AT27C1024-12KM/883 AT27C1024-12LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
150	30	0.1	AT27C1024-15DC AT27C1024-15JC AT27C1024-15KC ⁽²⁾ AT27C1024-15LC AT27C1024-15PC AT27C1024-15TC ⁽¹⁾ AT27C1024-15VC	40DW6 44J 44KW 44LW 40P6 40T 40V	Commercial (0°C to 70°C)



1074177 0008162 0T3

Ordering Information

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
150	40	0.1	AT27C1024-15DI	40DW6	Industrial (-40°C to 85°C)
			AT27C1024-15JI	44J	
			AT27C1024-15KI ⁽²⁾	44KW	
			AT27C1024-15LI	44LW	Military (-55°C to 125°C)
			AT27C1024-15PI	40P6	
			AT27C1024-15TI ⁽¹⁾	40T	
			AT27C1024-15VI	40V	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			AT27C1024-15DM	40DW6	
			AT27C1024-15KM ⁽²⁾	44KW	
90	40	0.1	AT27C1024-15LM	44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			AT27C1024-15DM/883	40DW6	
			AT27C1024-15KM/883 ⁽²⁾	44KW	
			AT27C1024-15LM/883	44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			5962-86805 07 QX	40DW6	
			5962-86805 07 XX	44LW	
			5962-86805 06 QX	40DW6	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			5962-86805 06 XX	44LW	
			5962-86805 05 QX	40DW6	Military/883C Class B, Fully Compliant (-55°C to 125°C)
120	40	0.1	5962-86805 05 XX	44LW	
			5962-86805 04 QX	40DW6	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			5962-86805 04 XX	44LW	
			5962-86805 03 QX	40DW6	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			5962-86805 03 XX	44LW	
			5962-86805 02 QX	40DW6	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			5962-86805 02 XX	44LW	
			5962-86805 01 QX	40DW6	Military/883C Class B, Fully Compliant (-55°C to 125°C)
			5962-86805 01 XX	44LW	

Notes: 1. The 40T package is not recommended for new designs and is being replaced by the 40V package.
2. The 44KW package is not recommended for new designs.

Package Type	
40DW6	40 Lead, 0.600" Wide, Windowed, Ceramic Dual Inline Package (Cerdip)
44J	44 Lead, Plastic J-Leaded Chip Carrier OTP (PLCC)
44KW	44 Lead, Windowed, Ceramic J-Leaded Chip Carrier (JLCC)
44LW	44 Pad, Windowed, Ceramic Leadless Chip Carrier (LCC)
40P6	40 Lead, 0.600" Wide, Plastic Dual Inline Package OTP (PDIP)
40T	40 Lead, Plastic Thin Small Outline Package OTP (TSOP) 10 x 20 mm
40V	40 Lead, Plastic Thin Small Outline Package OTP (TSOP) 10 x 14 mm

3-114

AT27C1024

1074177 0008163 T3T