



# 1N4099 THRU 1N4135 AND 1N4614 THRU 1N4627

500mW LOW NOISE SILICON ZENER DIODES



## FEATURES

- \* Zener voltage 1.8 to 100V
- \* Low noise
- \* Low reverse leakage

## MECHANICAL CHARACTERISTICS

- \* CASE: Hermetically sealed glass case, DO - 35.
- \* FINISH: All external surfaces are corrosion resistant and leads solderable.
- \* THERMAL RESISTANCE: 200°C/W (Typical) junction to lead at 0.375 - inches from body in DO - 35. Metallurgically bonded DO - 35's exhibit less than 100°C/W at zero distance from body.
- \* POLARITY: Banded end is cathode.
- \* WEIGHT: 0.2 grams
- \* MOUNTING POSITIONS: Any

## MAXIMUM RATINGS

Junction and Storage temperatures: - 65°C to + 200°C

DC Power Dissipation: 500mW


Power Derating: 4.0mW/°C above 50°C in DO - 35

Forward Voltage @ 200mA: 1.1 Volts (1N4099 - 1N4135)

@ 100mA: 1.0 Volts (1N4614 - 1N4627).

VOLTAGE RANGE  
1.8 to 100 Volts

## DO-35



All dimensions in inches mm

## \* ELECTRICAL CHARACTERISTICS @ 25°C

JEDEC TYPE NO.	NOMINAL ZENER VOLTAGE $V_Z @ I_Z$ (Note 1) VOLTS	ZENER TEST CURRENT $I_Z$ $\mu A$	MAXIMUM ZENER IMPEDANCE $Z_T$ (Note 2) OHMS	MAXIMUM REVERSE CURRENT $I_R @ V_R$ $\mu A$	MAXIMUM NOISE DENSITY $N_b @ f_z$ $\mu V / \sqrt{Hz}$	MAXIMUM ZENER CURRENT $I_{ZM}$ (Note 3) mA	MAXIMUM TEMP. COEFF. OF ZENER VOLTAGE $\alpha_{VZ}$ %/°C
1N4614	1.8	250	1200	7.5	1	120	-0.075
1N4615	2.0	250	1250	5.0	1	110	-0.075
1N4616	2.2	250	1300	4.0	1	100	-0.075
1N4617	2.4	250	1400	2.0	1	96	-0.075
1N4618	2.7	250	1500	1.0	1	90	-0.075
1N4619	3.0	250	1600	0.8	1	87	-0.075
1N4620	3.3	250	1650	7.5	1.5	85	-0.075
1N4621	3.6	250	1700	7.5	2	83	-0.066
1N4622	3.9	250	1650	5.0	2	80	-0.060
1N4623	4.3	250	1600	4.0	2	77	-0.050
1N4624	4.7	250	1550	10.0	3	75	-0.050 + 0.020
1N4625	5.1	250	1500	10.0	3	70	-0.045 + 0.030
1N4626	5.6	250	1400	10.0	4	66	-0.030 + 0.040
1N4627	6.2	250	1200	10.0	5	61	-0.010 + 0.050
1N4099	6.8	250	200	10.0	5.17	56	0.060
1N4100	7.5	250	200	10.0	5.70	51	0.065
1N4101	8.2	250	200	1.0	6.24	46	0.070
1N4102	8.7	250	200	1.0	6.61	44	0.075
1N4103	9.1	250	200	1.0	6.92	42	0.080
1N4104	10	250	200	1.0	7.60	38	0.080
1N4105	11	250	200	.05	8.44	36	0.080
1N4106	12	250	200	.05	9.12	32	0.080
1N4107	13	250	200	.05	9.87	29	0.080
1N4108	14	250	200	.05	10.66	27	0.085
1N4109	15	250	100	.05	11.40	25	0.085
1N4110	16	250	100	.05	12.15	24	0.085
1N4111	17	250	100	.05	12.92	22	0.090
1N4112	18	250	100	.05	13.67	21	0.090
1N4113	19	250	150	.05	14.44	20	0.090
1N4114	20	250	150	.01	15.20	19	0.090
1N4115	22	250	150	.01	16.72	17	0.090
1N4116	24	250	150	.01	18.25	16	0.090
1N4117	25	250	150	.01	19.00	15	0.090
1N4118	27	250	150	.01	20.45	14	0.090
1N4119	28	250	200	.01	21.28	14	0.095
1N4120	30	250	200	.01	22.80	13	0.095
1N4121	33	250	200	.01	25.06	12	0.095
1N4122	36	250	200	.01	27.38	11	0.095
1N4123	39	250	200	.01	29.66	40	9.8
1N4124	43	250	250	.01	32.66	40	8.9
1N4125	47	250	250	.01	35.75	40	8.1
1N4126	51	250	300	.01	38.76	40	7.5
1N4127	56	250	300	.01	42.60	40	6.7
1N4128	60	250	400	.01	45.80	40	6.4
1N4129	62	250	500	.01	47.10	40	6.1
1N4130	68	250	700	.01	51.68	40	5.6
1N4131	75	250	700	.01	57.00	40	5.1
1N4132	82	250	800	.01	62.32	40	4.6
1N4133	87	250	1000	.01	66.12	40	4.4
1N4134	91	250	1200	.01	69.16	40	4.2
1N4135	100	250	1500	.01	76.00	40	3.8

**NOTE 1** The JEDEC type numbers shown above have a standard tolerance of  $\pm 5\%$  on the nominal Zener voltage. Also available in 2% and 1% tolerance, suffix C and D respectively.  $V_Z$  is measured with the diode in thermal equilibrium in 25°C still air.

**NOTE 2** Zener impedance is derived by superimposing on  $I_{ZT}$ , a 60 Hz rms a. c. current equal to 10% of  $I_{ZT}$  (25  $\mu A$  a. c.).

**NOTE 3** Based upon 400mW maximum power dissipation at 75°C lead temperature, allowance has been made for the higher voltage associated with operation at higher currents.

## RATINGS AND CHARACTERISTIC CURVES

### (1N4099 THRU 1N4135, 1N4614 THRU 1N4627)

Noise density( $N_D$ ) is specified in microvolts-rms per square-root-hertz. Actual measurement is performed using a 1  $KHz$  to 3  $KHz$  frequency bandpass filter at a constant Zener test current( $I_{ZT}$ ) at 25°C ambient temperature.  $N_D$  is calculated from the formula.

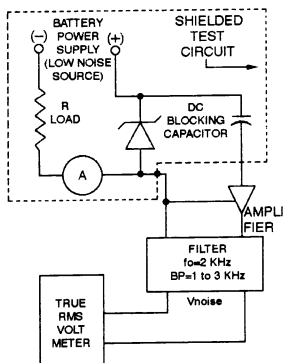


FIGURE 1 NOISE DENSITY MEASUREMENT CIRCUIT

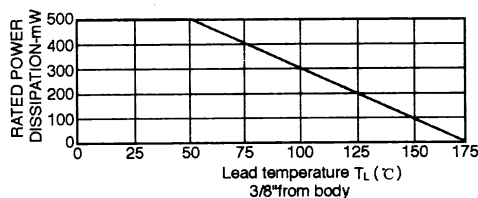


FIGURE 2 POWER DERATING CURVE

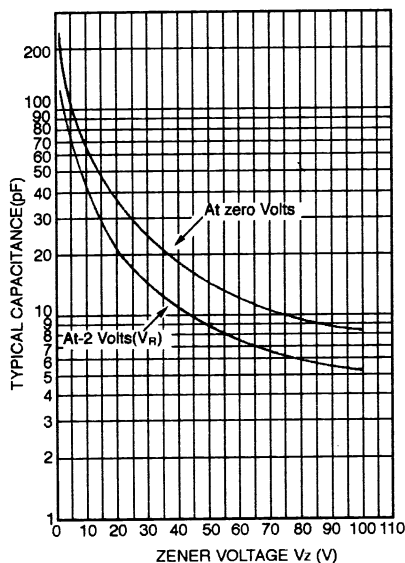


FIGURE 3 CAPACITANCE VS. ZENER VOLTAGE (TYPICAL)