

## KBP200 - KBP210

## SILICON BRIDGE RECTIFIERS

**PRV : 50 - 1000 Volts**


**Io : 2.0 Amperes**

### FEATURES :

- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board

### MECHANICAL DATA :

- \* Case : Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Terminals : Plated lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 3.4 grams

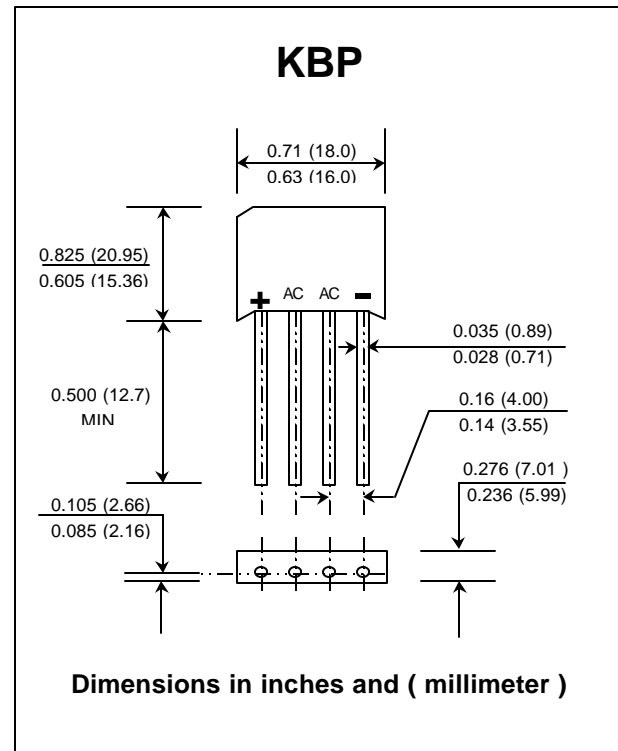

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

RATING	SYMBOL	KBP 200	KBP 201	KBP 202	KBP 204	KBP 206	KBP 208	KBP 210	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Current T <sub>c</sub> = 50 °C	I <sub>F(AV)</sub>	2.0							Amps.
Peak Forward Surge Current, Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	60							Amps.
Rating for fusing ( t < 8.3 ms. )	I <sup>2</sup> t	10							A <sup>2</sup> S
Maximum Forward Voltage per Diode at I <sub>F</sub> = 1.0 Amp.	V <sub>F</sub>	1.0							Volts
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C	I <sub>R</sub>	10							μA
	I <sub>R(H)</sub>	1.0							mA
Typical Junction Capacitance per Diode (Note 1)	C <sub>J</sub>	24							pF
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	30							°C/W
Operating Junction Temperature Range	T <sub>J</sub>	- 50 to + 125							°C
Storage Temperature Range	T <sub>STG</sub>	- 50 to + 125							°C


#### Notes :

- 1 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
- 2 ) Thermal resistance from Junction to Ambient with units mounted on a 0.47" X 0.47" ( 12mm X 12mm ) Cu. Pads.


**UPDATE : MARCH 6, 2000**

## RATING AND CHARACTERISTIC CURVES ( KBP200 - KBP210 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

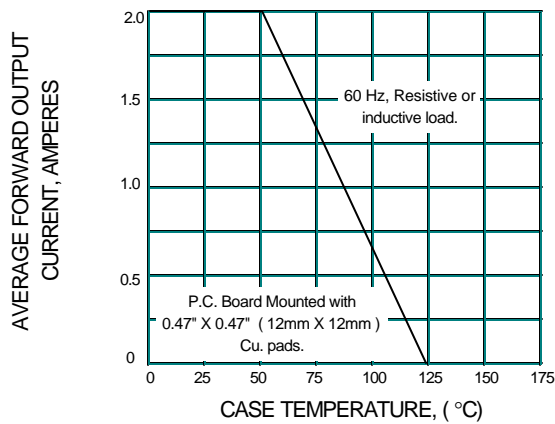

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

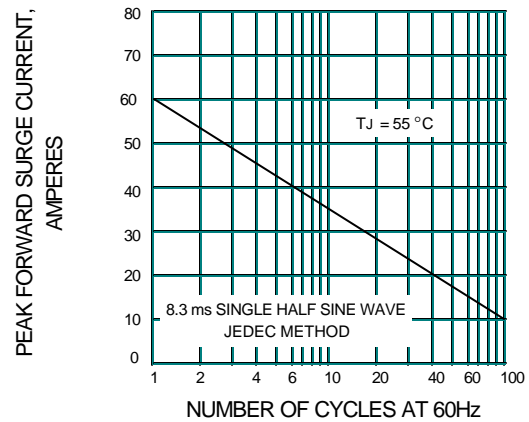

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

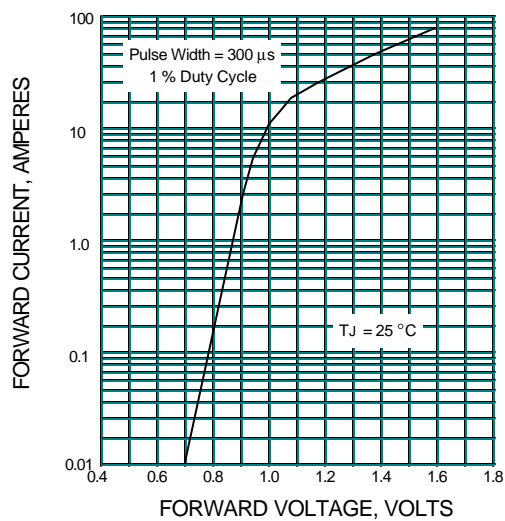

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

