


Features

- Low Reverse Recovery Time (T_{rr})
- Low Reverse Current
- Low Forward Voltage Drop
- High Current Capability
- Plastic Material: UL Flammability Classification Rating 94V-0

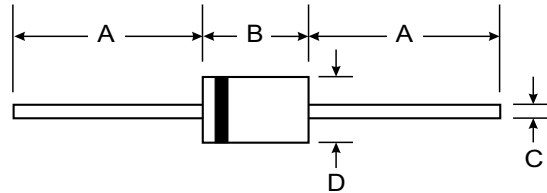

Mechanical Data

- Case: DO-15, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.4 grams (approx.)
- Mounting Position: Any
- Marking: Type Number


DO-15		
Dim	Min	Max
A	25.40	—
B	5.50	7.62
C	0.686	0.889
D	2.60	3.6
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	FR151	FR152	FR153	FR154	FR155	FR156	FR157	Unit
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 9.5mm Lead Length @ T _A = 75°C	I _(AV)	1.5							A
Peak Forward Surge Current 8.3ms Single half sine-wave Superimposed on Rated Load (JEDEC method)	I _{FM}	60							A
Maximum Instantaneous Forward Voltage @ 1.5A DC	V _F	1.3							V
Maximum DC Reverse Current at rated DC Blocking Voltage @ T _A = 25°C	I _R	5.0							μA
Maximum Full Load Reverse Current Full Cycle Average 9.5 mm lead length @ T _L = 55°C	I _R	100							μA
Maximum Reverse Recovery Time (Note 1)	T _{RR}	150				250	500		nS
Typical Junction Capacitance (Note 2)	C _J	25							pF
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +175							°C


Notes: 1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$
2. Measured at 1.0MHz applied reverse voltage of 4.0V.

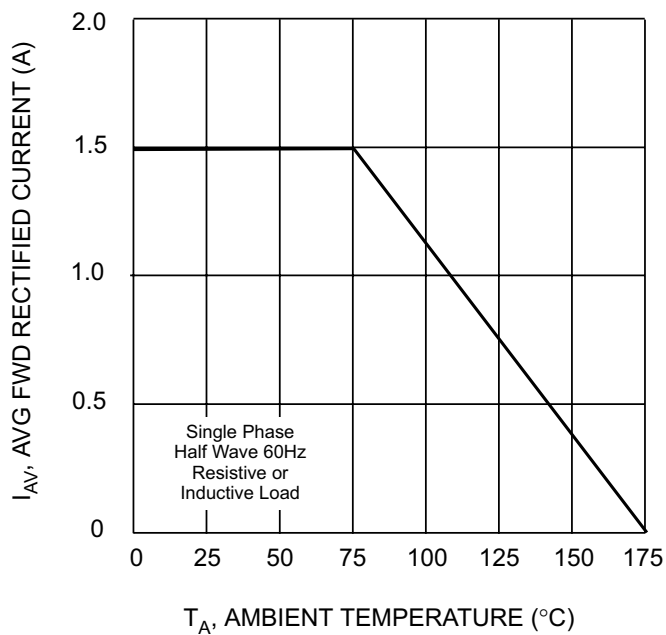


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1 Forward Derating Curve

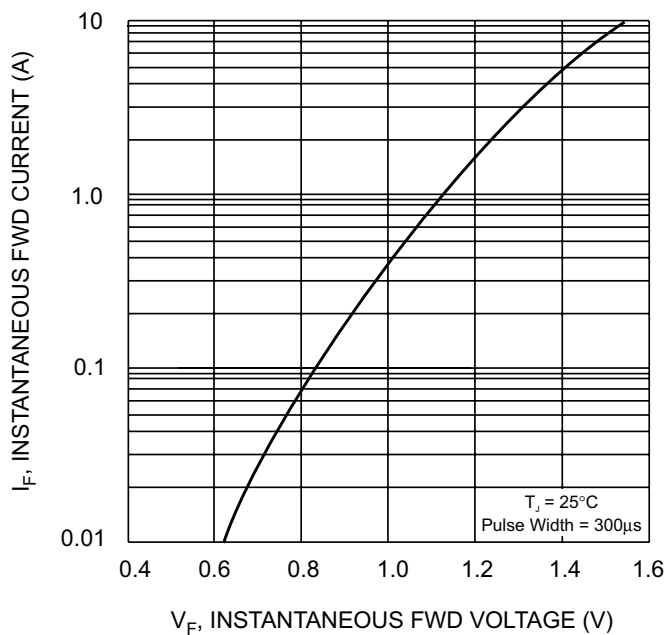

V_F , INSTANTANEOUS FWD VOLTAGE (V)
Fig. 2 Typical Forward Characteristics

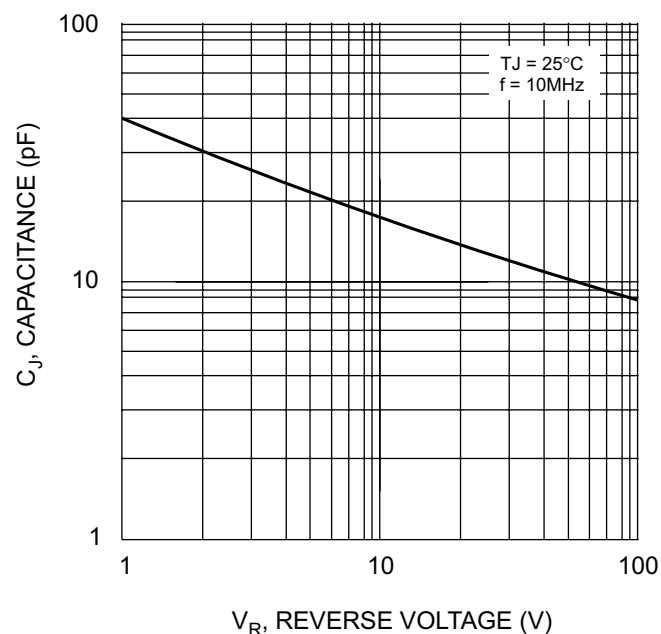

V_R , REVERSE VOLTAGE (V)
Fig. 3 Typical Junction Capacitance

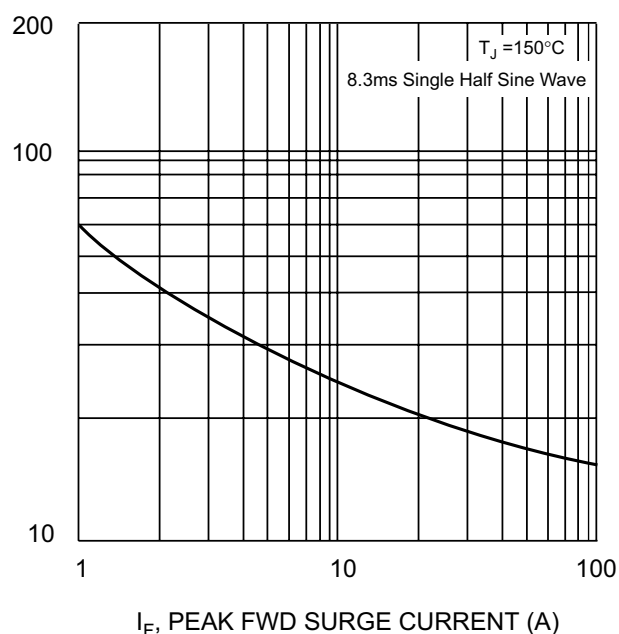

I_F , PEAK FWD SURGE CURRENT (A)
Fig. 4 Peak Forward Surge Current