

The Linear IC's Three-Terminal Low Current Negative Voltage Regulators

DESCRIPTION

The 79L00A Series of three terminal negative voltage regulators is available with several fixed output voltages making them useful in a wide range of applications. These regulators are inexpensive, vise-to-use devices suitable for a multitude of applications that require a regulated supply of up to 100 mA. These regulators feature internal current limiting and thermal shutdown making them remarkably rugged. No external components are required with the 79L00A devices in many applications.

These devices offer a substantial performance advantage over the traditional zener diode-resistor combination, as output impedance and quiescent current are substantially reduced.

The voltages available allow the 79L00A to be used in logic systems, instrumentation, HiFi, and other solid state electronic equipment.


The 79L00A is available in 3-Pin plastic package SOT54 (Z), 3-Pin mini power plastic package SOT89 (F) and the 8-Pin plastic package SO8 (D) offers superior quality and performance at low cost.

FEATURES

- High Output Current
 $I_o = 100 \text{ mA}$
- Fixed Output Voltage
 $V_o = -5 \text{ V}, -6 \text{ V}, -8 \text{ V}, -12 \text{ V}, -15 \text{ V}$
- Complementary Positive Regulators 78L00A Series
- Available in either $\pm 5\%$ (AC) Selection


DEVICE TYPE / NOMINAL VOLTAGE

| 5% Output Voltage Accuracy | Voltage | Package | | |
|----------------------------|---------|----------|----------|----------|
| | | Z Suffix | F Suffix | D Suffix |
| 79L05AC | -5 | 79L05ACZ | 79L05ACF | 79L05ACD |
| 79L06AC | -6 | 79L06ACZ | 79L06ACF | 79L06ACD |
| 79L08AC | -8 | 79L08ACZ | 79L08ACF | 79L08ACD |
| 79L09AC | -9 | 79L09ACZ | 79L09ACF | 79L09ACD |
| 79L12AC | -12 | 79L12ACZ | 79L12ACF | 79L12ACD |
| 79L15AC | -15 | 79L15ACZ | 79L15ACF | 79L15ACD |

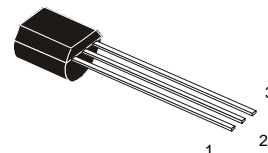


- 1 – Common
- 2 – Input
- 3 – Output

| | |
|---------|-------|
| | SOT54 |
| JEDEC | TO-92 |
| EIAJ | SC-43 |
| GOST | KT-26 |
| Weight: | 0.3g |



- 1 – Common
- 2 – Input
- 3 – Output

| | |
|---------|--------|
| | SOT89 |
| JEDEC | TO-243 |
| EIAJ | SC-62 |
| GOST | KT-47 |
| Weight: | 0.055g |



| | |
|---------|----------|
| | SOT96-1 |
| JEDEC | MS-012 |
| EIAJ | – |
| GOST | 4303.8-1 |
| Weight: | 0.08 ã |

- 1 – Output, 2 – Input,
- 3 – Input, 4 – No Connect,
- 5 – Common, 6 – Input,
- 7 – Input, 8 – No Connect

79L00AC Series

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^{\circ}\text{C}$)

| Rating | Symbol | Value | Unit |
|---|------------|--|--------------------|
| Input Voltage $V_o = -5\text{ V to }-9\text{ V}$ $V_o = -12\text{ V to }-15\text{ V}$ | V_i | -30 -35 | V |
| Output Current | I_o | 100 | mA |
| Maximum Power Dissipation Case KT-26 (TO-92) Z Suffix Case KT-47 (SOT-89) F Suffix Case 4303.8-1 (SO-8) D Suffix | P_D | 500 350 500 | mW |
| Junction Temperature | T_{JMAX} | 150 | $^{\circ}\text{C}$ |
| Operating Junction Temperature Range | T_{OPR} | -30 to +85 | $^{\circ}\text{C}$ |
| Storage Temperature Range | T_{STG} | -40 to +150 | $^{\circ}\text{C}$ |

ORDERING INFORMATION

| Device | Marking | Package | Quantity | Packing Style |
|--------------|-----------|---------|------------------------------------|--|
| 79LXXACZ* | 79LXXACZ* | SOT-54 | 1 Kpcs / plastic bags / carton box | In bulk |
| 79LXXACF* | 9LXX* | SOT-89 | 5 Kpcs / plastic bags / carton box | In bulk |
| 79LXXACF-T1* | 9LXX* | SOT-89 | 1 Kpcs / Reel | Embossed tape 12-mm wide 7" dia. Pin 2 (Common) towards the windung. Perforation on the right. |
| 79LXXACD* | 79LXXACD* | SO-8 | 5 Kpcs / plastic bags / carton box | In bulk |
| 79LXXACD-R1* | 79LXXACD* | SO-8 | 500 pcs / Reel | Embossed tape 12-mm wide 7" dia. Pin 1 (Output) face to perforation side of the tape. |
| 79LXXACD-R2* | 79LXXACD* | SO-8 | 2.5 Kpcs / Reel | Embossed tape 12-mm wide 13" dia. Pin 1 (Output) face to perforation side of the tape. |

Note 1:

XX indicates nominal voltage

*Available in -5, -6, -8, -9, -12 and -15 V devices.

79L00AC Series

79L05AC ELECTRICAL CHARACTERISTICS

($V_i = -10\text{ V}$, $I_o = 40\text{ mA}$, $C_i = 0.33\text{ }\mu\text{F}$, $C_o = 0.1\text{ }\mu\text{F}$, $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|----------------------------|--------------|-------------|------------------------|------|
| Output Voltage | V_o | -4.8 | -5.0 | -5.2 | V |
| Output Voltage, $-7.0\text{V} < V_i < -20.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | V_o | -4.75 | — | -5.25 | V |
| Line Regulation, $-7.0\text{V} < V_i < -20.0\text{V}$ | Reg_{line} | — | — | 150 | mV |
| Load Regulation, $1\text{mA} < I_o < 100\text{mA}$ $1\text{mA} < I_o < 40\text{mA}$ | Reg_{load} | — — | — — | 60 30 | mV |
| Input Bias Current | I_{IB} | — | — | 6 | mA |
| Input Bias Current, $-8.0\text{V} < V_i < -20.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | ΔI_{IB} | — | — | 1.5 | mA |
| Ripple Rejection, $-8.0\text{V} < V_i < -18.0\text{V}$, $I_o=40\text{mA}$, $f=120\text{Hz}$ | RR | 41 | — | — | dB |
| Dropout Voltage | $V_i - V_o$ | | 1.7 | — | V |

79L06AC ELECTRICAL CHARACTERISTICS

($V_i = -12\text{ V}$, $I_o = 40\text{ mA}$, $C_i = 0.33\text{ }\mu\text{F}$, $C_o = 0.1\text{ }\mu\text{F}$, $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------------------------|--------------|-------------|------------------------|------|
| Output Voltage | V_o | -5.75 | -6.0 | -6.25 | V |
| Output Voltage, $-8.5\text{V} < V_i < -20.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | V_o | -5.7 | — | -6.3 | V |
| Line Regulation, $-8.5\text{V} < V_i < -20.0\text{V}$ | Reg_{line} | — | — | 175 | mV |
| Load Regulation, $1\text{mA} < I_o < 100\text{mA}$ $1\text{mA} < I_o < 40\text{mA}$ | Reg_{load} | — — | — — | 80 40 | mV |
| Input Bias Current | I_{IB} | — | — | 6 | mA |
| Input Bias Current, $-9.0\text{V} < V_i < -20.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | ΔI_{IB} | — | — | 1.5 | mA |
| Ripple Rejection, $-10.0\text{V} < V_i < -20.0\text{V}$, $I_o=40\text{mA}$, $f=120\text{Hz}$ | RR | 40 | — | — | dB |
| Dropout Voltage | $V_i - V_o$ | | 1.7 | — | V |

79L00AC Series

79L08AC ELECTRICAL CHARACTERISTICS

($V_I = -14\text{ V}$, $I_O = 40\text{ mA}$, $C_I = 0.33\text{ }\mu\text{F}$, $C_O = 0.1\text{ }\mu\text{F}$, $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------------------------|-------------|-------------|------------------------|------|
| Output Voltage | V_O | -7.7 | -8.0 | -8.3 | V |
| Output Voltage, $-10.5\text{ V} < V_I < -23.0\text{ V}$, $1\text{ mA} < I_O < 40\text{ mA}$ | V_O | -7.6 | — | -8.4 | V |
| Line Regulation, $-10.5\text{ V} < V_I < -23.0\text{ V}$ | Reg_{line} | — | — | 175 | mV |
| Load Regulation, $1\text{ mA} < I_O < 100\text{ mA}$ $1\text{ mA} < I_O < 40\text{ mA}$ | Reg_{load} | — — | — — | 80 40 | mV |
| Input Bias Current | I_{IB} | — | — | 6 | mA |
| Input Bias Current, $-11.0\text{ V} < V_I < -23.0\text{ V}$, $1\text{ mA} < I_O < 40\text{ mA}$ | ΔI_{IB} | — | — | 1.5 | mA |
| Ripple Rejection, $-13.0\text{ V} < V_I < -23.0\text{ V}$, $I_O = 40\text{ mA}$, $f = 120\text{ Hz}$ | RR | 37 | — | — | dB |
| Dropout Voltage | $V_I - V_O$ | | 1.7 | — | V |

79L09AC ELECTRICAL CHARACTERISTICS

($V_I = -16\text{ V}$, $I_O = 40\text{ mA}$, $C_I = 0.33\text{ }\mu\text{F}$, $C_O = 0.1\text{ }\mu\text{F}$, $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------------------------|--------------|-------------|------------------------|------|
| Output Voltage | V_O | -8.6 | -9.0 | -9.4 | V |
| Output Voltage, $-12.0\text{ V} < V_I < -24.0\text{ V}$, $1\text{ mA} < I_O < 40\text{ mA}$ | V_O | -8.55 | — | -9.45 | V |
| Line Regulation, $-12.0\text{ V} < V_I < -24.0\text{ V}$ | Reg_{line} | — | — | 175 | mV |
| Load Regulation, $1\text{ mA} < I_O < 100\text{ mA}$ $1\text{ mA} < I_O < 40\text{ mA}$ | Reg_{load} | — — | — — | 90 40 | mV |
| Input Bias Current | I_{IB} | — | — | 6 | mA |
| Input Bias Current, $-13.0\text{ V} < V_I < -24.0\text{ V}$, $1\text{ mA} < I_O < 40\text{ mA}$ | ΔI_{IB} | — | — | 1.5 | mA |
| Ripple Rejection, $-15.0\text{ V} < V_I < -25.0\text{ V}$, $I_O = 40\text{ mA}$, $f = 120\text{ Hz}$ | RR | 37 | — | — | dB |
| Dropout Voltage | $V_I - V_O$ | | 1.7 | — | V |

79L00AC Series

79L12AC ELECTRICAL CHARACTERISTICS



($V_i = -19\text{ V}$, $I_o = 40\text{ mA}$, $C_i = 0.33\text{ }\mu\text{F}$, $C_o = 0.1\text{ }\mu\text{F}$, $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------------------------|--------------|--------------|-------------------------|------|
| Output Voltage | V_o | -11.5 | -12.0 | -12.5 | V |
| Output Voltage, $-14.0\text{V} < V_i < -27.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | V_o | -11.4 | — | -12.6 | V |
| Line Regulation, $-14.5\text{V} < V_i < -27.0\text{V}$ | Reg_{line} | — | — | 250 | mV |
| Load Regulation, $1\text{mA} < I_o < 100\text{mA}$ $1\text{mA} < I_o < 40\text{mA}$ | Reg_{load} | — — | — — | 100 50 | mV |
| Input Bias Current | I_{IB} | — | — | 6.5 | mA |
| Input Bias Current, $-16.0\text{V} < V_i < -27.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | ΔI_{IB} | — | — | 1.5 | mA |
| Ripple Rejection, $-15.0\text{V} < V_i < -25.0\text{V}$, $I_o=40\text{mA}$, $f=120\text{Hz}$ | RR | 37 | — | — | dB |
| Dropout Voltage | $V_i - V_o$ | | 1.7 | — | V |


79L15AC ELECTRICAL CHARACTERISTICS

($V_i = -23\text{ V}$, $I_o = 40\text{ mA}$, $C_i = 0.33\text{ }\mu\text{F}$, $C_o = 0.1\text{ }\mu\text{F}$, $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------------------------|---------------|--------------|-------------------------|------|
| Output Voltage | V_o | -14.4 | -15.0 | -15.6 | V |
| Output Voltage, $-17.5\text{V} < V_i < -30.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | V_o | -14.25 | — | -15.75 | V |
| Line Regulation, $-17.5\text{V} < V_i < -30.0\text{V}$ | Reg_{line} | — | — | 300 | mV |
| Load Regulation, $1\text{mA} < I_o < 100\text{mA}$ $1\text{mA} < I_o < 40\text{mA}$ | Reg_{load} | — — | — — | 150 75 | mV |
| Input Bias Current | I_{IB} | — | — | 6.5 | mA |
| Input Bias Current, $-19.0\text{V} < V_i < -30.0\text{V}$, $1\text{mA} < I_o < 40\text{mA}$ | ΔI_{IB} | — | — | 1.5 | mA |
| Ripple Rejection, $-18.5\text{V} < V_i < -28.5\text{V}$, $I_o=40\text{mA}$, $f=120\text{Hz}$ | RR | 34 | — | — | dB |
| Dropout Voltage | $V_i - V_o$ | | 1.7 | — | V |

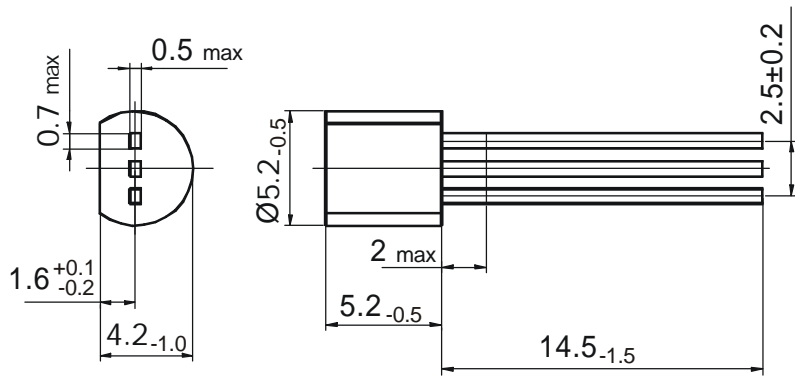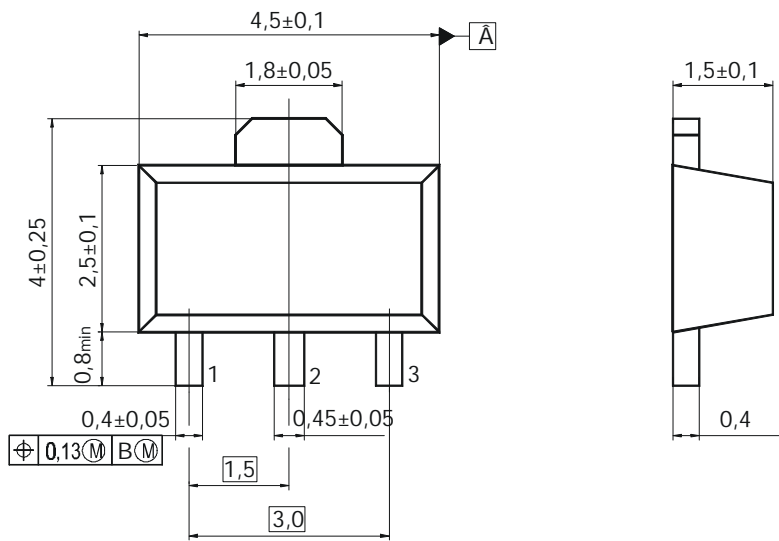**PLASTIC CASE KT-26****PLASTIC CASE KT-47**

PACKAGE DIMENSIONS of 79L00ACD in mm

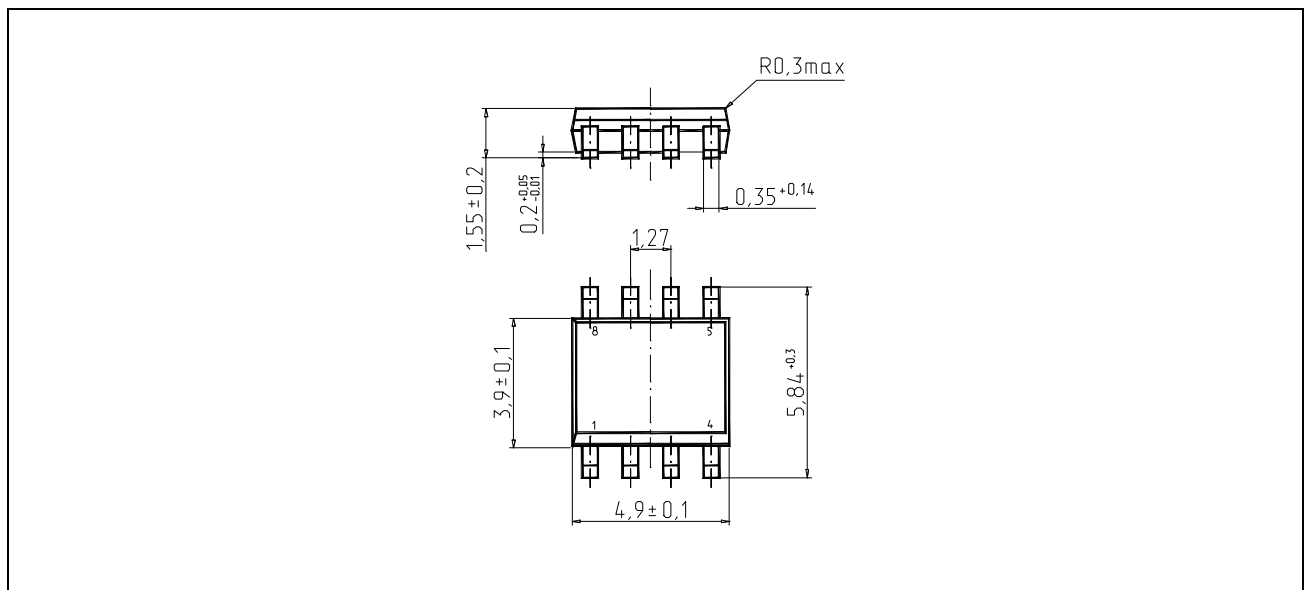

PLASTIC CASE 4303.8-1