

SNOA - SNOM

PRV : 50 - 1000 Volts

Io : 1.5 Amperes

FEATURES :


- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop

MECHANICAL DATA :

- * Case : SMA Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead Formed for Surface Mount
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.067 gram

SURFACE MOUNT RECTIFIERS

SMA (DO-214AC)

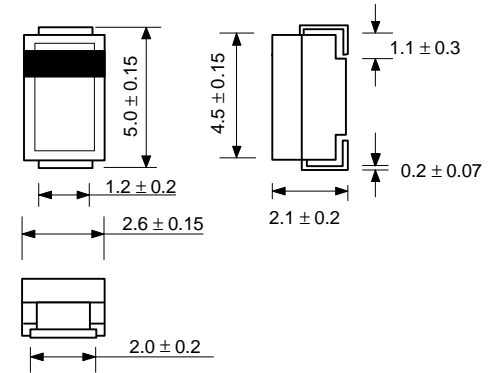

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| RATING | SYMBOL | SNOA | SNOB | SNOD | SNOE | SNOG | SNOH | SNOJ | SNOK | SNOM | UNIT |
|---|------------|---------------|------|------|------|------|------|------|------|------|------------------|
| Maximum Repetitive Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 210 | 280 | 350 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | V |
| Maximum Average Forward Current $T_a = 70^\circ\text{C}$ | I_F | 1.5 | | | | | | | | | A |
| Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method) | I_{FSM} | 50 | | | | | | | | | A |
| Maximum Forward Voltage at $I_F = 1.5$ Amps. | V_F | 1.4 | | | | | | | | | V |
| Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at rated DC Blocking Voltage $T_a = 100^\circ\text{C}$ | I_R | 5.0 | | | | | | | | | μA |
| | $I_{R(H)}$ | 50 | | | | | | | | | μA |
| Typical Junction Capacitance (Note1) | C_J | 30 | | | | | | | | | pF |
| Junction Temperature Range | T_J | - 65 to + 150 | | | | | | | | | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | - 65 to + 150 | | | | | | | | | $^\circ\text{C}$ |

Notes :

(1) Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc

RATING AND CHARACTERISTIC CURVES (SNOA - SNOM)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

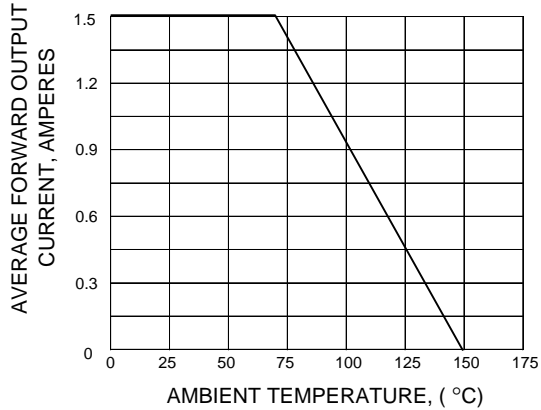


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

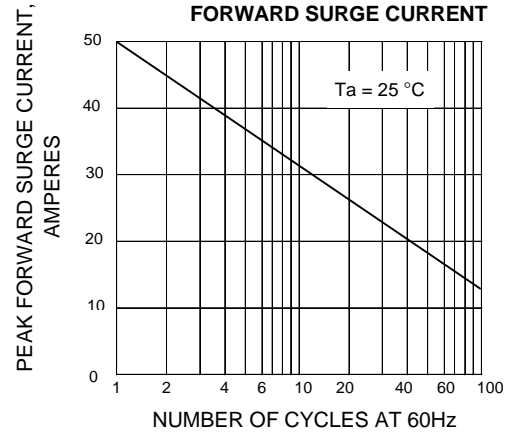


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

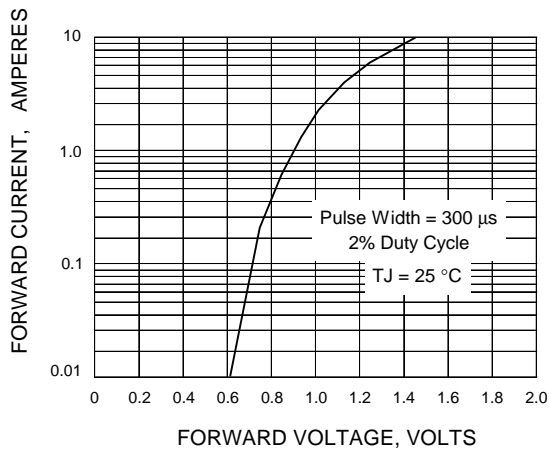


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

