

DIODE MODULE 150A/800V

PC1508 PD1508


FEATURES

- * Isolated Base
- * Dual Diodes Cathode Common and Cascaded Circuit
- * High Surge Capability
- * UL Recognized, File No. E187184


TYPICAL APPLICATIONS

- * Rectified For General Use



PC



PD



OUTLINE DRAWING

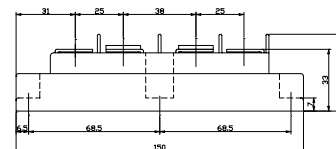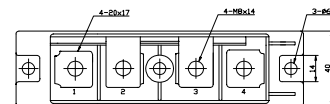

Maximum Ratings

Approx Net Weight:480g

| Parameter | Symbol | Type / Grade | Unit |
|--|------------------|-----------------|------|
| | | PC1508 / PD1508 | |
| Repetitive Peak Reverse Voltage *1 | V _{RRM} | 800 | V |
| Non Repetitive Peak Reverse Voltage *1 | V _{RSM} | 900 | |


| Parameter | | Symbol | Conditions | Max Rated Value | Unit |
|--------------------------------------|---------------|---------------------|---|-----------------|------------------|
| Average Rectified Output Current *1 | | I _{O(AV)} | 50 Hz Half Sine Wave condition T _c =103°C | 150 | A |
| RMS Forward Current *1 | | I _{F(RMS)} | | 235 | A |
| Surge Forward Current *1 | | I _{FSM} | 50 Hz Half Sine Wave, 1cycle, Non-Repetitive | 3200 | A |
| I Squared t *1 | | I ² t | 2msec to 10msec | 51200 | A ² s |
| Operating Junction Temperature Range | | T _{jw} | | -40 to +150 | °C |
| Storage Temperature Range | | T _{stg} | | -40 to +125 | °C |
| Isoration Voltage | | Viso | Base Plate to Terminals, AC1min | 2000 | V |
| Mounting Torque | Case Mounting | F _{tor} | M6 Screw | 2.5 to 3.5 | N.m |
| | Terminals | | M8 Screw | 9.0 to 10.0 | |

Electrical • Thermal Characteristics


| Characteristics | Symbol | Test Conditions | Max. | Unit |
|-------------------------|---------------|---|------|---------------|
| Peak Reverse Current *1 | I_{RM} | $V_{RM}= V_{RRM}$, $T_j= 150^{\circ}C$ | 15 | mA |
| Peak Forward Voltage *1 | V_{FM} | $I_{FM}= 450A$, $T_j=25^{\circ}C$ | 1.28 | V |
| Thermal Resistance *1 | $R_{th}(j-c)$ | Junction to Case | 0.25 | $^{\circ}C/W$ |
| | $R_{th}(c-f)$ | Case to Fin, Greased | 0.1 | |

*1: Value Per 1Arm


PC/PD1508 OUTLINE DRAWING (Dimensions in mm)

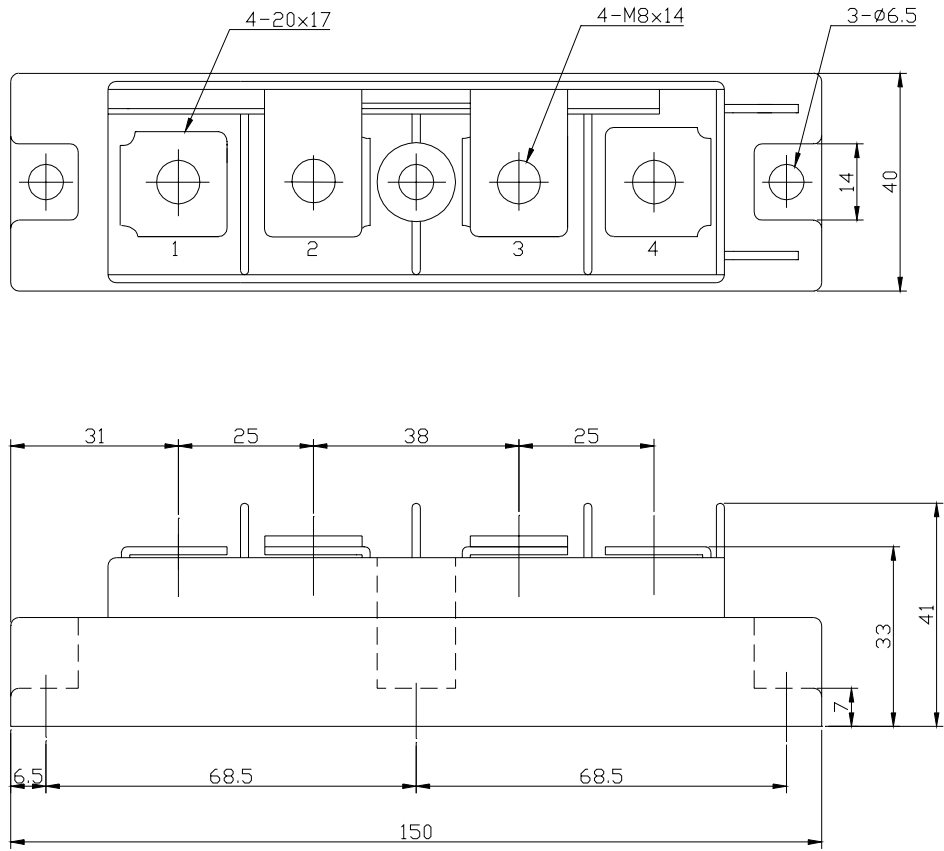


PC

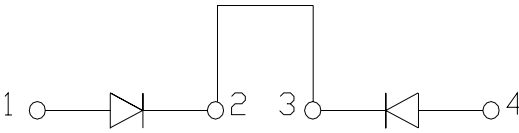


PD

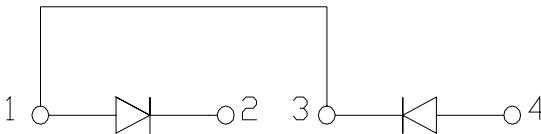


順電圧特性
FORWARD CURRENT VS. VOLTAGE

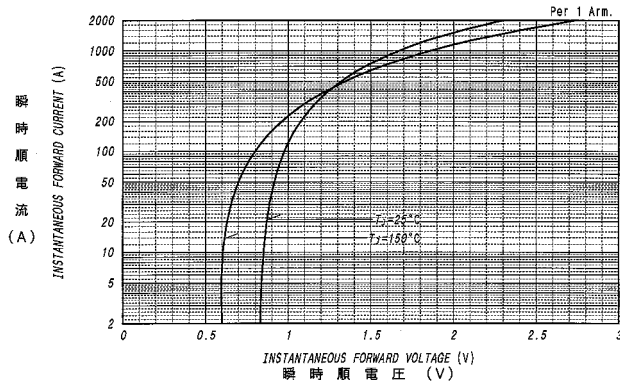


平均順電力損失特性
AVERAGE FORWARD POWER DISSIPATION

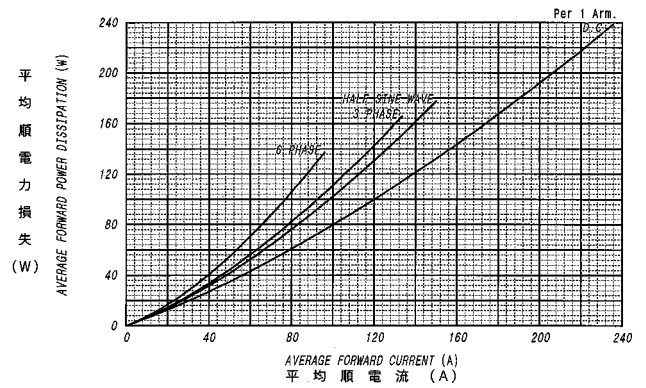

平均順電流 - ケース温度定格
AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

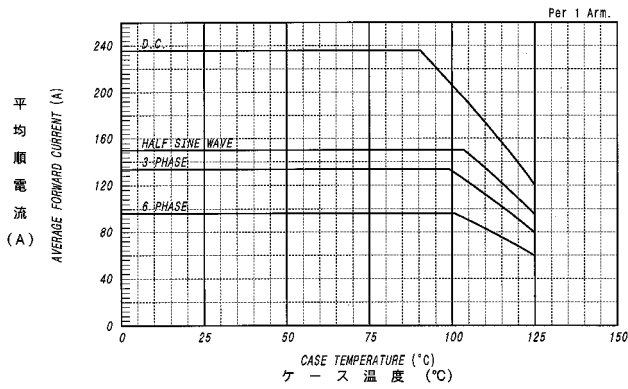

サージ順電流定格
SURGE CURRENT RATINGS

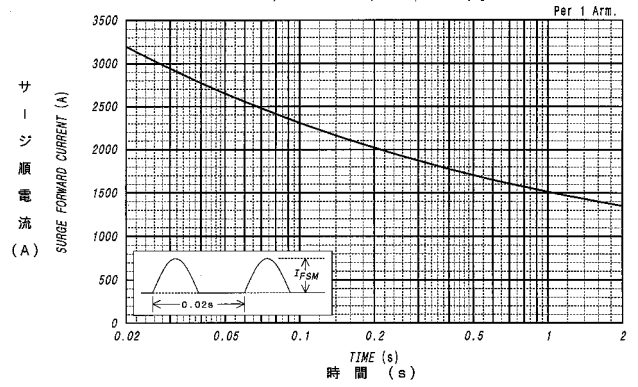

過渡熱抵抗特性
MAXIMUM TRANSIENT THERMAL IMPEDANCE
Junction to Case

