



Features

- Ultra low quiescent current: 4 μ A (typ.)
- High input voltage (up to 12V)
- Output voltage:
1.8V, 2.5V, 2.7V, 3.0V, 3.3V, 3.5V, 5.0V
- Output voltage accuracy: tolerance $\pm 3\%$
- Maximum output current: 250mA
- Low dropout voltage
- Low temperature coefficient
- TO-92, SOT-89 package

Applications

- Battery-powered equipment
- Voltage regulator for microprocessor
- Voltage regulator for LAN cards
- Wireless Communication equipment
- Audio/Video equipment

General Description

The HT73XX series is a set of three-terminal, low power, high voltage regulators implemented in CMOS technology. The series features extremely low quiescent current which is typically 4 μ A. They allow input voltages as high as 12V. The device provides large current with a significantly small dropout voltage.


The HT73XX consists of a high-precision voltage reference, an error correction circuit, and a current limited output driver. They are available with several fixed output voltages ranging from 1.8V to 5.0V. CMOS technology ensures low dropout voltage and low current consumption. Although designed primarily as fixed voltage regulators, these devices can be used with external components to generate variable voltages and currents.

Selection Table

| Part No. | Output Voltage | Tolerance | Package | Marking |
|----------|----------------|-----------|--------------------------------|---|
| HT7318 | 1.8V | $\pm 3\%$ | TO-92-A TO-92-B SOT-89-A | 73XX-A (for TO-92-A) 73XX-B (for TO-92-B) 73XX-A (for SOT-89) |
| HT7325 | 2.5V | $\pm 3\%$ | | |
| HT7327 | 2.7V | $\pm 3\%$ | | |
| HT7330 | 3.0V | $\pm 3\%$ | | |
| HT7333 | 3.3V | $\pm 3\%$ | | |
| HT7335 | 3.5V | $\pm 3\%$ | | |
| HT7350 | 5.0V | $\pm 3\%$ | | |


Note: "XX" stands for output voltages

Block Diagram

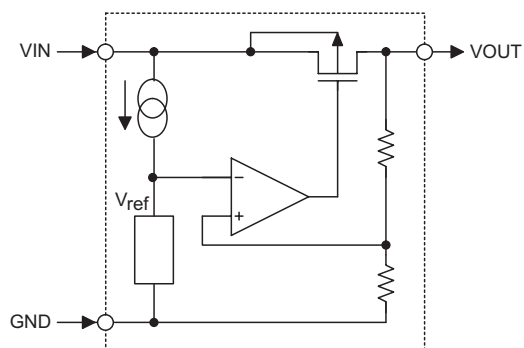


Pin Assignment

TO-92-A




Front View




Bottom View

TO-92-B




Front View



Bottom View

SOT-89-A



Absolute Maximum Ratings

Supply Voltage $V_{SS}-0.3V$ to $V_{SS}+14V$

Power Consumption (*1) 500mW

Power Consumption (*2) 500mW

Storage Temperature $-50^{\circ}C$ to $125^{\circ}C$

Operating Temperature $-40^{\circ}C$ to $85^{\circ}C$

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

*1: applied to TO-92

*2: applied to SOT-89

Electrical Characteristics
HT7318, +1.8V Output Type

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|-------|------|-------|--------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 2.8V | I _{OUT} =40mA | 1.746 | 1.8 | 1.854 | V |
| I _{OUT(MAX)} | Maximum Output Current | 2.8V | V _{OUT} ≥1.62V | 150 | — | — | mA |
| ΔV _{OUT} * | Load Regulator | 2.8V | 1mA≤I _{OUT} ≤80mA | — | 45 | 90 | mV |
| V _{DROP} ** | Dropout Voltage | — | I _{OUT} =40mA | — | 300 | — | mV |
| I _{SS} | Quiescent Current | 2.8V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | I _{OUT} =40mA 2.8V≤V _{IN} ≤12V | — | 0.2 | 0.3 | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 2.8V | I _{OUT} =40mA -40°C<Ta<85°C | — | ±0.7 | — | ppm/°C |

HT7325, +2.5V Output Type

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|-------|------|-------|--------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 3.5V | I _{OUT} =40mA | 2.425 | 2.5 | 2.575 | V |
| I _{OUT(MAX)} | Maximum Output Current | 3.5V | V _{OUT} ≥2.25V | 180 | — | — | mA |
| ΔV _{OUT} * | Load Regulator | 3.5V | 1mA≤I _{OUT} ≤80mA | — | 45 | 90 | mV |
| V _{DROP} ** | Dropout Voltage | — | I _{OUT} =40mA | — | 230 | — | mV |
| I _{SS} | Quiescent Current | 3.5V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | I _{OUT} =40mA 3.5V≤V _{IN} ≤12V | — | 0.2 | 0.3 | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 3.5V | I _{OUT} =40mA -40°C<Ta<85°C | — | ±0.7 | — | ppm/°C |

HT7327, +2.7V Output Type

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|-------|------|-------|--------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 3.7V | I _{OUT} =40mA | 2.619 | 2.7 | 2.781 | V |
| I _{OUT(MAX)} | Maximum Output Current | 3.7V | V _{OUT} ≥2.43V | 200 | — | — | mA |
| ΔV _{OUT} * | Load Regulator | 3.7V | 1mA≤I _{OUT} ≤100mA | — | 45 | 90 | mV |
| V _{DROP} ** | Dropout Voltage | — | I _{OUT} =40mA | — | 190 | — | mV |
| I _{SS} | Quiescent Current | 3.7V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | I _{OUT} =40mA 3.7V≤V _{IN} ≤12V | — | 0.2 | 0.3 | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 3.7V | I _{OUT} =40mA -40°C<Ta<85°C | — | ±0.7 | — | ppm/°C |

HT7330, +3.0V Output Type

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|------|------|------|--------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4V | I _{OUT} =40mA | 2.91 | 3 | 3.09 | V |
| I _{OUT(MAX)} | Maximum Output Current | 4V | V _{OUT} ≥2.7V | 250 | — | — | mA |
| ΔV _{OUT} * | Load Regulator | 4V | 1mA≤I _{OUT} ≤100mA | — | 45 | 90 | mV |
| V _{DROP} ** | Dropout Voltage | — | I _{OUT} =40mA | — | 160 | — | mV |
| I _{SS} | Quiescent Current | 4V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | I _{OUT} =40mA 4V≤V _{IN} ≤12V | — | 0.2 | 0.3 | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 4V | I _{OUT} =40mA -40°C<Ta<85°C | — | ±0.7 | — | ppm/°C |

HT7333, +3.3V Output Type

Ta=25°C

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|-------|------|-------|--------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4.3V | I _{OUT} =40mA | 3.201 | 3.3 | 3.399 | V |
| I _{OUT(MAX)} | Maximum Output Current | 4.3V | V _{OUT} ≥2.97V | 250 | — | — | mA |
| ΔV _{OUT} * | Load Regulator | 4.3V | 1mA≤I _{OUT} ≤100mA | — | 45 | 90 | mV |
| V _{DROP} ** | Dropout Voltage | — | I _{OUT} =40mA | — | 150 | — | mV |
| I _{SS} | Quiescent Current | 4.3V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | I _{OUT} =40mA 4.3V≤V _{IN} ≤12V | — | 0.2 | 0.3 | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 4.3V | I _{OUT} =40mA -40°C<Ta<85°C | — | ±0.7 | — | ppm/°C |

HT7335, +3.5V Output Type

Ta=25°C


| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|-------|------|-------|--------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 4.5V | I _{OUT} =40mA | 3.395 | 3.5 | 3.605 | V |
| I _{OUT(MAX)} | Maximum Output Current | 4.5V | V _{OUT} ≥3.15V | 250 | — | — | mA |
| ΔV _{OUT} * | Load Regulator | 4.5V | 1mA≤I _{OUT} ≤100mA | — | 45 | 90 | mV |
| V _{DROP} ** | Dropout Voltage | — | I _{OUT} =40mA | — | 140 | — | mV |
| I _{SS} | Quiescent Current | 4.5V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | I _{OUT} =40mA 4.5V≤V _{IN} ≤12V | — | 0.2 | 0.3 | %/V |
| V _{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 4.5V | I _{OUT} =80mA -40°C<Ta<85°C | — | ±0.7 | — | ppm/°C |

HT7350, +5.0V Output Type
 $T_a = 25^{\circ}\text{C}$

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|---|-------------------------|-----------------|---|------|-----------|------|-------------------------|
| | | V_{IN} | Conditions | | | | |
| V_{OUT} | Output Voltage | 6V | $I_{OUT} = 40\text{mA}$ | 4.85 | 5 | 5.15 | V |
| $I_{OUT(MAX)}$ | Maximum Output Current | 6V | $V_{OUT} \geq 4.5\text{V}$ | 250 | — | — | mA |
| ΔV_{OUT}^* | Load Regulator | 6V | $1\text{mA} \leq I_{OUT} \leq 100\text{mA}$ | — | 45 | 90 | mV |
| V_{DROP}^{**} | Dropout Voltage | — | $I_{OUT} = 40\text{mA}$ | — | 100 | — | mV |
| I_{SS} | Quiescent Current | 6V | No load | — | 4 | 8 | μA |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | Line Regulator | — | $I_{OUT} = 40\text{mA}$ $6\text{V} \leq V_{IN} \leq 12\text{V}$ | — | 0.2 | 0.3 | %/V |
| V_{IN} | Input Voltage | — | — | — | — | 12 | V |
| $\frac{\Delta V_{OUT}}{\Delta T_a}$ | Temperature Coefficient | 6V | $I_{OUT} = 80\text{mA}$ $-40^{\circ}\text{C} < T_a < 85^{\circ}\text{C}$ | — | ± 0.7 | — | ppm/ $^{\circ}\text{C}$ |


Note: "*" Regulation is measured at constant junction temperature, using pulsed ON time.

**" Dropout is measured at constant junction temperature, using pulsed ON time, and the criterion is V_{OUT} inside target value $\pm 2\%$.

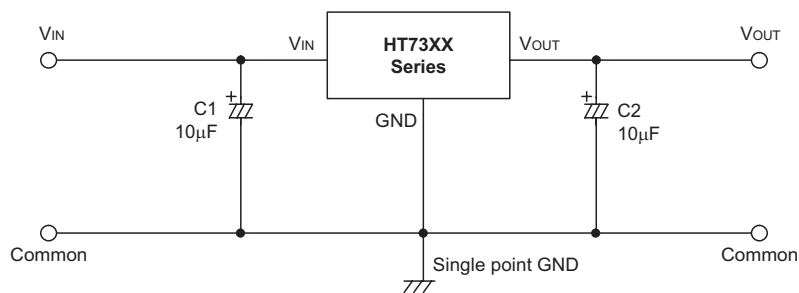
Application Circuits


Package Information

3-pin TO-92 Outline Dimensions

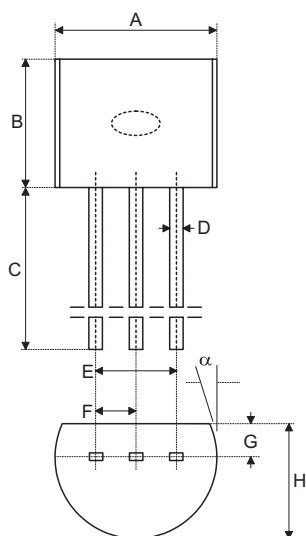



| Symbol | Dimensions in mil | | |
|----------|-------------------|------|------|
| | Min. | Nom. | Max. |
| A | 170 | — | 200 |
| B | 170 | — | 200 |
| C | 500 | — | — |
| D | 11 | — | 20 |
| E | 90 | — | 110 |
| F | 45 | — | 55 |
| G | 45 | — | 65 |
| H | 130 | — | 160 |
| I | 8 | — | 18 |
| α | 4° | — | 6° |

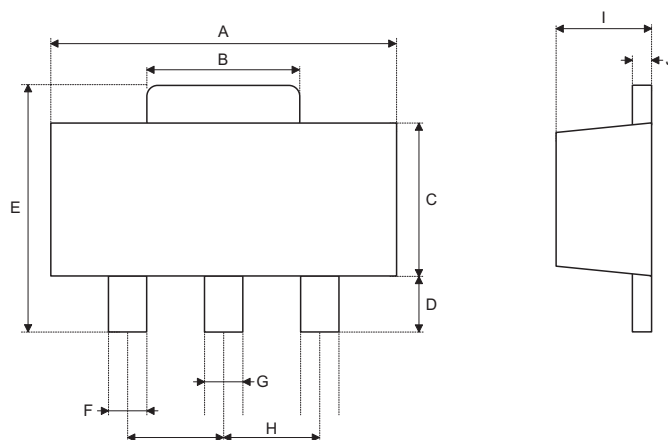3-pin SOT-89 Outline Dimensions


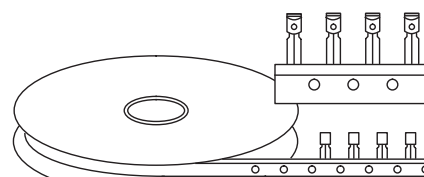
| Symbol | Dimensions in mil | | |
|--------|-------------------|------|------|
| | Min. | Nom. | Max. |
| A | 173 | — | 181 |
| B | 64 | — | 72 |
| C | 90 | — | 102 |
| D | 35 | — | 47 |
| E | 155 | — | 167 |
| F | 14 | — | 19 |
| G | 17 | — | 22 |
| H | — | 59 | — |
| I | 55 | — | 63 |
| J | 14 | — | 17 |

Product Tape and Reel Specifications


TO-92 Reel Dimensions (Unit: mm)

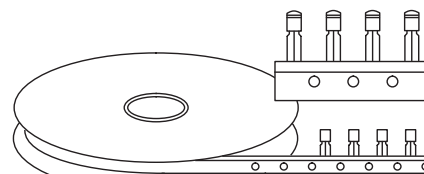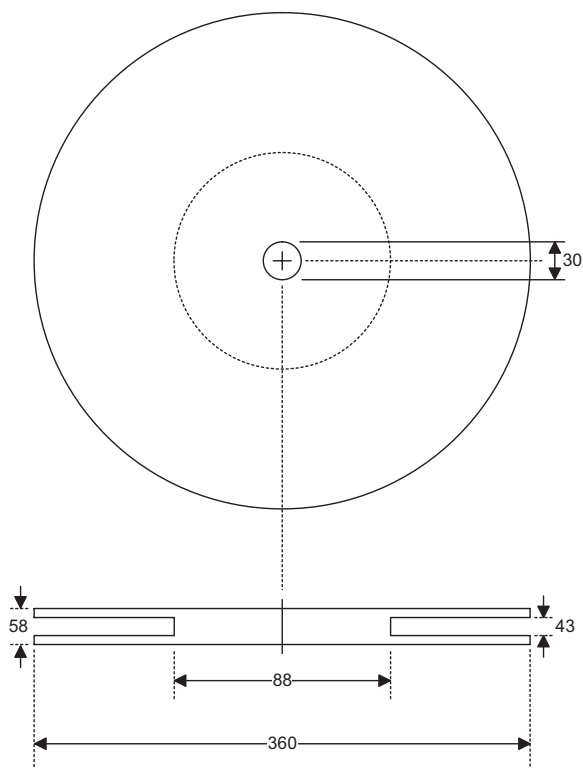


Package Up, Flat Side Up



Package Up, Flat Side Down

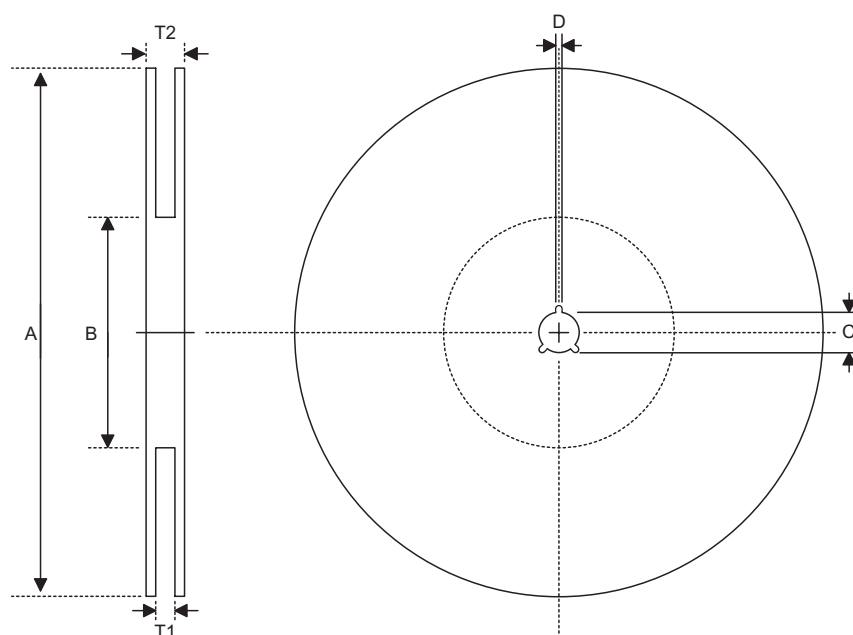SOT-89 Reel Dimensions

SOT-89
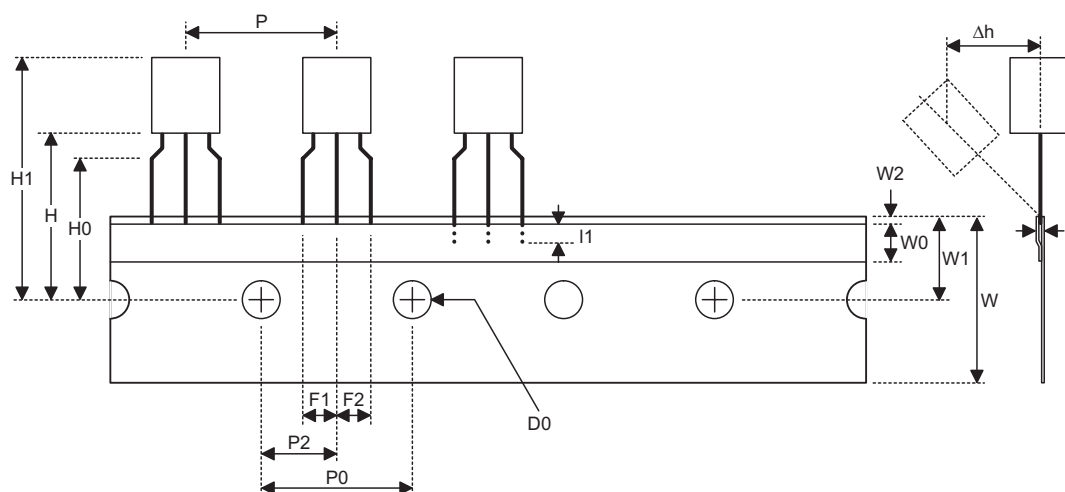
| Symbol | Description | Dimensions in mm |
|--------|-----------------------|------------------|
| A | Reel Outer Diameter | 180±1.0 |
| B | Reel Inner Diameter | 62±1.5 |
| C | Spindle Hole Diameter | 12.75+0.15 |
| D | Key Slit Width | 1.9±0.15 |
| T1 | Space Between Flange | 12.4+0.2 |
| T2 | Reel Thickness | 17-0.4 |


TO-92 Carrier Tape Dimensions

TO-92

| Symbol | Description | Dimensions in mm |
|----------------|---|------------------|
| l ₁ | Taped Lead Length | (2.5) |
| P | Component Pitch | 12.7±1.0 |
| P ₀ | Perforation Pitch | 12.7±0.3 |
| P ₂ | Component to Perforation (Length Direction) | 6.35±0.4 |
| F ₁ | Lead Spread | 2.5+0.4 -0.1 |
| F ₂ | Lead Spread | 2.5+0.4 -0.1 |
| Δh | Component Alignment | 0±0.1 |
| W | Carrier Tape Width | 18.0+1.0 -0.5 |
| W ₀ | Hold-down Tape Width | 6.0±0.5 |
| W ₁ | Perforation Position | 9.0±0.5 |
| W ₂ | Hold-down Tape Position | (0.5) |
| H ₀ | Lead Clinch Height | 16.0±0.5 |
| H ₁ | Component Height | Less than 24.7 |
| D ₀ | Perforation Diameter | 4.0±0.2 |
| t | Taped Lead Thickness | 0.7±0.2 |
| H | Component Base Height | 19.0±0.5 |

Note: Thickness less than 0.38±0.05mm~0.5mm

P₀ Accumulated pitch tolerance: ±1mm/20pitches.

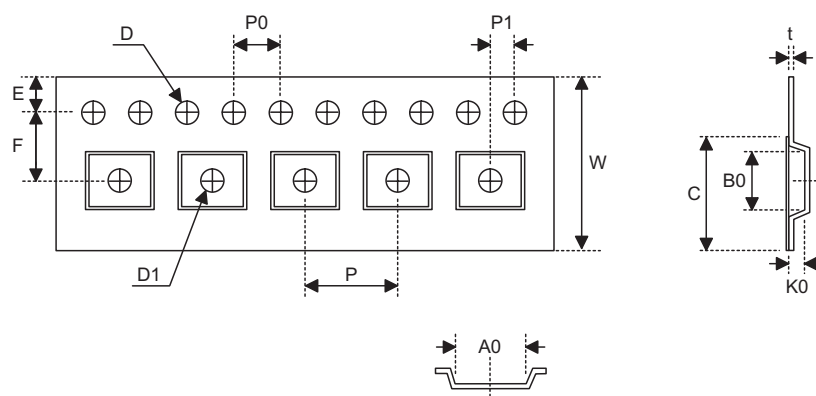() Bracketed figures are for consultation only

SOT-89 Carrier Tape Dimensions

SOT-89

| Symbol | Description | Dimensions in mm |
|--------|--|------------------|
| W | Carrier Tape Width | 12.0+0.3 -0.1 |
| P | Cavity Pitch | 8.0±0.1 |
| E | Perforation Position | 1.75±0.1 |
| F | Cavity to Perforation (Width Direction) | 5.5±0.05 |
| D | Perforation Diameter | 1.5+0.1 |
| D1 | Cavity Hole Diameter | 1.5+0.1 |
| P0 | Perforation Pitch | 4.0±0.1 |
| P1 | Cavity to Perforation (Length Direction) | 2.0±0.10 |
| A0 | Cavity Length | 4.8±0.1 |
| B0 | Cavity Width | 4.5±0.1 |
| K0 | Cavity Depth | 1.8±0.1 |
| t | Carrier Tape Thickness | 0.30±0.013 |
| C | Cover Tape Width | 9.3 |

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189
<http://www.holtek.com.tw>

Holtek Semiconductor Inc. (Taipei Sales Office)

4F-2, No. 3-2, YuanQu St., Nankang Software Park, Taipei 115, Taiwan
Tel: 886-2-2655-7070
Fax: 886-2-2655-7373
Fax: 886-2-2655-7383 (International sales hotline)

Holtek Semiconductor Inc. (Shanghai Sales Office)

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China 200233
Tel: 021-6485-5560
Fax: 021-6485-0313
<http://www.holtek.com.cn>

Holtek Semiconductor Inc. (Shenzhen Sales Office)

43F, SEG Plaza, Shen Nan Zhong Road, Shenzhen, China 518031
Tel: 0755-8346-5589
Fax: 0755-8346-5590
ISDN: 0755-8346-5591

Holtek Semiconductor Inc. (Beijing Sales Office)

Suite 1721, Jinyu Tower, A129 West Xuan Wu Men Street, Xicheng District, Beijing, China 100031
Tel: 010-6641-0030, 6641-7751, 6641-7752
Fax: 010-6641-0125

Holmate Semiconductor, Inc. (North America Sales Office)

46712 Fremont Blvd., Fremont, CA 94538
Tel: 510-252-9880
Fax: 510-252-9885
<http://www.holmate.com>

Copyright © 2004 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.