

**Specification Status: Released**


**Maximum Electrical Rating**

**Voltage: 6.0V<sub>DC</sub>**  
**Short Circuit Current: 100A**

**Notes:**


1. All terminations are tin plated.
2. Drawing not to scale

**Marking:**



PART IDENTIFICATION

MANUFACTURER'S MARK

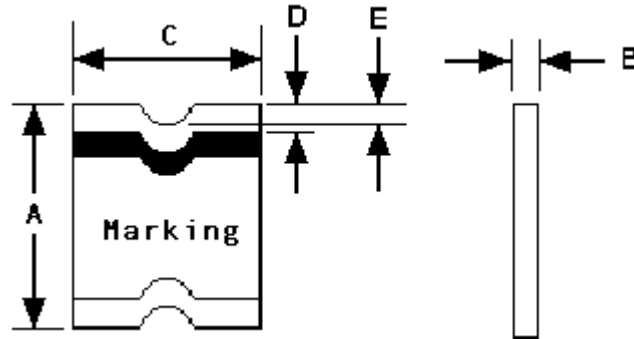

**TABLE I. DIMENSIONS:**

	A		B		C		D		E
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
mm:	3.00	3.43	0.79	1.17	2.35	2.80	0.25	0.75	0.076
in:	(0.118)	(0.135)	(0.031)	(0.046)	(0.092)	(0.110)	(0.010)	(0.030)	(0.003)

**TABLE II. PERFORMANCE RATINGS:**

CURRENT RATINGS**						TIME TO TRIP**	RESISTANCE VALUES		TRIPPED-STATE POWER DISSIPATION**
AMPERES AT 0°C		AMPERES AT 20°C		AMPERES AT 60°C		SECONDS AT 20°C, 8.0A	OHMS AT 20°C		WATTS AT 20°C, 6.0V
HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MAX	MIN	MAX*	MAX
2.35	4.7	2.0	4.0	1.5	3.0	2.5	0.02	0.06	0.8

\* Maximum resistance is measured 1 hour after reflow.

\*\* Values specified were determined using PCB's with 0.030" x 1.5 ounce copper traces.

Agency Recognition: UL, CSA, TUV  
Reference Documents: PS300  
Precedence: This specification takes precedence over documents referenced herein.  
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

**ROHS Compliant**

Directive 2002/95/EC  
Compliant

**ELV Compliant**

Directive 2000/53/EC  
Compliant

**Pb-Free**



**Halogen Free\***



\* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm