

## IGBT MODULE ( P-Series )


### ■ Features

- Square SC SOA at  $10 \times I_C$
- Simplified Parallel Connection
- Narrow Distribution of Characteristics
- High Short Circuit Withstand-Capability

### ■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

## ■ Outline Drawing

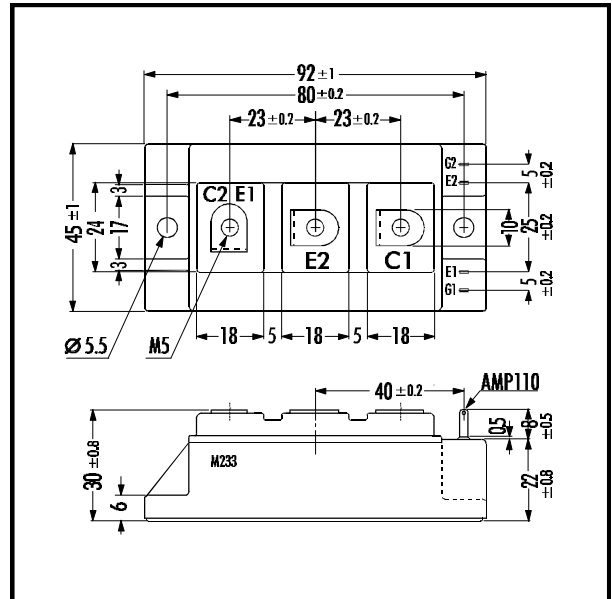


## ■ Maximum Ratings and Characteristics

### • Absolute Maximum Ratings ( $T_c=25^\circ\text{C}$ )

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	$V_{CES}$	1400	V
Gate -Emitter Voltage	$V_{GES}$	$\pm 20$	V
Collector Current	Continuous $T_c=25^\circ\text{C}$	$I_C$	150
		$I_C$	100
	1ms $T_c=80^\circ\text{C}$	$I_C$ PULSE	300
		$-I_C$	200
		$-I_C$ PULSE	100
Max. Power Dissipation	$P_C$	780	W
Operating Temperature	$T_j$	+150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 ~ +125	$^\circ\text{C}$
Isolation Voltage	A.C. 1min. $V_{is}$	2500	V
Screw Torque	Mounting *1	3.5	Nm
	Terminals *2	3.5	

Note: \*1:Recommendable Value; 2.5 - 3.5 Nm (M5)

## ■ Equivalent Circuit






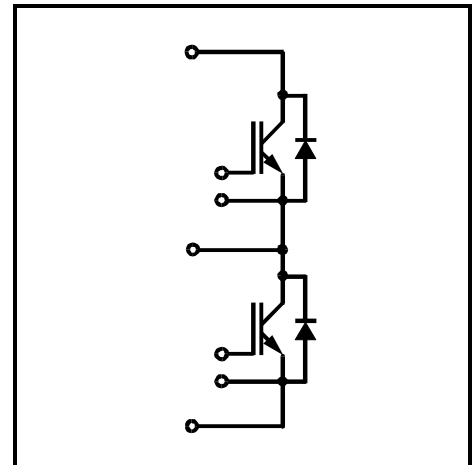








### • Electrical Characteristics ( at $T_j=25^\circ\text{C}$ )



Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	$I_{CES}$	$V_{GE}=0V$ $V_{CE}=1400V$			2.0	mA
Gate-Emitter Leakage Current	$I_{GES}$	$V_{CE}=0V$ $V_{GE}=\pm 20V$			400	$\mu\text{A}$
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=100\text{mA}$	6.0	8.0	9.0	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$T_j=25^\circ\text{C}$ $V_{GE}=15V$ $I_C=100A$		2.7	3.0	V
		$T_j=125^\circ\text{C}$ $V_{GE}=15V$ $I_C=100A$		3.3		
Input capacitance	$C_{ies}$	$V_{GE}=0V$		10000		pF
Output capacitance	$C_{oes}$	$V_{CE}=10V$		1500		
Reverse Transfer capacitance	$C_{res}$	$f=1\text{MHz}$		650		
Turn-on Time	$t_{ON}$	$V_{CC}=600V$ $I_C=100A$			1.2	$\mu\text{s}$
					0.6	
Turn-off Time	$t_{OFF}$	$V_{GE}=\pm 15V$ $R_G=9.1\Omega$			1.0	$\mu\text{s}$
					0.3	
Diode Forward On-Voltage	$V_F$	$I_F=100A$ $V_{GE}=0V$		2.4	3.3	V
Reverse Recovery Time	$t_{rr}$	$I_F=100A$			350	ns

### • Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(f-c)}$	IGBT			0.16	$^\circ\text{C/W}$
	$R_{th(f-c)}$	Diode			0.33	
	$R_{th(c-f)}$	With Thermal Compound		0.025		

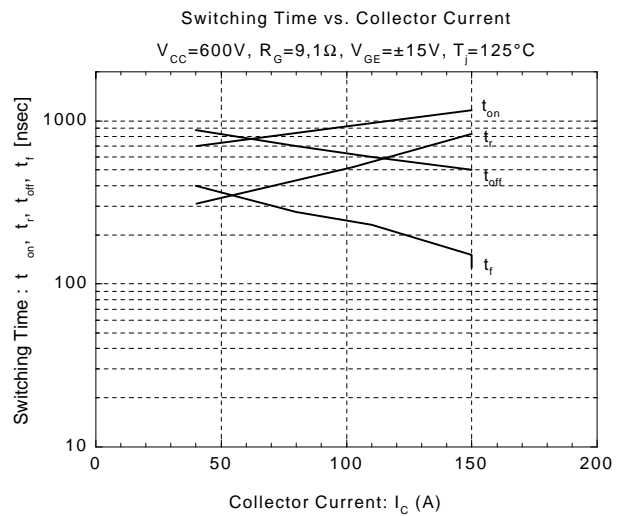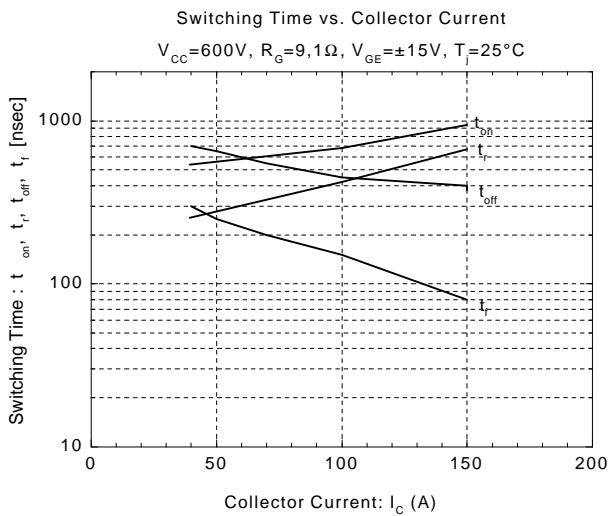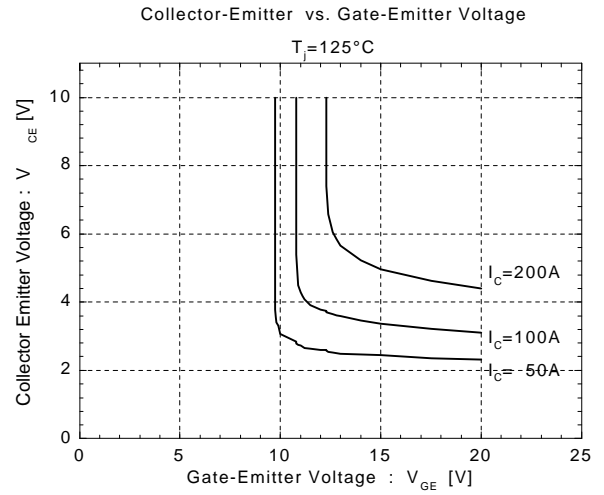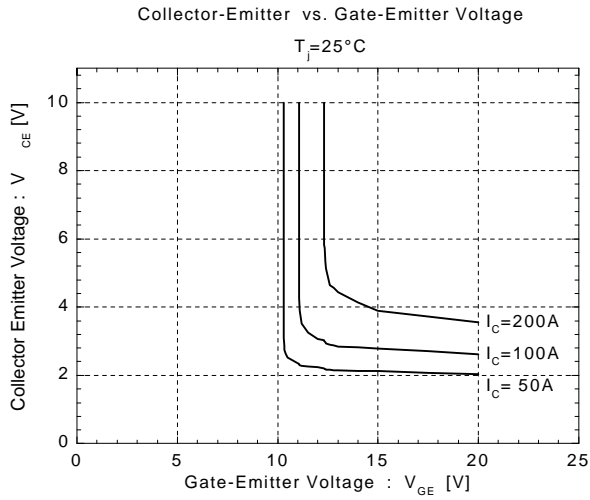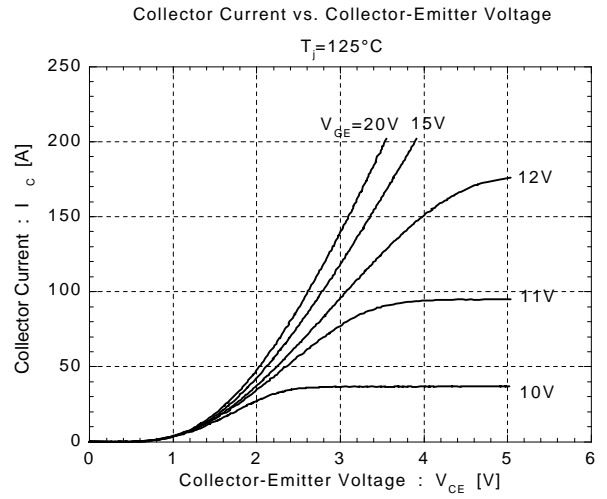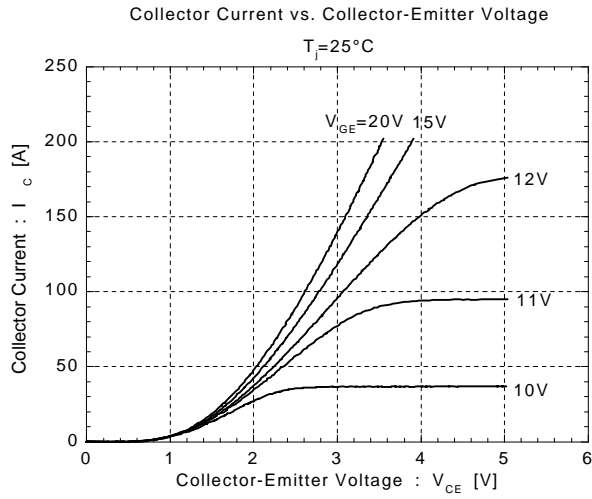

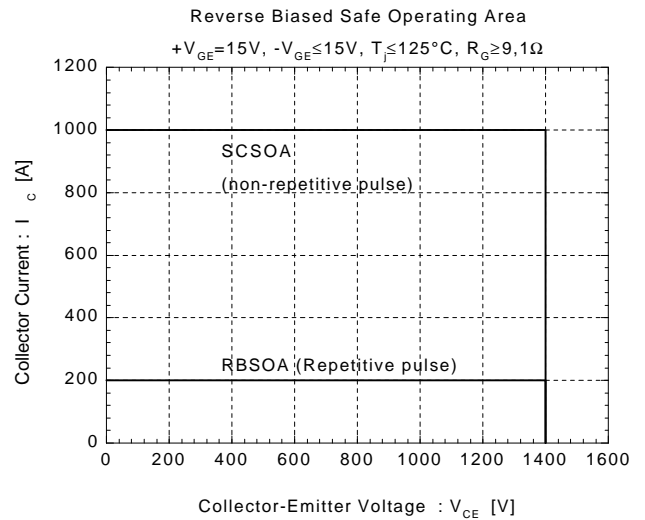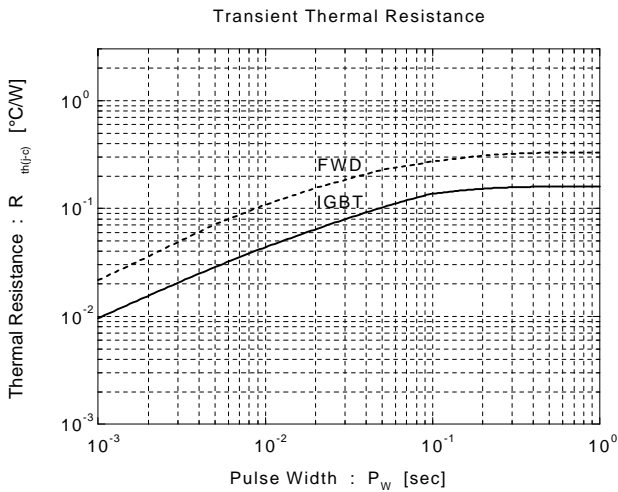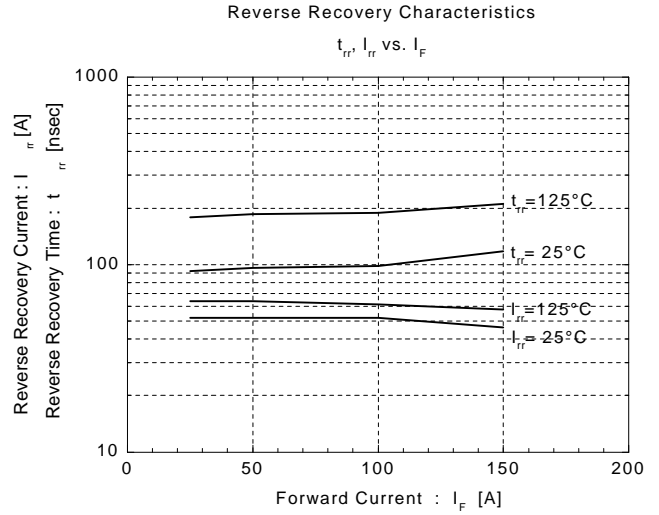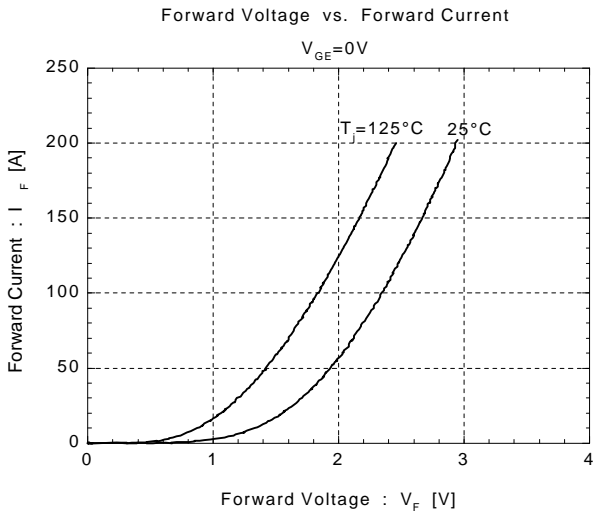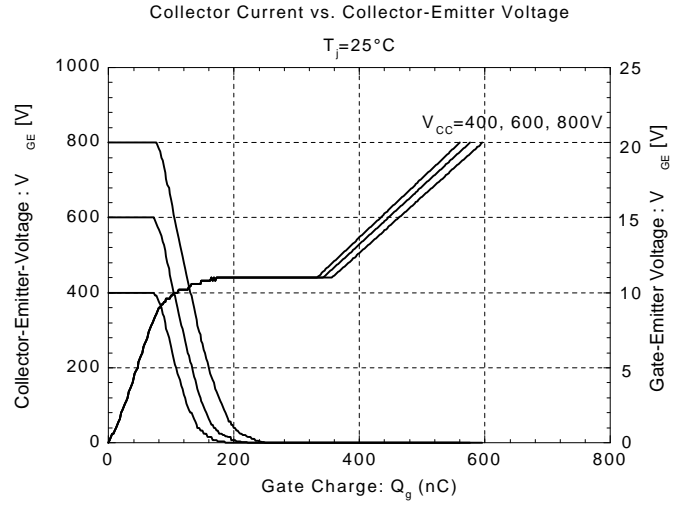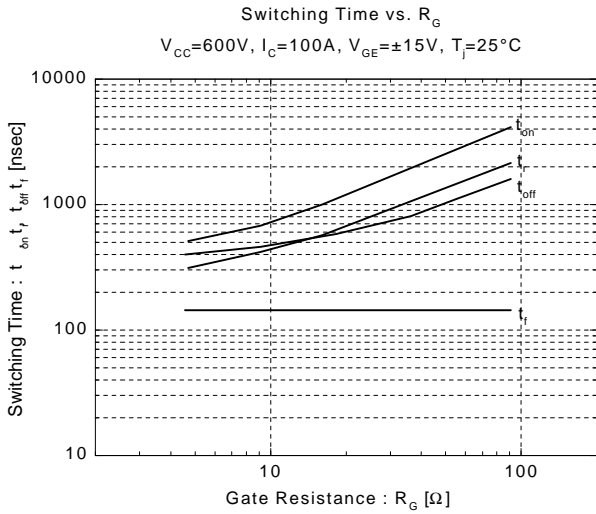

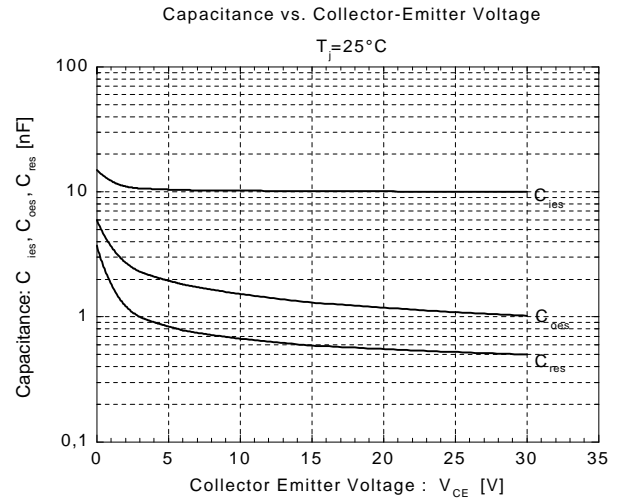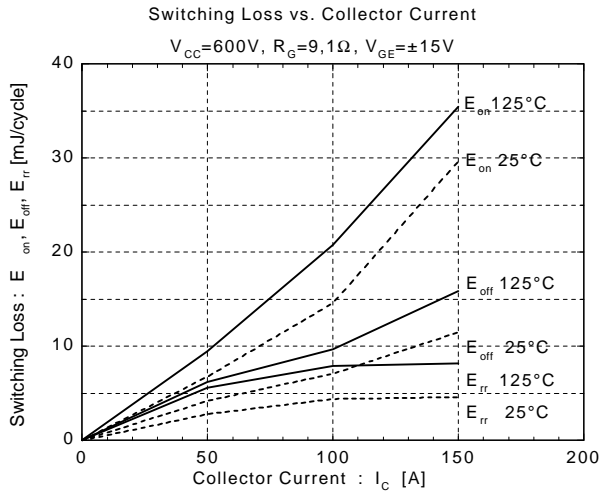

以上产品全新原装进口，有现货，直接代理商，有价格优势，100%全新原装

深圳市嘉林电子有限公司 欧阳 13502822457 0755-25981289 QQ:527328927

