




深圳市浪拓電子技術有限公司  
ShenZhen LangTuo Electronic Technology CO., LTD

陶瓷气体放电管 (GDT) >> 低脉冲二放电管

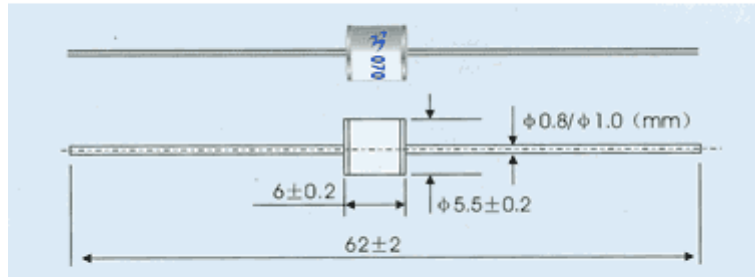

**LT φ5.5×6, 5KA**

Part Number	DC Spark-over	Impulse	Minimum Insulation		Maximum	Impulse Discharge	Impulse Discharge Voltage
	Voltage	Life Test	Resistance		Capacitance	Current	
	(V)	8/20 μs 100A (Times)	Test Voltage DC (V)	(MΩ)	(1MHz 1V) (pF)	8/20 μs (A)	
LT-B5G090L	90 ± 20%	100	50	100	0.5	5000	10/700 μs 4kV ±5 Times
LT-B5G230L	230 ± 20%	100	100	100	0.5	5000	
LT-B5G300L	300 ± 20%	100	100	100	0.5	5000	
LT-B5G350L	350 ± 20%	100	100	100	0.5	5000	
LT-B5G400L	400 ± 20%	100	100	100	0.5	5000	
LT-B5G420L	420 ± 20%	100	100	100	0.5	5000	
LT-B5G470L	470 ± 20%	100	100	100	0.5	5000	
LT-B5G600L	600 ± 20%	100	100	100	0.5	5000	
LT-B5G800L	800 ± 20%	100	100	100	0.5	5000	
LT-B5G1000L	1000 ± 20%	100	100	100	0.5	5000	