



# 801H



## »» Features

- Miniature PCB surge cube relay.
- High rating 10A/250VAC/30VDC & TV-8.
- Reverse contact terminal position version is available.
- Optional for sealed flux free & sealed washable types.
- Comply with RoHS-Directive 2002/95/EC.

## »» Type List

Terminal style	Contact form	UL Insulation system approval	Designation (provided with)		
			Flux tight		Sealed type washable
PCB terminal	1C (SPDT)	-----	801H-1C-C		801H-1C-S
		F	801H-1C-C FXXVDC		801H-1C-S FXXVDC
	1A (SPNO)	-----	801H-1A-C		801H-1A-S
		F	801H-1A-C FXXVDC		801H-1A-S FXXVDC

## »» Ordering Information

801   H   -   1A   -   C   FXXVDC

1   2   3   4   5

- |                                    |                           |
|------------------------------------|---------------------------|
| 1. 801 -- Basic series designation | 4. C -- Flux tight        |
| 2. H -- High power type            | S -- Sealed type washable |
| 3. 1A -- Single pole normally open | 5. Blank -- Standard type |
| 1B -- Single pole normally closed  | F -- Class F              |
| 1C -- Single pole double throw     |                           |

## »» Contact Rating

Resistive load	12A 125VAC <sup>(*)</sup> ; 10A 250VAC ; 10A 30VDC
----------------	--

## »» Coil Rating (DC)

Rated voltage (V)	Rated current ±10 % at 23°C (mA)	Coil resistance ±10 % at 23°C (Ω)	Max. continuous voltage at 85°C	Pick up voltage(Max) at 23°C	Drop out voltage(Min) at 23°C	Power consumption at rated voltage
3	120	25	160 % of rated voltage	75 % of rated voltage	10 % of rated voltage	approx. 0.36W
5	73	69				
6	60	100				
9	40	225				
12	30	400				
18	20	900				
24	15	1600				
48	7.5	6400				
60	6	10000				

### »» Specification

Contact material	AgSnO alloy	
Contact resistance <sup>(1)</sup>	50mΩ Max.	
Operate time <sup>(1)</sup>	15ms Max.	
Release time <sup>(1)</sup>	5ms Max.	
Insulation resistance <sup>(1)</sup>	100 MΩ Min. (DC 500V)	
Dielectric strength <sup>(1)</sup>	Between open contact	: AC 750V , 50/60Hz 1 min.
	Between contact and coil	: AC 1500V , 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~50Hz , amplitude 1.0 mm
	Damage limits	10~50Hz , amplitude 1.0 mm
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (※50,000 operations) (frequency 1,200 operations/hr)
Operating ambient temperature	-40~+85°C (no freezing)	
Weight	Approx. 16 g	

Note : (1) initial value



### »» Safety Approval

Certified	UL / CUL	CSA	TUV
File No.	E88991	1474287	R09352399

### »» Safety Approval Rating

UL / CUL	CSA	TUV
15A 125VAC	15A 125VAC	10A 250VAC
10A 250VAC	10A 250VAC	12A 125VAC
10A 30VDC	10A 30VDC	10A 30VDC
1/2HP 125/250VAC	1/2HP 125/250VAC	
TV-3	TV-3	
TV-8 (for 1A)	TV-8 (for 1A)	


### »» Outline Dimensions






# 801H

## »» Wiring Diagram BOTTOM VIEW

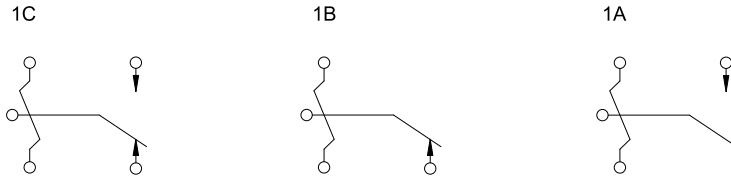

## »» PC Board Layout BOTTOM VIEW



## »» Engineering Data

