

mm inch

**RoHS Directive compatibility information**  
<http://www.nais-e.com/>

### FEATURES

**1. Slim type: Width 7 mm .276 inch.**

20.3(L)×7.0(W)×15.0(H) mm  
 .799(L)×.276(W)×.591(H) inch

**2. Perfect for small load switching of home appliances**

10<sup>5</sup> switching operations possible with a 3A 250V AC resistive load.

**3. Low operating power**

Compact size, nominal operating power as low as 200mW.

**4. High shock resistance**

The relay withstands a functional shock resistance of 300m/s<sup>2</sup> [approx. 30 G more]

**5. High insulation resistance**

• Creepage distance and clearances between contact and coil: Min. 6 mm .236 inch (In compliance with IEC65)

• Surge withstand voltage between contact and coil: 10,000 V or more.

**6. UL/CSA, VDE, TÜV approved.**

### SPECIFICATIONS

#### Contact

Arrangement	1 Form A		
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)	Max. 100 mΩ		
Contact material	AgSnO <sub>2</sub> type		
Rating (resistive load)	Nominal switching capacity	3 A 277 V AC, 3 A 30V DC	
	Max. switching power	831 V A (AC), 90W (DC)	
	Max. switching voltage	277 V AC, 30 V DC	
	Max. switching current	3 A	
	Min. switching capacity#1	100 mA, 5 V DC	
Expected life (min. operations)	Mechanical (at 180 cpm)	5×10 <sup>6</sup>	
	Electrical (at 20 cpm) (at rated load)	3A 125V AC, 3A 30V DC	2×10 <sup>5</sup>
		3A 250V AC	10 <sup>5</sup>

#### Coil

Nominal operating power	200 mW
-------------------------	--------

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*1 Measurement at same location as "Initial breakdown voltage" section.
- \*2 Detection current: 10mA
- \*3 Wave is standard shock voltage of ±1.2×50ms according to JEC-212-1981
- \*4 Excluding contact bounce time.
- \*5 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs
- \*6 Half-wave pulse of sine wave: 6 ms
- \*7 Detection time: 10 μs
- \*8 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

#### Characteristics

Max. operating speed	20 cpm (at rated load)	
Initial insulation resistance*1	Min. 1,000 MΩ (at 500 V DC)	
Initial*2 breakdown voltage	Between open contacts	750 Vrms for 1 min.
	Between contact and coil	4,000 Vrms for 1 min.
Initial surge voltage between contact and coil*3	Min. 10,000 V	
Operate time*4 (at nominal voltage)	Max. 10ms (at 20°C 68°F)	
Release time (with diode)*4 (at nominal voltage)	Max. 10ms (at 20°C 68°F)	
Temperature rise (at 70°C 158°F)	Max. 45°C with nominal coil voltage and at 3 A contact carrying current (resistance method)	
Shock resistance	Functional*5	Min. 300 m/s <sup>2</sup> {approx. 30 G}
	Destructive*6	Min. 1,000 m/s <sup>2</sup> {approx. 100 G}
Vibration resistance	Functional*7	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, transport and storage*8 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +70°C -40°F to +158°F
	Humidity	5 to 85% R.H.
Unit weight	Approx. 4 g .14 oz	

### TYPICAL APPLICATIONS

- Air conditioner
- Refrigerator
- Hot water units
- Microwave ovens
- Fan heaters

### ORDERING INFORMATION

Ex. A LD 1 12 W

Product name	Contact arrangement	Coil voltage (V DC)	Packing style
LD	1: 1 Form A	4H: 4.5, 09: 9 , 24: 24 05: 5, 12: 12 06: 6, 18: 18	Nil: Tube packing W: Carton packing

UL/CSA, TÜV, VDE approved type is standard.

Note: Tube packing: Tube: 50pcs, Case: 1,000pcs

Carton packing: Carton: 100pcs, Case: 500pcs


# LD (ALD)

## TYPES AND COIL DATA (at 20°C 68°F)


Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.) (Initial)	Drop-out voltage, V DC (min.) (Initial)	Coil resistance, Ω (±10%)	Nominal operating current, mA (±10%)	Nominal operating power, mW	Maximum allowable voltage, V DC (at 20°C 68°F)
ALD14H	4.5	3.38	0.22	101	44.6	200	5.85
ALD105	5	3.75	0.25	125	40.0	200	6.5
ALD106	6	4.5	0.3	180	33.3	200	7.8
ALD109	9	6.75	0.45	405	22.2	200	11.7
ALD112	12	9	0.6	720	16.7	200	15.6
ALD118	18	13.5	0.9	1,620	11.1	200	23.4
ALD124	24	18	1.2	2,880	8.3	200	31.2

## DIMENSIONS

mm inch

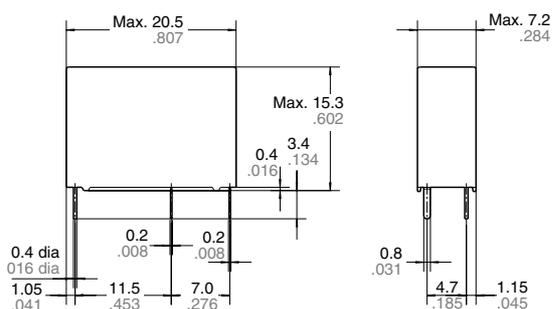

PC board pattern (Bottom view)

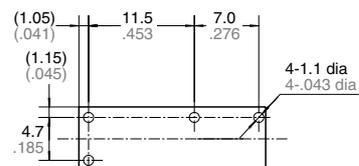

Tolerance: ±0.1 ±.004

Schematic (Bottom view)




**Dimension:**  
 Max. 1mm .039 inch: ±0.1 ±.004  
 1 to 3mm .039 to .118 inch: ±0.2 ±.008  
 Min. 3mm .118 inch: ±0.3 ±.012


**General tolerance**  
 ±0.1 ±.004  
 ±0.2 ±.008  
 ±0.3 ±.012

## REFERENCE DATA

### 1. Max. switching power

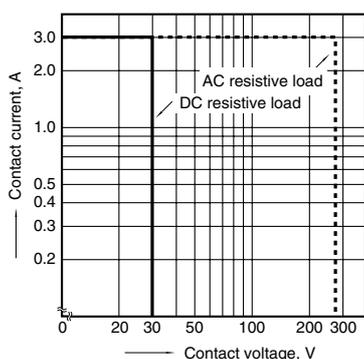


### 2. Life curve

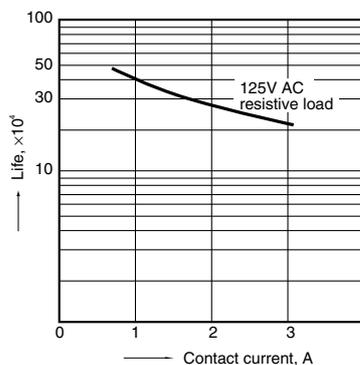


### 3. Coil temperature rise

Sample: ALD112, 6 pcs.  
 Point measured: inside the coil  
 Contact current: 0 A, 3 A

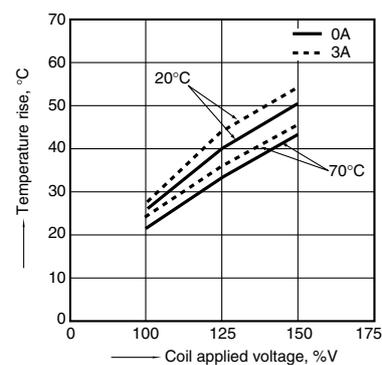


### 4-(1). Operate time

Sample: ALD112, 6 pcs.

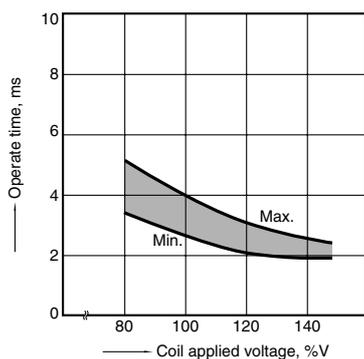


### 4-(2). Release time (without diode)

Sample: ALD112, 6 pcs.

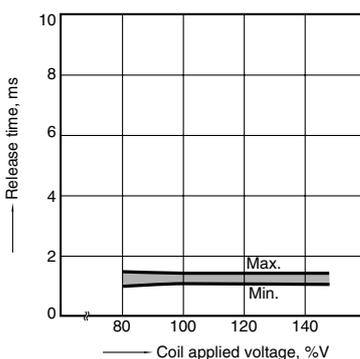


### 4-(3). Release time (with diode)

Sample: ALD112, 6 pcs.

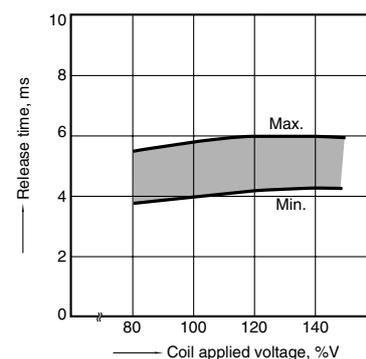


## 5-(1). Electrical life test (3 A 250 V AC, resistive load)


Sample: ALD112, 6 pcs.  
Operating speed: 20 cpm  
Ambient temperature: room temperature  
circuit:

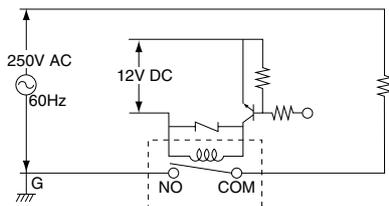

### Change of pick-up and drop-out voltage

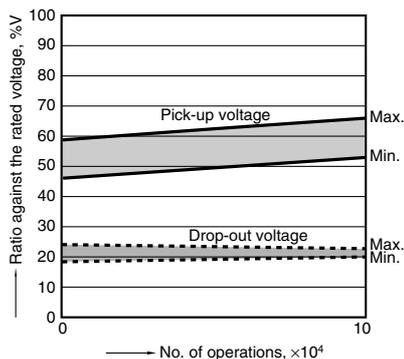


### Change of contact resistance

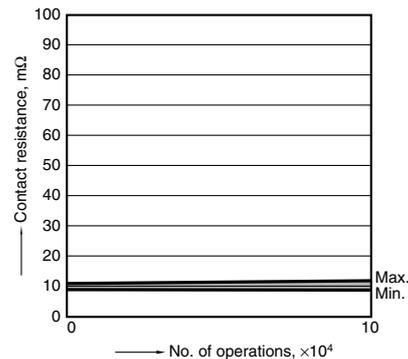


## 5-(2). Electrical life test (3 A 30 V DC, resistive load)


Sample: ALD112, 6 pcs.  
Operating speed: 20 cpm  
Ambient temperature: room temperature  
circuit:

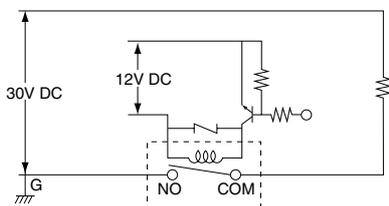

### Change of pick-up and drop-out voltage

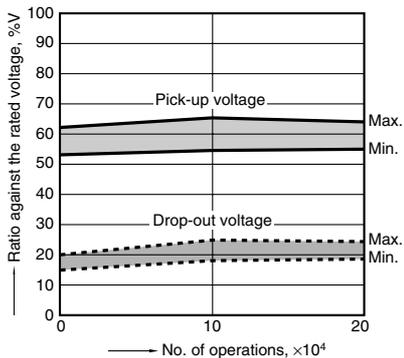

### Change of contact resistance

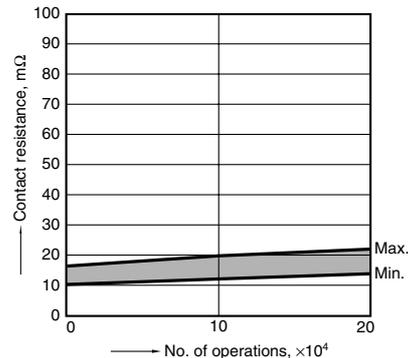

**For Cautions for Use, see Relay Technical Information .**