





玻璃保險絲管 (快斷型)

Glass Tube Fuse(Fast-Acting)250V/125V

STP $\Phi 3.6 \times 10$ ROHS COMPLIANT




REOMAX

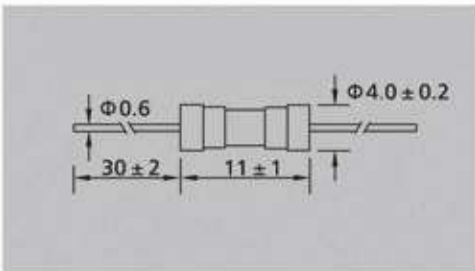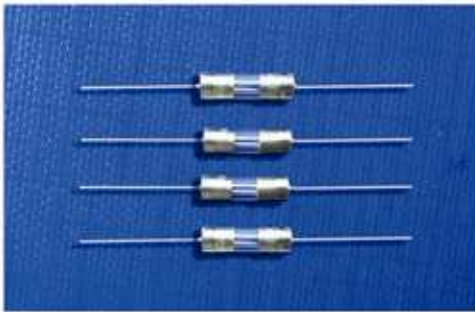

Time-Current Characteristics

電流-時間曲線圖

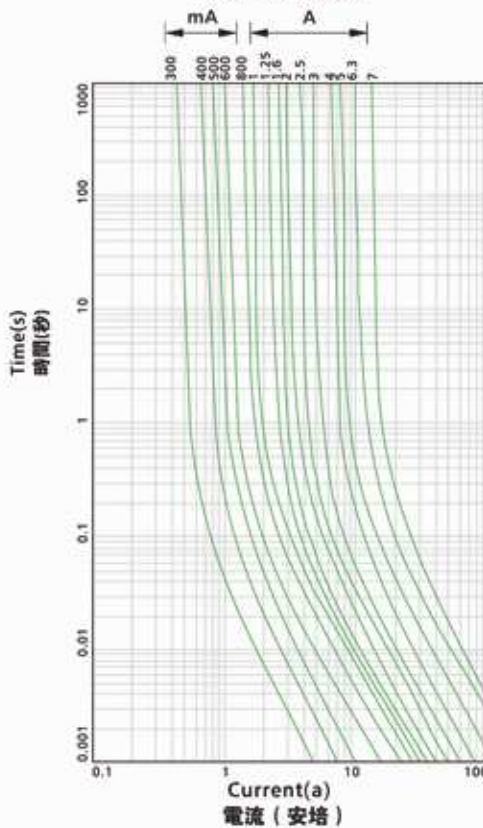

目錄編號 Catalog No.	額定電流 Ampere Rating	額定電壓 Voltage Rating	熔化熱能 I^2T Melting Integral ($A^2.S$)
STP0100A/B	100mA	250V/125V	0.0015
STP0125A/B	125mA	250V/125V	0.0025
STP0160A/B	160mA	250V/125V	0.0042
STP0200A/B	200mA	250V/125V	0.0065
STP0250A/B	250mA	250V/125V	0.010
STP0300A/B	300mA	250V/125V	0.018
STP0315A/B	315mA	250V/125V	0.020
STP0350A/B	350mA	250V/125V	0.025
STP0400A/B	400mA	250V/125V	0.035
STP0500A/B	500mA	250V/125V	0.060
STP0630A/B	630mA	250V/125V	0.150
STP0750A/B	750mA	250V/125V	0.350
STP0800A/B	800mA	250V/125V	0.5
STP1100A/B	1A	250V/125V	0.6
STP1125A/B	1.25A	250V/125V	1.2
STP1150A/B	1.5A	250V/125V	1.6
STP1160A/B	1.6A	250V/125V	1.8
STP1200A/B	2A	250V/125V	2.4
STP1250A/B	2.5A	250V/125V	3.2
STP1300A/B	3A	250V/125V	6.0
STP1315A/B	3.15A	250V/125V	7.0
STP1350A/B	3.5A	250V/125V	7.5
STP1400A/B	4A	250V/125V	8.0
STP1500A/B	5A	250V/125V	15
STP1600A/B	6A	250V/125V	24
STP1630A/B	6.3A	250V/125V	28
STP1700A/B	7A	250V/125V	36

目錄編號: Catalog No. A:250V B:125V

認證 Approvals	電流範圍 Ampere Range	認證號 Certificate No.
	250mA - 5.0A	E340427
	250mA - 5.0A	E340427

額定分斷能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

測試標準:

Testing Standard: UL248-14

電氣特性 Electrical Characteristics:

額定電流的% % of Ampere Rating	熔斷時間 Opening Time
100%	4 hours Min (大于4小時)
200%	60 sec Max (小于60秒)
1000%	10 ms Min (大于10毫秒)

Dongguan Reomax Electronics Co., Ltd.

NO.10,Group2,Datang Village,Dalingshan Town,Dongguan,guangdong Province,523820,P.R.China

TEL:86-769-88030405 85634218 FAX:86-769-85635648

http://www.reomaxfuse.com;www.ruizhoufuse.com E-mail:reomaxfuse@163.com