



DETAIL A



NOTE:

- 1.CABLE IS ATTACHED TO THE UP SIDE OF TOUCH PANEL AT CENTER POINT AS SHOWN
- 2.TALL CONNECTOR:PIICH 1mm

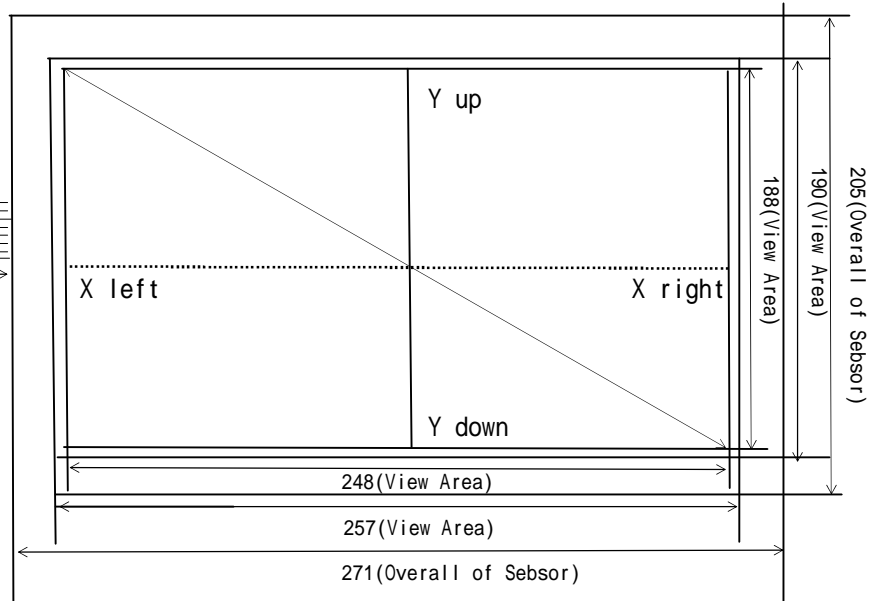

CONNECTOR PINOUT	
PIN NO	ASSIGNMENT
1	X right
2	Y up
3	X left
4	Y down

P/N	COVERSHEET TYPE	GLASS THICKNESS	FINISHED PART	DIMENSION UNIT
8WR121	CLEAR	1.6	1.7	mm

Specification:

Outside Dimension	271mm*205mm
Viewing Area	257mm*190mm
Active Area	248mm*188mm
Surface Hardness	3H
Optical Clarity	80% ↑
Operating Temperature	-10℃~60℃
Endurance Test Strikes	Over1million
Operating Voltage	DC5V
Resistance	200Ω~900Ω
Lineraity	1.5%
Faceplate Surface	Anti-glare coating,glare coating
Film Thickness	0.1mm
Class Thickness	1.6mm
Operation Pressure	20g~150g
Storage Temperature	-30℃~80℃
Message Noise	5m sec~15m sec
Operating Current	5mA~25mA
Humidity	<95%
Isolation Resistance	20MΩ ↑ @ DC25V
Sealable against	dust,water,oil,static



12.1寸八线触摸屏

深圳维纳新科光电有限公司 Winner Electronic Technology		
Model No	Drawn By	Checked By
8WR121	Chen	Hu
Issue Date	2008-7-1	

