

VTON 进口大口径中温蒸汽型电磁阀

VTON-Large caliber type of temperature steam solenoid valve

动作方式：先导式

Motion Pattem: Guide Type

控制方式：常闭

Control Type: Nomally Closde

连接方式：螺纹连接、法兰连接

Connection: Threaded or Flanged

公称通径：DN15~DN200mm

Aperture of Flow Rate: DN15~DN200mm

工作压力：最高 1.6Mpa

Warking-pressure: Max1.6Mpa

适用介质：中性、气态或液态流体

Applicable Fluid: Neutral gas or liquid

介质粘度：≤21 m m²/s

Fluid Viscosity: ≤21 m m²/s

介质温度：≤200℃

Fluid Temperature: ≤200℃

环境温度：-10~+50℃

Ambient Temperature: -10~+50℃

阀体材质：铸钢或 304 不锈钢

Body material: Stainless or steel 304

密封材质：PTFE

Seals material: PTFE


标准电压：AC220V (50/60Hz)、DC24V

Standard Voltage: AC220V (50/60Hz)、DC24V

防护等级：IP65

Protection class: IP65

外形尺寸标准：Dimension Standard

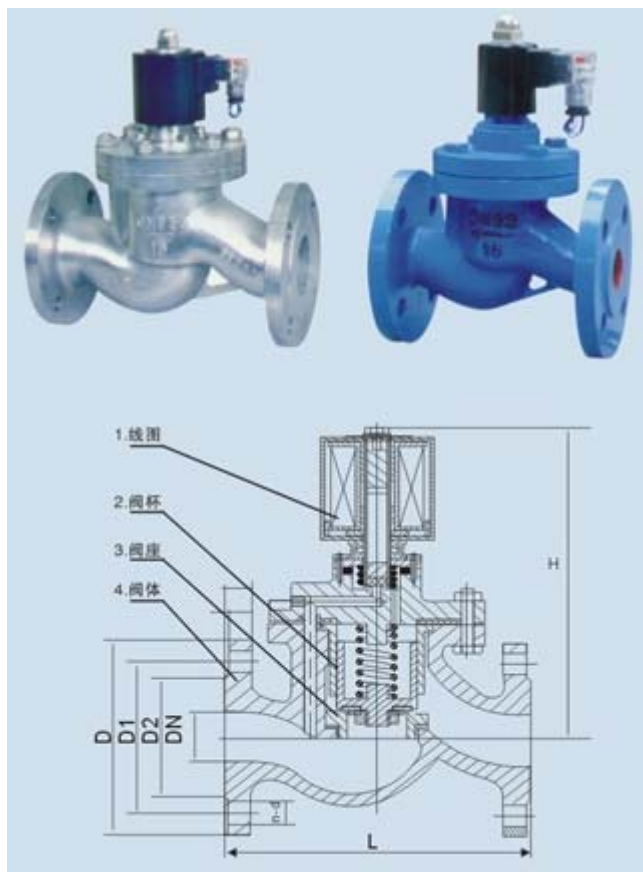

公称通径 (DN)	内螺纹连接 Threaded			法兰连接 Flanged							
	内螺纹	外形尺寸		外形尺寸		法兰尺寸					
	G	H	L	H	L	D	D1	D2	b	f	N-d
15	1/2	148	92	176	130	95	65	46	14	2	4-Φ14
20	3/4	148	92	181	150	105	75	56	16	2	4-Φ14
25	1	148	110	210	160	115	85	65	16	3	4-Φ14
32	1-1/4	182	120	221	180	140	100	76	18	3	4-Φ18
40	1-1/2	182	140	230	200	150	110	84	18	3	4-Φ18
50	2	192	162	252	230	165	125	99	20	3	4-Φ18
65	/	/	/	265	240	185	145	118	20	3	4-Φ18
80	/	/	/	276	270	200	160	132	20	3	8-Φ18
100	/	/	/	373	350	220	180	156	22	3	8-Φ18
125	/	/	/	416	360	250	210	184	22	3	8-Φ18
150	/	/	/	440	444	285	240	211	24	3	8-Φ22
200	/	/	/	480	495	340	295	266	24	3	12-Φ22