

International  
**IR** Rectifier

8ETU04SPbF  
8ETU04-1PbF

## Ultrafast Rectifier

### Features

- Ultrafast Recovery Time
- Low Forward Voltage Drop
- Low Leakage Current
- 175°C Operating Junction Temperature

$$t_{rr} = 60\text{ns}$$

$$I_{F(AV)} = 8\text{Amp}$$

$$V_R = 400\text{V}$$

### Description/ Applications

International Rectifier's FRED.. series are the state of the art Ultra fast recovery rectifiers specifically designed with optimized performance of forward voltage drop and ultra fast recovery time.

The planar structure and the platinum doped life time control, guarantee the best overall performance, ruggedness and reliability characteristics.





These devices are intended for use in the output rectification stage of SMPS, UPS, DC-DC converters as well as free-wheeling diode in low voltage inverters and chopper motor drives.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

### Absolute Maximum Ratings

Parameters	Max	Units
$V_{RRM}$ Peak Repetitive Peak Reverse Voltage	400	V
$I_{F(AV)}$ Average Rectified Forward Current, $T_C = 155^\circ\text{C}$	8	A
$I_{FSM}$ Non Repetitive Peak Surge Current, $T_C = 25^\circ\text{C}$	100	
$I_{FRM}$ Peak Repetitive Forward Current	16	
$T_J, T_{STG}$ Operating Junction and Storage Temperatures	- 65 to 175	$^\circ\text{C}$

### Case Styles

8ETU04SPbF	8ETU04-1PbF
  <b>D<sup>2</sup>PAK</b>	  <b>TO-262</b>

**Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

Parameters	Min	Typ	Max	Units	Test Conditions
V <sub>BR</sub> , V <sub>r</sub> Breakdown Voltage, Blocking Voltage	400	-	-	V	I <sub>R</sub> = 100μA
V <sub>F</sub> Forward Voltage	-	1.19	1.3	V	I <sub>F</sub> = 8A
	-	0.94	1.0	V	I <sub>F</sub> = 8A, T <sub>J</sub> = 150°C
I <sub>R</sub> Reverse Leakage Current	-	0.2	10	μA	V <sub>R</sub> = V <sub>R</sub> Rated
	-	20	500	μA	T <sub>J</sub> = 150°C, V <sub>R</sub> = V <sub>R</sub> Rated
C <sub>T</sub> Junction Capacitance	-	14	-	pF	V <sub>R</sub> = 400V
L <sub>S</sub> Series Inductance	-	8.0	-	nH	Measured lead to lead 5mm from package body

**Dynamic Recovery Characteristics @ T<sub>J</sub> = 25°C (unless otherwise specified)**

Parameters	Min	Typ	Max	Units	Test Conditions
t <sub>rr</sub> Reverse Recovery Time	-	35	60	ns	I <sub>F</sub> = 1.0A, di <sub>F</sub> /dt = 50A/μA, V <sub>R</sub> = 30V
	-	43	-		T <sub>J</sub> = 25°C
	-	67	-		T <sub>J</sub> = 125°C
I <sub>RRM</sub> Peak Recovery Current	-	2.8	-	A	T <sub>J</sub> = 25°C
	-	6.3	-		T <sub>J</sub> = 125°C
Q <sub>rr</sub> Reverse Recovery Charge	-	60	-	nC	T <sub>J</sub> = 25°C
	-	210	-		T <sub>J</sub> = 125°C

**Thermal - Mechanical Characteristics**

Parameters	Min	Typ	Max	Units
T <sub>J</sub> Max. Junction Temperature Range	- 65	-	175	°C
T <sub>Stg</sub> Max. Storage Temperature Range	- 65	-	175	°C
R <sub>thJC</sub> Thermal Resistance, Junction to Case	-	1.8	2.0	°C/W
R <sub>thJA</sub> <sup>①</sup> Thermal Resistance, Junction to Ambient	-	-	50	°C/W
R <sub>thCS</sub> <sup>②</sup> Thermal Resistance, Case to Heatsink	-	0.5	-	°C/W
Weight	-	2.0	-	g
	-	0.07	-	(oz)
Mounting Torque	6.0	-	12	Kg-cm
	5.0	-	10	lbf.in
Marking Device	8ETU04S		Case style D <sup>2</sup> Pak	
	8ETU04-1		Case style TO-262	

① Typical Socket Mount

② Mounting Surface, Flat, Smooth and Greased

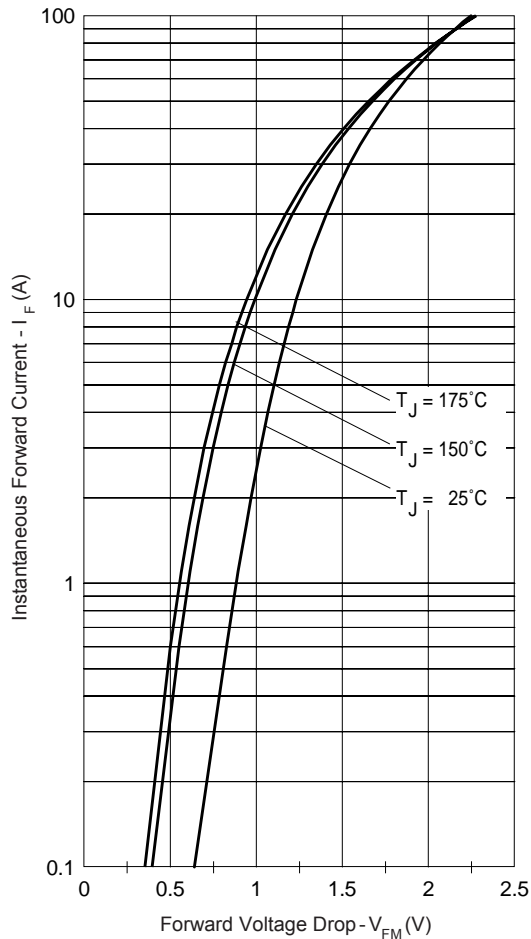


Fig. 1 - Typical Forward Voltage Drop Characteristics

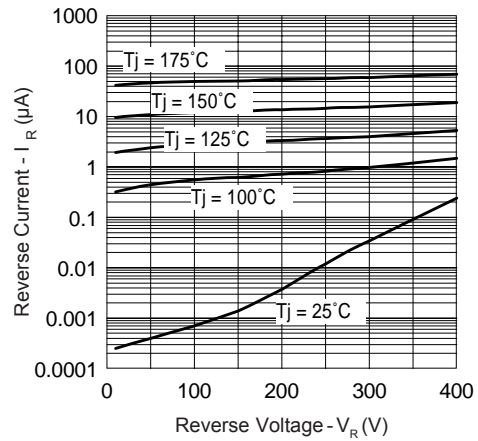


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

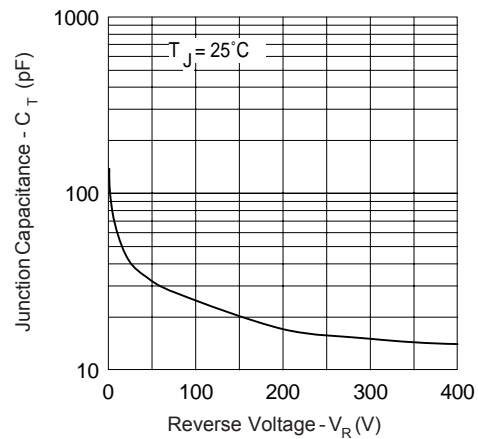


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage



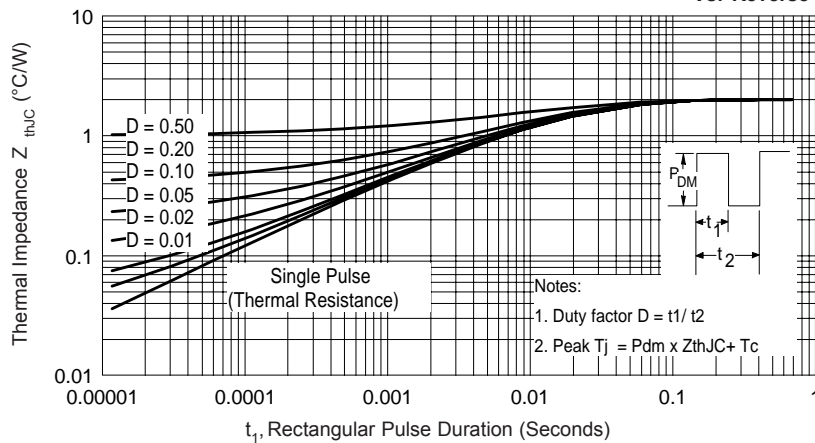



Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

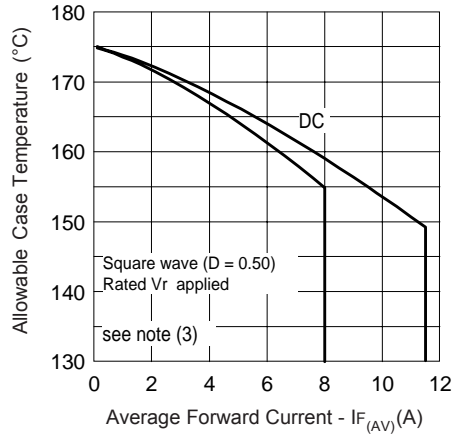


**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

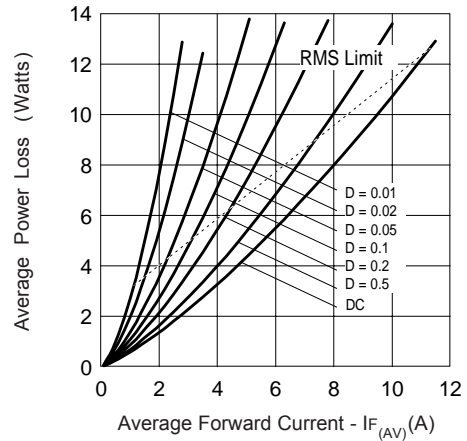

**Fig. 6 - Forward Power Loss Characteristics**

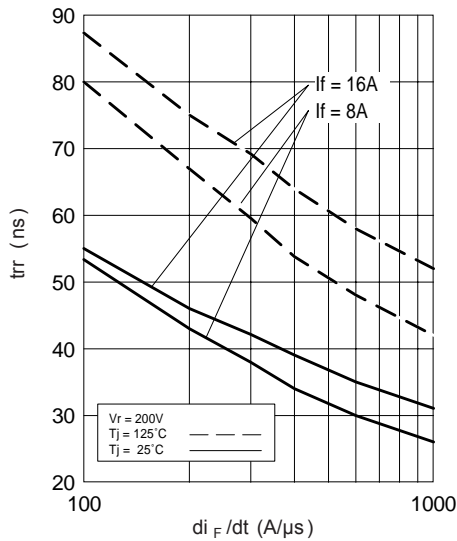

**Fig. 7 - Typical Reverse Recovery vs.  $di_F/dt$**

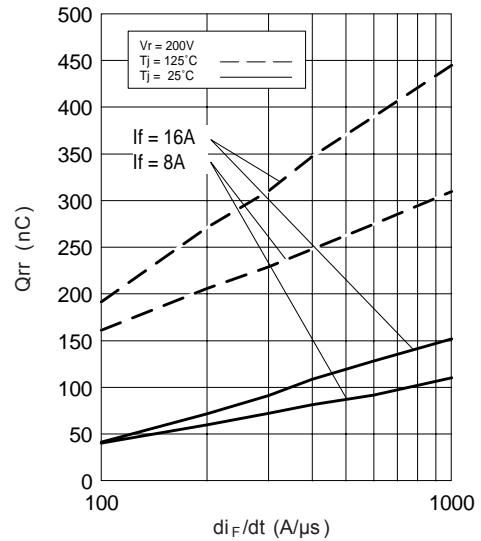

**Fig. 8 - Typical Stored Charge vs.  $di_F/dt$**

(3) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;

$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_R (1-D)$ ;  $I_R @ V_{R1}$  = rated  $V_R$

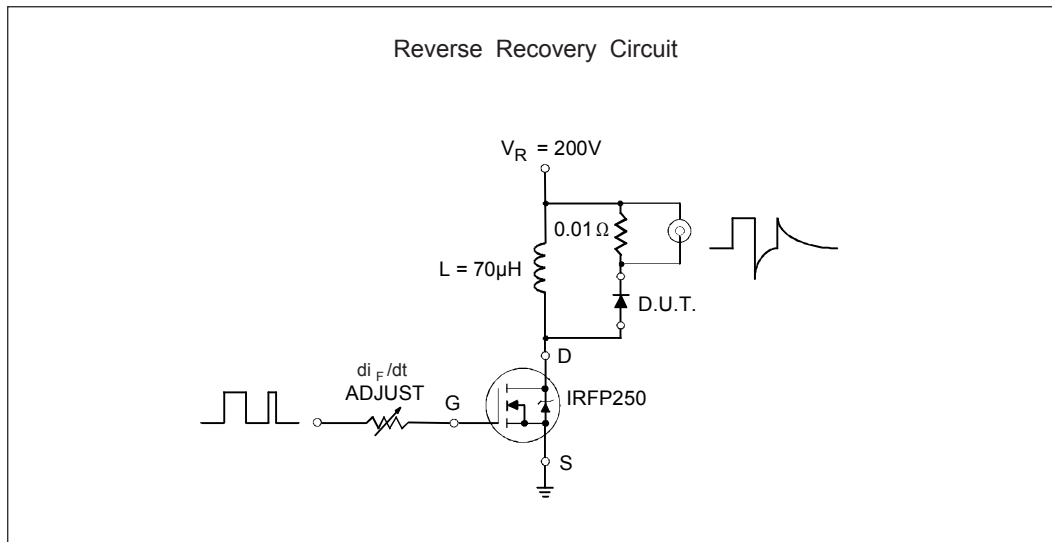


Fig. 9- Reverse Recovery Parameter Test Circuit



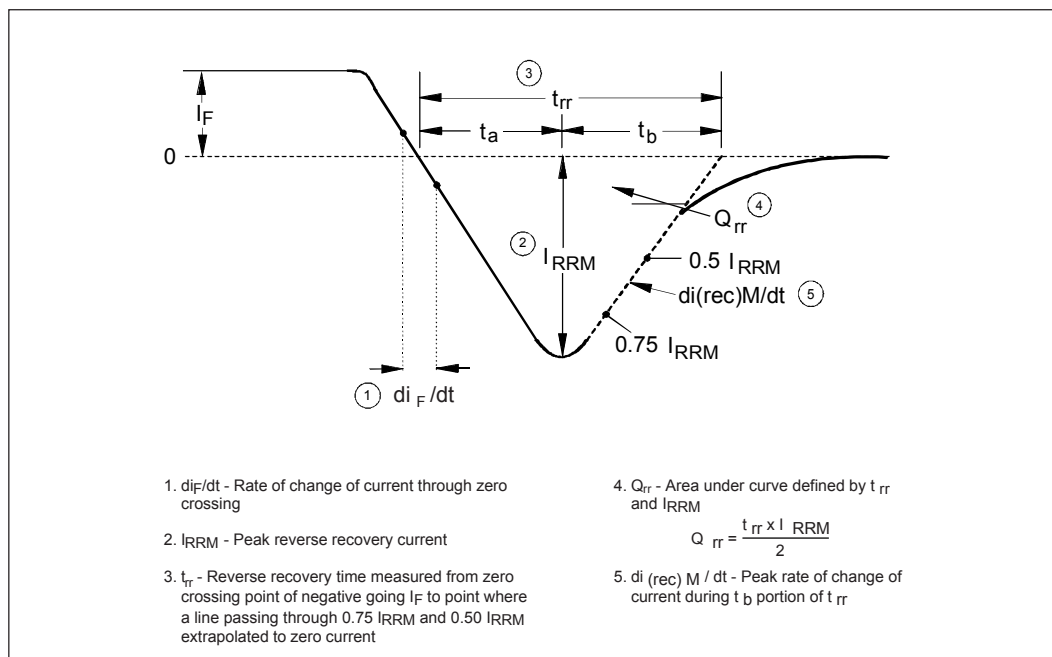


Fig. 10 - Reverse Recovery Waveform and Definitions

## Outlines Table

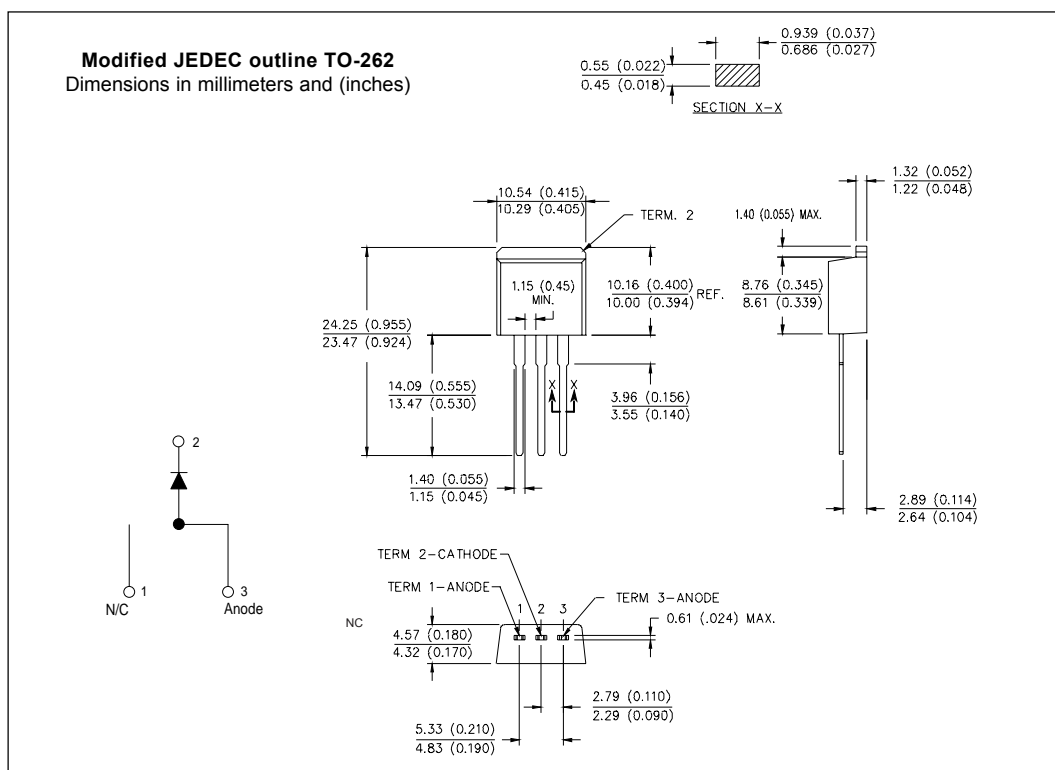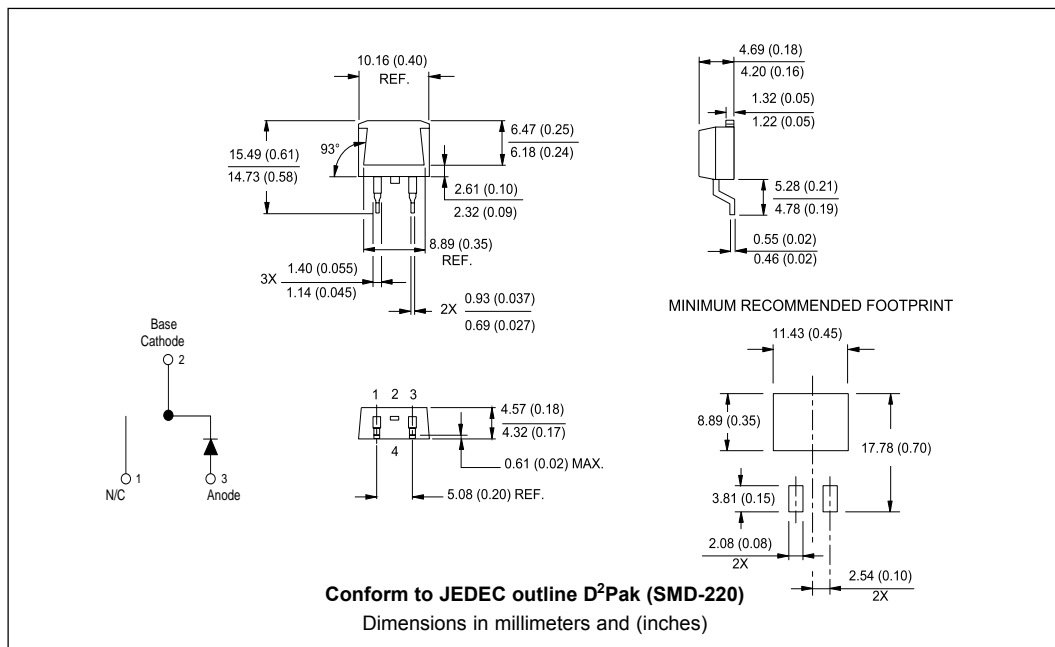


## Part Marking Information

### D<sup>2</sup>PAK

EXAMPLE: THIS IS A 8ETU04S  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000


Note: "P" in assembly line  
position indicates "Lead-Free"

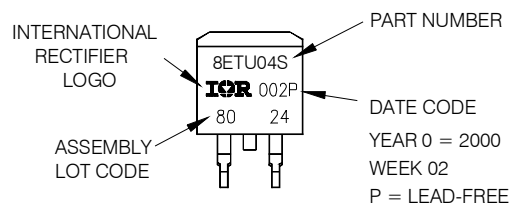


### TO-262

EXAMPLE: THIS IS A 8ETU04-1  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line  
position indicates "Lead-Free"

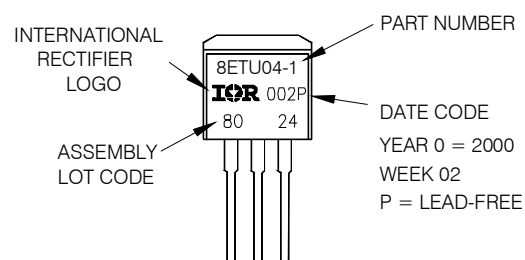

## Tape &amp; Reel Information

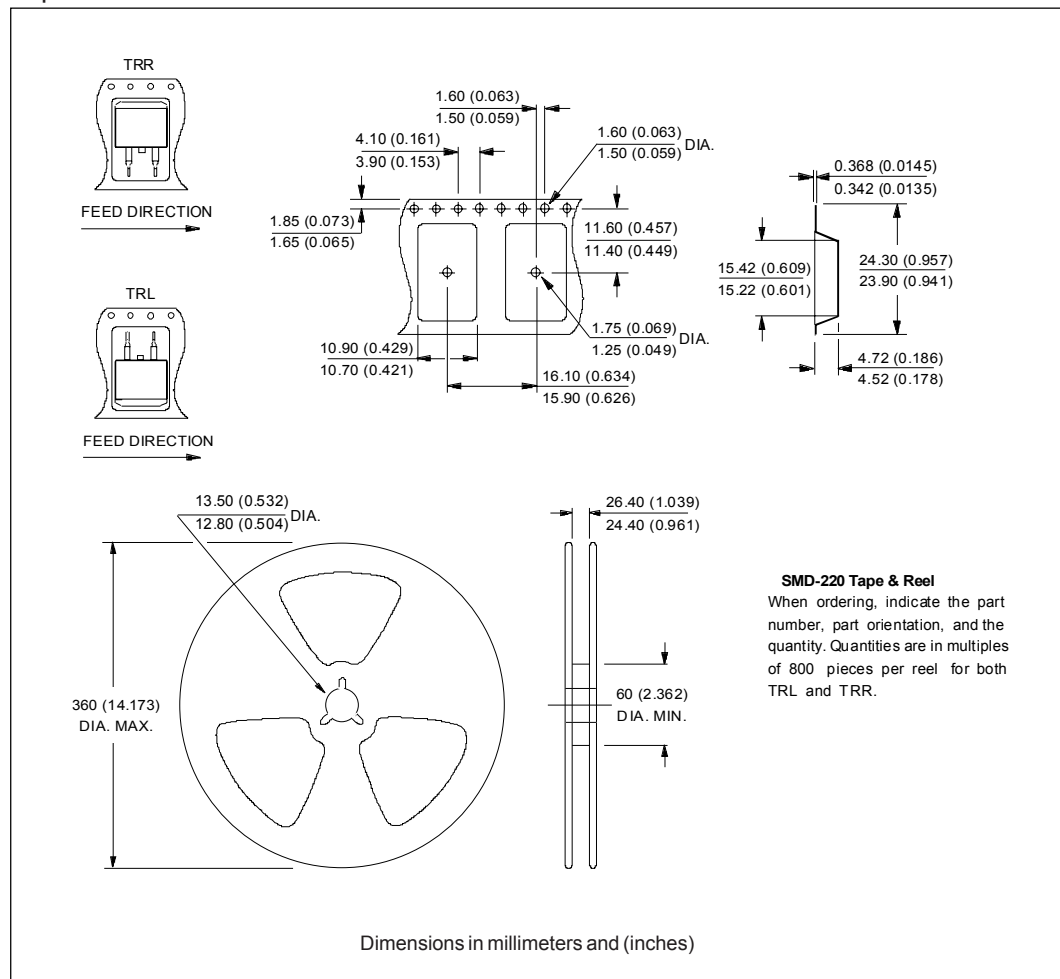



## Ordering Information Table

Device Code							
	8	E	T	U	04	S	TRL PbF
	①	②	③	④	⑤	⑥	⑦ ⑧
<b>1</b>	-	Current Rating (8A)					
<b>2</b>	-	E = Single Diode					
<b>3</b>	-	T = TO-220, D <sup>2</sup> Pak					
<b>4</b>	-	U = Ultrafast Rectifier					
<b>5</b>	-	Voltage Rating (04 = 400V)					
<b>6</b>	-	<ul style="list-style-type: none"> <li>• S = D<sup>2</sup>Pak</li> <li>• -1 = TO-262</li> </ul>					
<b>7</b>	-	<ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented, for D<sup>2</sup>PAk package)</li> <li>• TRR = Tape &amp; Reel (Right Oriented, for D<sup>2</sup>PAk package)</li> </ul>					
<b>8</b>	-	<ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free</li> </ul>					

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.